

Submittal Data: System 18RCLX AUU18RCLX & AOU18RLX



Job Name: _____ Location: _____

Purchaser: _____

Engineer: _____

Submitted To: _____ For: Reference Approval Construction

Submitted By: _____

Capacities:

Cooling	17,800 BTU/h
Min/Max Cooling	5,000-21,500BTU/h
Outdoor Design Temperature <i>F^o DB/WB</i>	95/75
Heating	21,000 BTU/h
Min/Max Heating	5,000-25,600BTU/h
Outdoor Design Temperature <i>F^o DB/WB</i>	47/43
HSPF	8.5
SEER	16.0
EER <i>Cooling/Heating</i>	11.1/10.2
Low Ambient Temp. <i>F^o Cooling/Heating</i>	0/14
Voltage/Frequency/Phase	208-230/60/1

Indoor Unit:

Noise Level Cooling <i>db (A) - H/ M/ L/</i>	42/39/36
Noise Level Heating <i>db (A) - H/ M/ L/</i>	40/38/36
Weight	75 lbs.
Total Height	9-3/4 in.
Space required above ceiling	8-1/2 in.

Outdoor Unit:


Noise Level <i>db (A) - Cooling/Heating</i>	51/53
Recommended Fuse Size	20A
Min. Ampacity	15.4A
Running Current Cooling (<i>Rated/Max</i>)	7.0/12.5
Running Current Heating (<i>Rated/Max</i>)	8.9/12.5
Weight	141 lbs.

Refrigerant Piping:

Max Ht. Difference	65 ft.
Max Total or Combined Length	165 ft. each
Discharge Vapor Line (O.D.)	1/4 in.
Suction (O.D.)	1/2 in.

Note: Figures are based on 230 Volts

OUTLINE AND DIMENSIONS

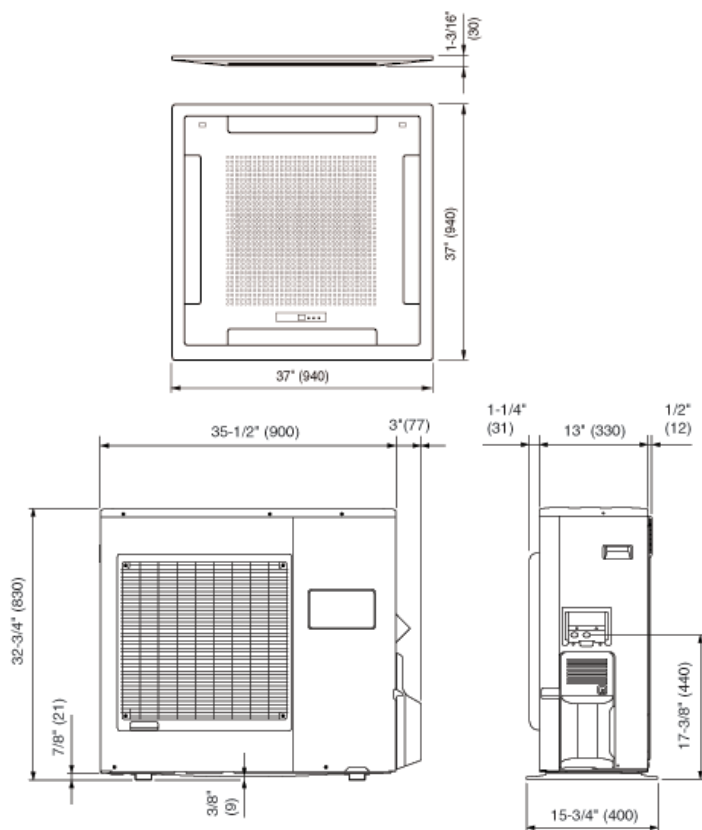

Standard Features:

- ◆ Six year compressor warranty
- ◆ Two year parts warranty
- ◆ Weekly timer
- ◆ Auto Louver: Up/Down
- ◆ Energy saver; Slender Fit
- ◆ Pump Down Operation
- ◆ Full Function Wired Remote Control
- ◆ Cold Prevention
- ◆ Built in Low Ambient
- ◆ Auto Restart/ Reset
- ◆ Refrigerant R410A
- ◆ High Ceiling Mode
- ◆ Branch Duct Capable
- ◆ Auto Mode; Quiet Mode; Dry Mode

Notes:
