

# F/CE

30 - 50 - 70

SPECIALTY




McCORMICK

Tractor Model		X4.30F/GE ROPS	X4.50F/GE ROPS	X4.70F/GE ROPS
<b>Engine</b>				
Rated Engine HP @ 2200 RPM (ISO)	HP (kW)	68 (50)	79 (58)	95 (70)
Max Engine HP @ 2200 RPM (ISO)	HP (kW)	71 (52)	90 (66)	102 (75)
Max. Engine Torque @ 1600 RPM	lb ft (Nm)	200 (272)	278 (378)	302 (410)
Engine Type		DEUTZ liquid cooled diesel engine; EPA Tier 4 final compliant using <i>only</i> cooled EGR + DOC system ( <i>no regeneration</i> )		
Engine Size		2.9 Liter, 4-cylinder		
Fuel Capacity	gal (liter)	17 (65)		
<b>Drive Train</b>				
Standard Transmission		16 x 16 speeds with creeper gear; synchronized mechanical shuttle: 25 mph (40 kph) transport speed		
Optional Transmission (1)		15 x 15 speeds; hydraulic power shuttle: 25 mph (40 kph) transport speed		
Optional Transmission (2)		40 x 40 speeds with creeper gear & 2-speed power shift; hydraulic power shuttle; 25 mph (40 kph) transport speed		
Clutch		Independent dual dry clutch standard; 11 inch		
Brakes		Heavy duty wet multi-disc disc brakes		
Differential Lock		Limited slip		
4wd Front Axle		Electro-hydraulic engagement with integrated front axle brakes		
<b>Hydraulics, 3-point Hitch, PTO</b>				
Standard Hydraulic Pump	gpm (lpm)	Double Pump: 20.6 (78) total flow: Dedicated steering pump 7.4 (28); implement pump 13.2 (50)		
Standard Rear Remote Valves		2 valves; 1 standard + 1 float		
Optional Rear Remote Valves (1)		2 valves; 1 motor with flow divider + 1 float		
Optional Rear Remote Valves (2)		2 valves; 1 motor with flow divider + 1 kick out		
Standard Rear 3-point Hitch Type		Category 2 with fixed ball ends; mechanical lift control		
Optional Rear 3-point Hitch Type		Category 2 with quick attach hooks; electronic lift control option ( <i>F Series Only</i> )		
Rear 3-point Lift Capacity	lb (kg)	5,732 (2600) standard		
Rear PTO		2 Speeds (540/1000 rpm) standard; groundspeed PTO optional		
<b>Operator's Area</b>				
ROPS Area		Open Station ROPS; rubber footdeck with adjustable steering wheel and suspended seat		
Seat and Front Dash		Deluxe air suspended seat; tilt and telescopic steering wheel		
Wheelbase	in (mm)	84 (2134)		
Overall Length	in (mm)	112 (2845)		
Base Weight <i>without ballast</i>	lb (kg)	5,842 (2650)		

All above specifications are manufacturer's calculated estimates.

Minimum Widths

F Series: 44 inches  
GE Series: 47.5 inches

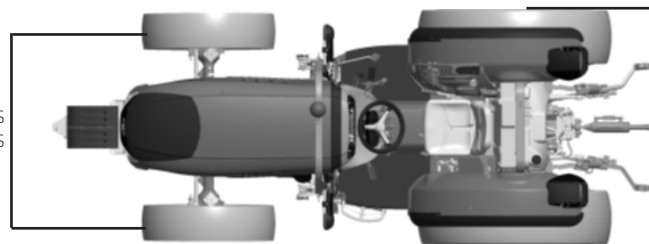

F Series: 51.7 in  
GE Series: 53.15 in

Minimum Heights

F Series: 16.25 in  
GE Series: 15.7 in



89 inches