




2020 | LAWN AND GARDEN CATALOG



## THE 2020 FAMILY LINEUP CATALOG

Introducing New Products & Accessories That Exceed The Demands & Rigors of Professionals and Homeowners Alike.

# DEPENDABILITY IS A HABIT

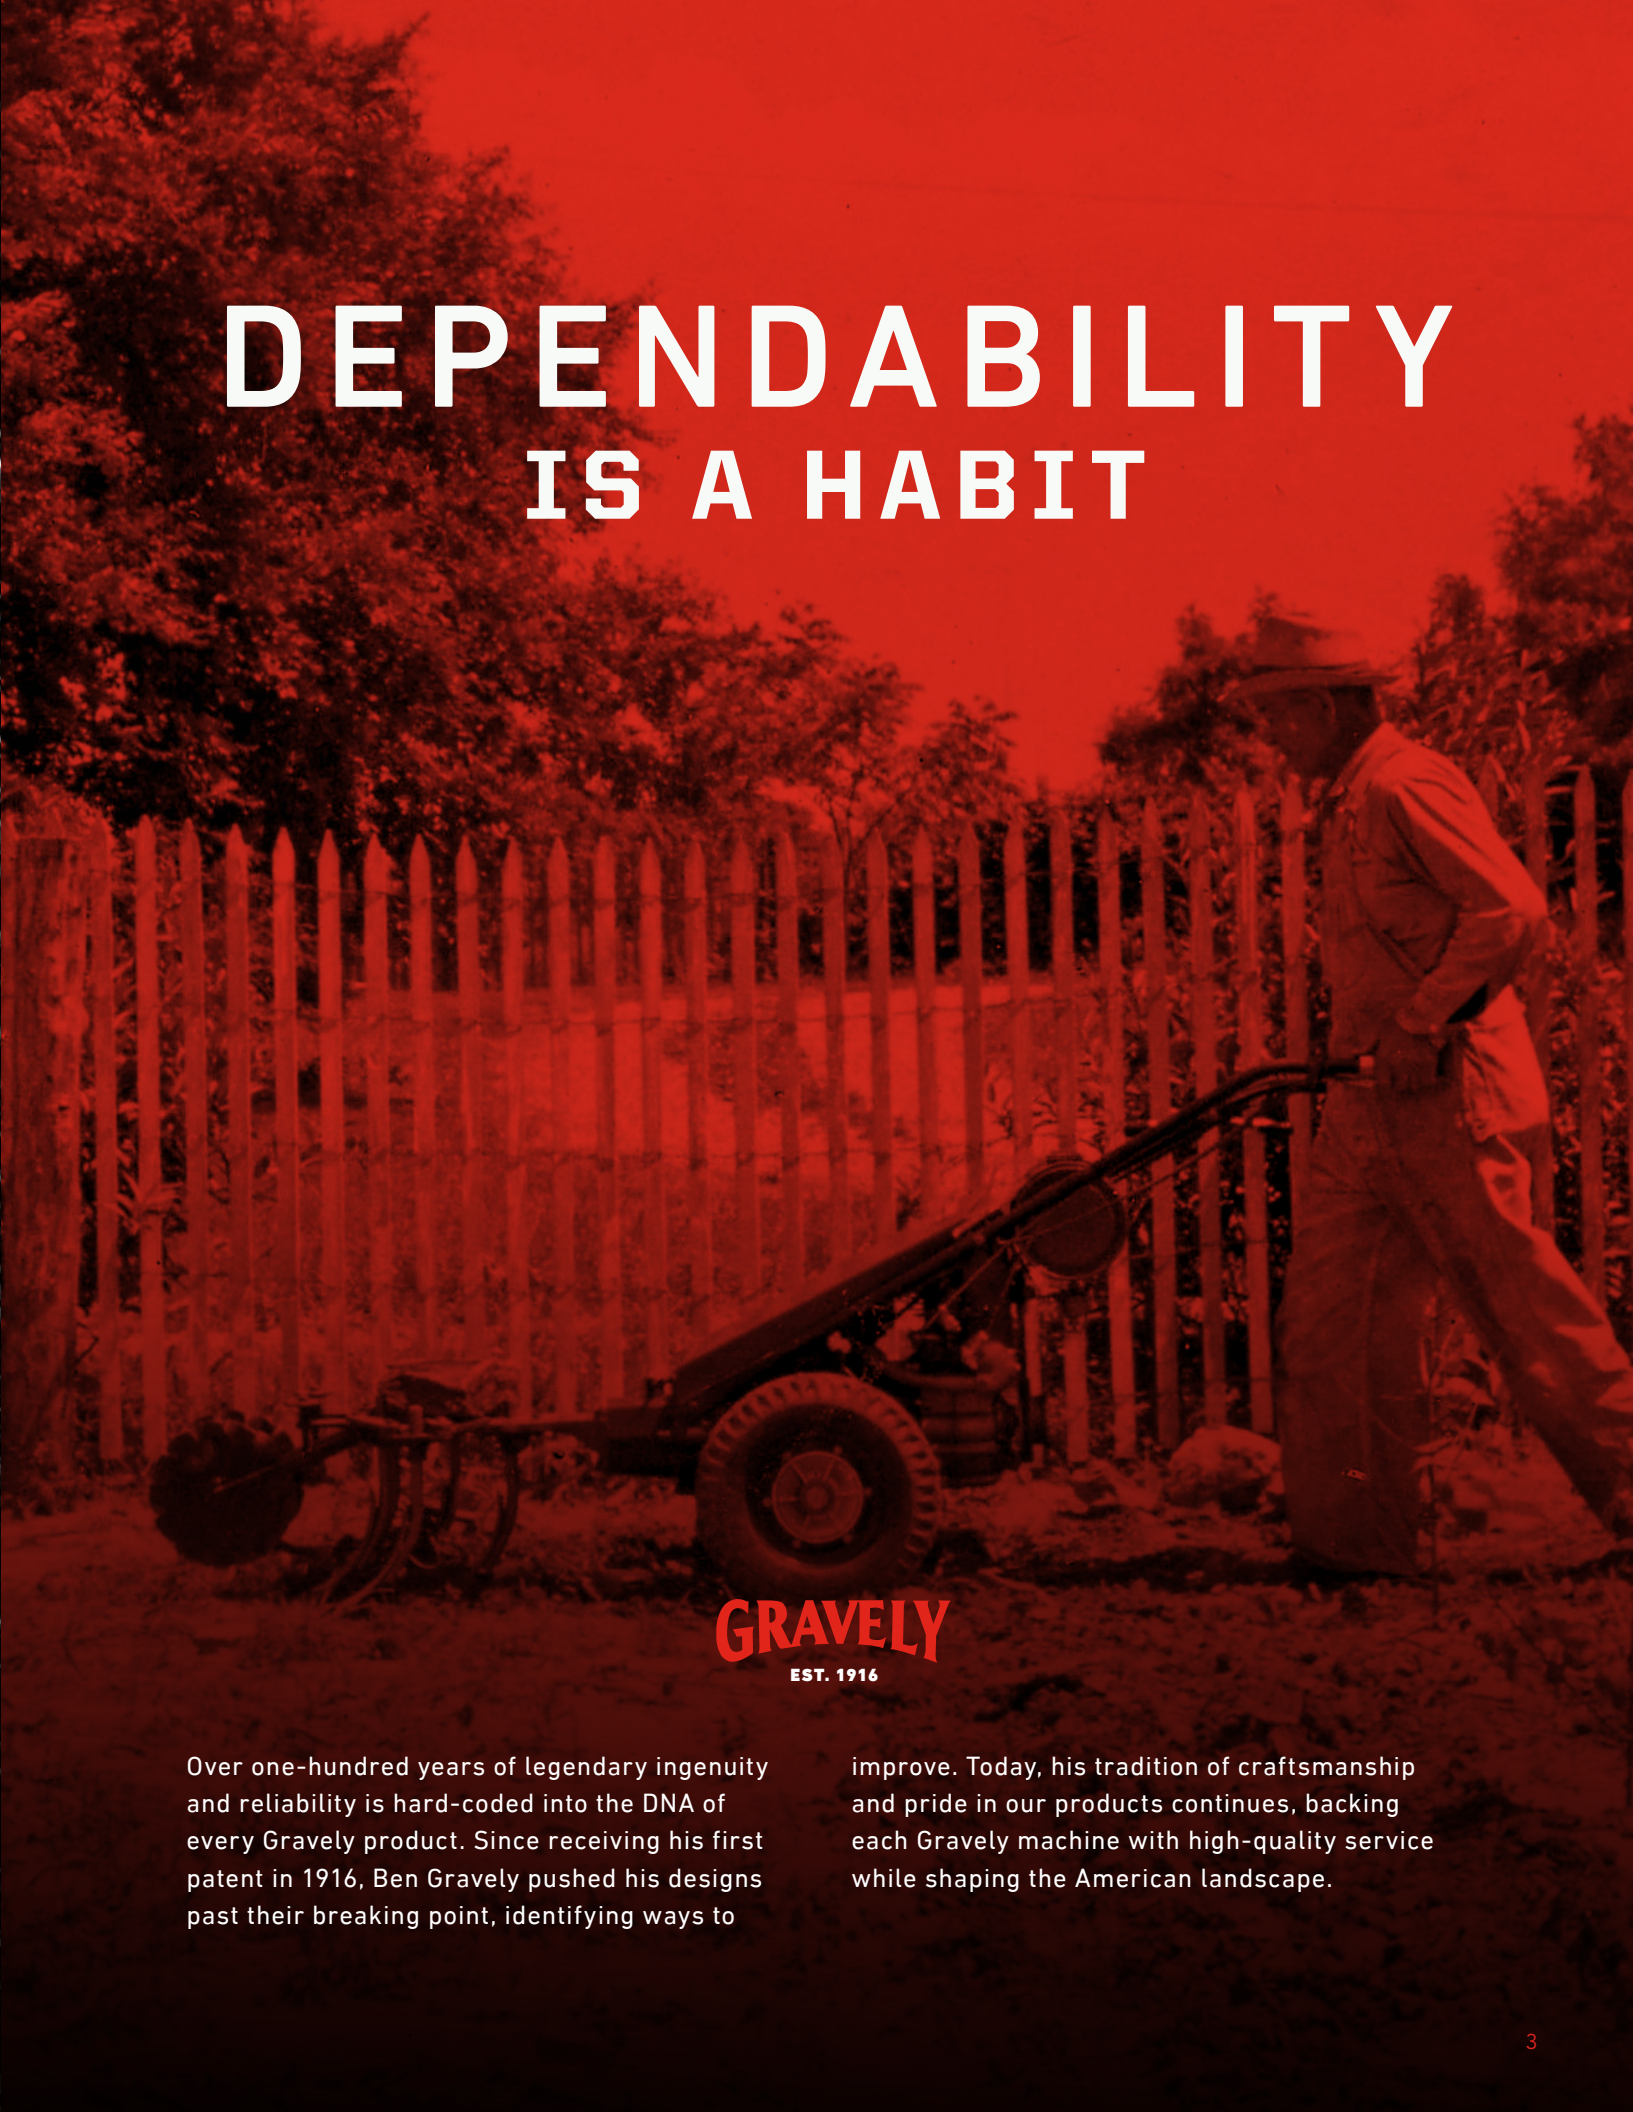

**GRAVELY**  
EST. 1916

Over one-hundred years of legendary ingenuity and reliability is hard-coded into the DNA of every Gravely product. Since receiving his first patent in 1916, Ben Gravely pushed his designs past their breaking point, identifying ways to

improve. Today, his tradition of craftsmanship and pride in our products continues, backing each Gravely machine with high-quality service while shaping the American landscape.




# **BUILT** TO MOW THE **DISTANCE**

Insist on better. Just like you, your machines are required to do more than their share. Success depends on imposing your will on the landscape 365 days a year, and Mother Nature refuses to meet halfway. That's why Gravelly commercial equipment is designed to overcome obstacles nature continues to dish out. Each day we come to work ready to improve on the legendary reliability that's refused to compromise for over a century.



# EVERY SEASON GROW

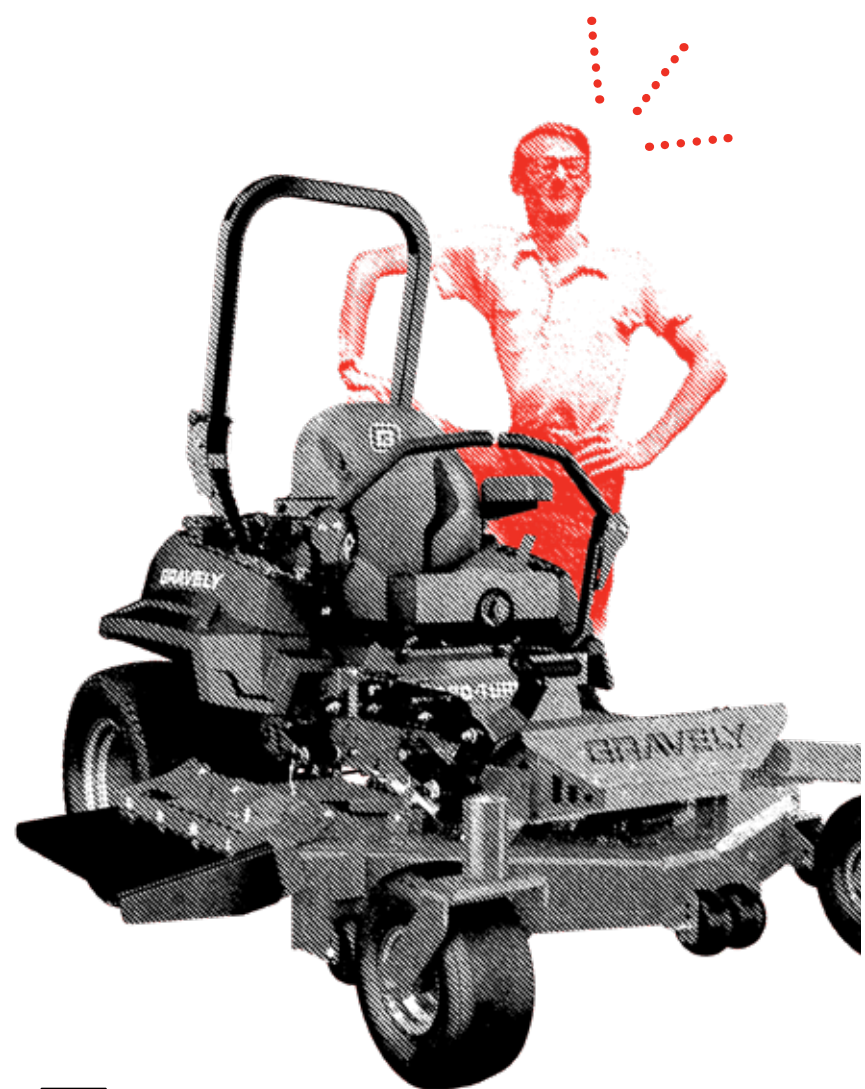

There's a hundred years of performance packed into each of our models. We're proud to share the longest lasting, most comfortable mowers we've ever made. And after a century of designing and crafting, that's saying something. Experience is a great teacher. Each year brings a new crop of lessons and an opportunity to do what you do that much better. The 2020 lineup of Gravelly® lawn & garden equipment is our best yet.

# A LITTLE SMARTER

# TESTING OUR DESIGNS IS A FULL-TIME JOB

Before a concept becomes a product, we test our designs. Then we test them again. That's what makes Gravelly commercial equipment stand out from the competition. Product testing begins in a simulated digital environment, but real testing takes place at Sebring International Raceway and

on a variety of grass and turf around the globe. We put every design through several thousand hours of close examination, ensuring our products outperform the standard. And that's what earns a product the Gravelly name.

PRECISELY  
REDESIGNED  
AROUND  
**YOU**

**DOWNTIME IS  
NOT AN OPTION.**

We reengineered our 2020 lineup  
for easier maintenance to keep  
you up and running all season.



THE RIGHT TOOL

FOR EVERY JOB

CUSTOMIZE YOUR TOOL KIT TO MAXIMIZE BUSINESS SUCCESS.

# UNMATCHED DURABILITY. UNCOMPROMISED PERFORMANCE.

TACKLE EVERY

TIGHT CORNER

LONG HAUL

OR TOUGH SPOT

THE DAY THROWS AT YOU.





# COMMERCIAL PRODUCTS

**WE MEAN BUSINESS.**

The proof is in the performance. Smarter controls, longer run times, less maintenance and more comfort. The Gravely Pro-Turn series is raising the standard of professional performance. Experience the difference a century of craftsmanship makes.

# COMMERCIAL

# ZERO-TURNS

## COMPACT- PRO

## PRO-TURN Z

## PRO-TURN ZX

## PRO-TURN 100

## PRO-TURN 200

## PRO-TURN MACH ONE

## PRO-TURN 400



ENGINE	KAWASAKI® FX	GRAVELY®	KAWASAKI® FX	KAWASAKI® FX YAMAHA® MX KOHLER® EZT - EFI KOHLETR® ZT	KAWASAKI® FX YAMAHA® MX YAMAHA® MX - EFI KOHLER® ZT KOHLER® ECV - EFI	KAWASAKI® FX	KAWASAKI® FX YAMAHA® MX - EFI KOHLER® ECV - EFI
AIR FILTRATION	HEAVY DUTY AIR CLEANER	HEAVY DUTY AIR CLEANER	HEAVY-DUTY AIR CLEANER	HEAVY-DUTY AIR CLEANER	HEAVY-DUTY AIR CLEANER	HEAVY-DUTY AIR CLEANER	HEAVY-DUTY AIR CLEANER
HORSEPOWER	15.5 - 19 HP	26.5 HP	22 - 23.5 HP	22 HP - 26 HP	25 HP - 31 HP	31 HP	27 HP - 35 HP
DRIVE SYSTEM	HYDRO-GEAR® ZT-3100 TRANSAXLES	HYDRO-GEAR® ZT-3100 TRANSAXLES	HYDRO-GEAR® ZT-3200 TRANSAXLES	HYDRO-GEAR® ZT-3400 TRANSAXLES	HYDRO-GEAR® ZT-5400 TRANSAXLES	HYDRO-GEAR® ZT-5400 TRANSAXLES	HYDRO-GEAR® ZT-5400 TRANSAXLES
FUEL CAPACITY	7.2 GAL.	5 GAL.	5 GAL.	10 GAL.	13.4 GAL.	13.4 GAL.	13.4 GAL.
GROUND SPEED	7 MPH / 3 MPH	8 MPH / 4 MPH	8.5 MPH / 4 MPH	10 MPH / 5 MPH	13 MPH / 6 MPH	13 MPH / 6 MPH	13 MPH / 6 MPH
<b>DECK</b>							
DECK MATERIAL	10 GA. STEEL W/ 10 GA. SPINDLE REINFORCEMENT	10 GA. STEEL W/ 10 GA. SPINDLE REINFORCEMENT	10 GA. STEEL W/10 GA. SPINDLE REINFORCEMENT	7 GA. STEEL W/ 1/4 IN. SPINDLE REINFORCEMENT	7 GA. STEEL W/ 1/4 IN. SPINDLE REINFORCEMENT	7 GA. STEEL W/ 1/4 IN. SPINDLE REINFORCEMENT	7 GA. STEEL W/ 1/4 IN. SPINDLE REINFORCEMENT
CUTTING WIDTH	34 IN., 44 IN.	48 IN., 52 IN., 60 IN.	48 IN., 52 IN., 60 IN.	48 IN., 52 IN., 60 IN.	52 IN., 60 IN., 72 IN.	60 IN.	52 IN., 60 IN., 72 IN.
CUTTING HEIGHTS	1 IN. - 5 IN.	1.5 IN. - 5 IN.	1.5 IN. - 5 IN.	1.5 IN. - 5.5 IN.	1.5 IN. - 5.5 IN.	1.5 IN. - 5.5 IN.	1.0 IN. - 5.5 IN.
<b>WHEELS</b>							
FRONT	SMOOTH 13 X 6.5-6	SMOOTH 13 X 6.50-6	SMOOTH 13 X 6.50-6	SMOOTH 13 X 6.50-6	SMOOTH 15 X 6-6	SMOOTH 15 X 6-6	SMOOTH 15 X 6-6 SEMI PNEUMATIC
REAR	TURF 21 X 7-10 TURF 20.5 X 8-10	TURF 22 X 10-12 TURF 22 X 10.5-12 TURF 22 X 12-12	TURF 22 X 10-12 TURF 22 X 10.5-12 TURF 22 X 12-12	TURF 23 X 10.50-12	TURF 23 X 10.5-12 TURF 24 X 12-12	TURF 24 X 12-12	RADIAL TURF 23 X 10-12 RADIAL TURF 24 X 12-12
<b>FEATURES</b>							
SEAT	HIGH BACK W/ EVC SUSPENSION	HIGH BACK COMFORT W/ INTEGRATED ISOLATION	HIGH BACK COMFORT W/ INTEGRATED ISOLATION	HIGH BACK W/ FULL SUSPENSION	HIGH BACK W/ FULL SUSPENSION & PADDED ARMRESTS	HIGH BACK W/ FULL SUSPENSION & PADDED ARMRESTS	HIGH BACK AIR RIDE SUSPENSION W/ SEAT ISOLATORS
FUEL GAUGE	STANDARD	N/A	N/A	STANDARD	STANDARD	STANDARD	STANDARD
<b>WARRANTY</b>							
UNIT	4 YEAR / 750 HOUR LIMITED COMMERCIAL / NO HOUR LIMIT FIRST 2 YEARS	4 YEAR / 750 HOUR LIMITED COMMERCIAL	4 YEAR / 750 HOUR LIMITED COMMERCIAL	5 YEAR / 1000 HOUR COMMERCIAL NO HOUR LIMIT FIRST 2 YEARS	5 YEAR / 1250 HOUR COMMERCIAL NO HOUR LIMIT FIRST 2 YEARS	5 YEAR / 1250 HOUR COMMERCIAL NO HOUR LIMIT FIRST 2 YEARS	5 YEAR / 1500 HOUR COMMERCIAL NO HOUR LIMIT FIRST 2 YEARS
DECK SHELL & FRAME	N/A	N/A	N/A	LIMITED LIFETIME	LIMITED LIFETIME	LIMITED LIFETIME	LIMITED LIFETIME





# COMPACT- PRO<sup>®</sup>

## PACKED WITH PERFORMANCE.

Loaded with state-of-the-art features, the agile Compact-Pro<sup>®</sup> offers full commercial strength in a smaller frame. These zero-turn mowers deliver performance, power and durability with maximum versatility.



NO HOUR LIMIT  
FIRST TWO YEARS

See your professional  
Gravely<sup>®</sup> dealer for  
complete warranty details.



### FUEL TANK DESIGN

Increases stability and improves machine handling and visibility.



### SMALLER FOOTPRINT

The Compact-Pro<sup>®</sup> easily passes through gates as narrow as 36" and nimbly maneuvers around common residential obstacles.



### KAWASAKI ENGINE

Powered by a Kawasaki<sup>®</sup> FX Engine that touts a heavy-duty canister air cleaner to optimize performance in all conditions and extend engine life.



Exclusive to Gravely, SideKick brings comfort and accessibility even closer. Designed with you in mind, SideKick allows operators to focus on the task at hand without the distraction of searching for throttle, choke or deck engagement. Combine that with a compact design and the power of a Kawasaki<sup>®</sup> FX engine and you've got a mower that fully compliments your arsenal of Gravely power.

MODEL NUMBER	ENGINE	DECK SIZE
991144	15.5 HP, 603 CC KAWASAKI <sup>®</sup> FX	34 IN.
991145	19 HP, 603 CC KAWASAKI <sup>®</sup> FX	44 IN.

# PRO-TURN® Z



## WORKS AS HARD AS YOU DO.

Topline performance, baseline price. The Pro-Turn® Z's new canister filtration system takes on the dirtiest of jobs without taking a toll on the engine, while upgraded comfort features keep those long days from taking a toll on your body.



See your professional Gravely® dealer for complete warranty details.

MODEL NUMBER	ENGINE	DECK SIZE
991192	26.5 HP, GRAVELY®	48 IN.
991194	26.5 HP, GRAVELY®	52 IN.
991196	26.5 HP, GRAVELY®	60 IN.

### SEAT ISOLATION

Make all-day mowing sessions more comfortable with a plush, high-back seat designed with vibration isolation.



### GRAVELY® ENGINE

A two-stage canister design filters higher volumes of dust, dirt and other particulates more effectively, giving added protection to the engine.

# PRO-TURN® ZX



## PUT EVERY PENNY TO WORK.

This proven performer is built to complete the toughest commercial job while keeping costs in check. And like every Gravely® mower, it comes backed by an unbeatable warranty.



See your professional Gravely® dealer for complete warranty details.

MODEL NUMBER	ENGINE	DECK SIZE
991230	22 HP, 726 CC KAWASAKI® FX691V	48 IN.
991232	22 HP, 726 CC KAWASAKI® FX691V	52 IN.
991234	23.5 HP, 726 CC KAWASAKI® FX730V	60 IN.


### ROLLOVER PROTECTION STRUCTURE

Safety gets simpler with the foldable Rollover Protection Structure (ROPS) that's standard on all Pro-Turn series mowers.



### KAWASAKI® FX ENGINE

Powerful and easy to maintain, this workhorse has a four-stroke, v-twin design with commercial canister air filtration to ensure maximum power and torque in the toughest conditions.





# PRO-TURN® 100



## SUCCEED, DON'T SETTLE.

Put your best foot forward with the power and performance of the Pro Turn® 100. Packed with Gravely's time-tested features, this hard-working mower stands up to your toughest jobs.



**NO HOUR LIMIT FIRST TWO YEARS**  
**LIMITED LIFETIME DECK SHELL & FRAME**  
See your professional Gravely® dealer for complete warranty details.

MODEL NUMBER	ENGINE	DECK SIZE
991128	22 HP, 726 CC KAWASAKI® FX691V	48 IN.
991129	22 HP, 726 CC KAWASAKI® FX691V	52 IN.
991132	23 HP, 747 CC KOHLER® ZT730	52 IN.
991135	22 HP, 725 CC KOHLER® EZT725 EFI	52 IN.
991130	23.5 HP, 726 CC KAWASAKI® FX730V	60 IN.
991133	25 HP, 747 CC KOHLER® ZT740	60 IN.
991136	25 HP, 747 CC KOHLER® EZT740 EFI	60 IN.
991140	26 HP, 824 CC YAMAHA® MX800V	60 IN.



### ROLLOVER PROTECTION STRUCTURE

Foldable Rollover Protection Structure (ROPS) comes standard on all Pro-Turn series mowers.



### LINE OF SITE

Human-centered design improves the operator experience, providing a clear line of sight to the deck cutting edge.



### SEATING SYSTEM

A full-suspension seat provides added lateral stability and improved durability with vibration control and a four-inch seat slide for all-day comfort.




# PRO-TURN<sup>®</sup> 200

## NEVER CUT EXPECTATIONS.

Smart design and durability are packed into the Pro-Turn 200. Nimble and comfortable, the 200 delivers performance season after season with a full-suspension seat system and a 7-gauge X-Factor II deck.



NO HOUR LIMIT FIRST TWO YEARS  
LIMITED LIFETIME DECK SHELL & FRAME  
See your professional Gravely<sup>®</sup> dealer for complete warranty details.

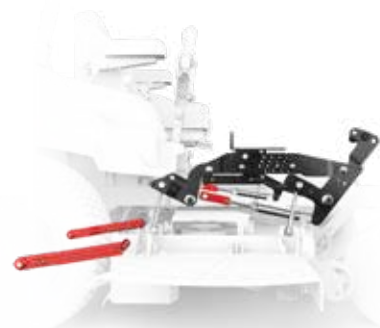

### DECK LEVEL DESIGN

A simple four-point adjustment uses half the parts, making it quick and easy to adjust and maintain for superior cutting performance.



### STEEL CHASSIS

A heavy-duty, 1.5-inch x 3-inch steel, tubular frame is fabricated with four engine frame isolation points to reduce cockpit vibration by 45% while reducing operator fatigue.



### CBT SYSTEM

Our exclusive Constant Belt Tension System (CBT) ensures belt tension is maintained, keeping the blade tip speed and cutting results consistent.

MODEL NUMBER	ENGINE	DECK SIZE
992268	27 HP, 852 CC KAWASAKI <sup>®</sup> FX850V	52 IN.
992267	25 HP, 747 CC KOHLER <sup>®</sup> ZT740	60 IN.
992269	27 HP, 852 CC KAWASAKI <sup>®</sup> FX850V	60 IN.
992296	27.5 HP, 824 CC YAMAHA <sup>®</sup> MX825V	60 IN.
992272	29 HP, 824 CC KOHLER <sup>®</sup> EFI ECV860	60 IN.
992281	29 HP, 824 CC YAMAHA <sup>®</sup> EFI MX775V	60 IN.
992270	31 HP, 999 CC KAWASAKI <sup>®</sup> FX921V	72 IN.



# PRO-TURN<sup>®</sup> MACH ONE



## OVERGROWN GRASS, YOU'VE MET YOUR MATCH.


Weather cutting maintained or overgrown properties, stalky grasses and wet conditions are no match for the Mach One. The tunnel deck directs clippings away from the blades, keeping them from getting bogged down.

**- LIMITED -  
COMMERCIAL**  
**5 YEAR**  
OR 1200 HOUR  
WARRANTY

NO HOUR LIMIT  
FIRST TWO YEARS

LIMITED LIFETIME  
DECK SHELL & FRAME

See your professional  
Gravely<sup>®</sup> dealer for complete  
warranty details.

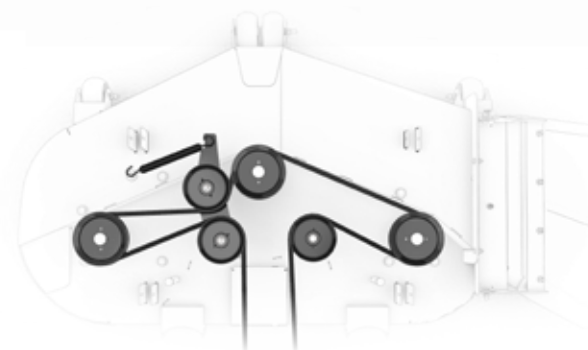

### CBT SYSTEM

Our exclusive Constant Belt Tension System (CBT) ensures belt tension is maintained, keeping the blade tip speed and cutting results consistent.



### HIGH-VOLUME OUTPUT DECK

The HVO deck provides increased depth from trim side to discharge side to process greater material volume.

MODEL NUMBER	ENGINE	DECK SIZE
992297	31 HP, 999 CC KAWASAKI <sup>®</sup> FX921V	60 IN.

# HIGH-VOLUME OUTPUT DECK

The HVO Deck on the Pro-Turn® Mach One utilizes the most advanced cutting chamber aerodynamics to push through the most precarious turf.



## PRECISION CUTTING

With blades set back 4 inches from the front of the deck, grass has time to recover before being cut with precision.

## ADVANCED CUTTING CHAMBER

Incorporates a blade overlap of 1.5 inches and is set back 4 inches from the front of the deck for less clumping and even grass dispersion.



## EFFICIENT

The open design and airflow of the tunnel deck eliminates deck packing and directs clippings away from the cutting edge. This prevents the blades from getting bogged down and expending available horsepower, so they're free to do what they do best. Cut grass.

## EVEN GRASS DISPERSION

The tunnel has a height of 5.5 inches on the trim side and increases to 7.75 inches at the discharge end. This provides space for increased material volume produced by each blade as it moves from cutting chamber to chamber.





# PRO-TURN® 400



## PERFORMANCE WITHOUT APOLOGY.

The Pro-Turn® 400 delivers. With a stronger frame, smarter controls and a smoother ride, it out works, outperforms and outlasts the competition.

- LIMITED -  
COMMERCIAL  
**5 YEAR**  
OR 1800 HOUR  
WARRANTY

NO HOUR LIMIT  
FIRST TWO YEARS

LIMITED LIFETIME  
DECK SHELL & FRAME

See your professional  
Gravely® dealer for complete  
warranty details.

MODEL NUMBER	ENGINE	DECK SIZE
992273	27 HP, 852 CC KAWASAKI® FX850	52 IN.
992282	29 HP, 824 CC YAMAHA® EFI MXV775	52 IN.
992275	35 HP, 999 CC KAWASAKI® FX1000	60 IN.
992278	33 HP, 824 CC KOHLER® EFI ECV880	60 IN.
992283	33 HP, 824 CC YAMAHA® EFI MXV825	60 IN.
992276	35 HP, 999 CC KAWASAKI® FX1000V	72 IN.
992284	33 HP, 824 CC YAMAHA® EFI MXV825	72 IN.



### AIR-RIDE SUSPENSION SEAT

The industry's first air-ride suspension system is enhanced with seat isolators to absorb large vertical impacts and designed with an oversized, pillow-top, extra high-back seat for all-day comfort.



### EZ-LIFT DECK SYSTEM

The EZ-Lift Deck System takes 25% less effort to raise and lower the deck. Also includes 19 cutting positions with .25-inch increments.



### RADIAL TIRES

Radial rear tires come standard, delivering automotive-style performance, handling and hill holding, while being gentler to the turf.



# STAND-ONS & WALK-BEHINDS

## PRO-STANCE



## PRO-WALK GEAR



## PRO-WALK HYDRO



	PRO-STANCE	PRO-WALK GEAR	PRO-WALK HYDRO
<b>ENGINE</b>	KAWASAKI® FS KAWASAKI® FT - EFI KAWASAKI® FX	KAWASAKI® FS	KAWASAKI® FS
<b>AIR FILTRATION</b>	STANDARD VORTICAL AIR FILTRATION HEAVY DUTY AIR CLEANER	STANDARD	STANDARD
<b>HORSEPOWER</b>	18.5 - 26 HP	14.5 HP	14.5 - 23 HP
<b>DISPLACEMENT</b>	603 - 726 CC	603 CC	603 - 726 CC
<b>DRIVE SYSTEM</b>	HYDRO-GEAR® ZT-3100 TRANSAXLES HYDRO-GEAR® ZT-3400 TRANSAXLES	PEERLESS DRIVE SYSTEM	HYDRO-GEAR® ZT-2800 TRANSAXLES
<b>FUEL CAPACITY</b>	6 - 9 GAL.	5.8 GAL.	5.5 GAL.
<b>GROUND SPEED</b>	8 MPH / 3 MPH 9 MPH / 4 MPH	5.4 MPH / REVERSE ASSIST	8 MPH / 3 MPH
<b>DECK</b>			
<b>DECK MATERIAL</b>	7 GA. STEEL	7 GA. STEEL	10 GA. STEEL
<b>CUTTING WIDTH</b>	32 IN., 36 IN., 48 IN., 52 IN., 60 IN.	32 IN., 36 IN., 48 IN.	36 IN., 48 IN., 52 IN., 60 IN.
<b>CUTTING HEIGHTS</b>	1.5 IN. - 5 IN.	1.5 IN. - 4.5 IN.	1.5 IN. - 4.5 IN. 1.5 IN. - 5 IN.
<b>WHEELS</b>			
<b>FRONT</b>	11 X 4-5 SEMI-PNEUMATIC 13 X 6.5-6 SEMI-PNEUMATIC	9 X 3.5-4 SEMI-PNEUMATIC	11 X 4-5
<b>REAR</b>	18 X 6.5-8 18 X 8.5-8 20 X 10.5-8 RADIAL	13 X 5-6 13 X 6.5-6	20 X 8-10 21 X 7-10
<b>WARRANTY</b>			
<b>UNIT</b>	5 YEAR / 1000 HOUR LIMITED COMMERCIAL / NO HOUR LIMIT FIRST 2 YEARS	2 YEAR LIMITED COMMERCIAL	4 YEAR / 750 HOUR LIMITED COMMERCIAL / NO HOUR LIMIT FIRST 2 YEARS
<b>DECK SHELL &amp; FRAME</b>	LIMITED LIFETIME	LIMITED LIFETIME	N/A





# PRO-STANCE®

## THINNER FOOTPRINT. FATTER WALLET.

We re-engineered the Pro-Stance® for maneuverability and versatility so you can take on hills with confidence. With redistributed weight and lowered center of gravity, the Pro-Stance offers adaptability with a range of deck sizes. So whether you're mowing a corporate campus or gated backyards, the redesigned Pro-Stance maximizes your investment.



NO HOUR LIMIT FIRST TWO YEARS  
LIMITED LIFETIME DECK SHELL & FRAME

See your professional Gravelly® dealer for complete warranty details.



### ADJUSTABLE CRUISE BAR

Allows the operator to limit and expand the unit's maximum speed in tight working environments.



### 32 IN. DECK

The advantage of a stand-on mower enters smaller yards with a 32-inch deck.



### HEIGHT-OF-CUT SYSTEM

Less deck-lifting force, a thumb-release and vertical-pin system add ease to cutting height adjustments.

MODEL NUMBER	ENGINE	DECK SIZE
994157	18.5 HP, 603 CC KAWASAKI® FS600V	32 IN.
994149	18.5 HP, 603 CC KAWASAKI® FS600V	36 IN.
994150	23.5 HP, 726 CC KAWASAKI® FX730V	48 IN.
994151	23.5 HP, 726 CC KAWASAKI® FX730V	52 IN.
994152	26 HP, 726 CC KAWASAKI® FT730V EFI	52 IN.
994153	23.5 HP, 726 CC KAWASAKI® FX730V	60 IN.
994154	26 HP, 726 CC KAWASAKI® FT730V EFI	60 IN.

# PRO-WALK® GEAR



# PRO-WALK® HYDRO

## HANDS-ON PERFORMANCE.

Pro-Walk® commercial lawn mowers are built for minimal maintenance and maximum performance.



LIMITED LIFETIME DECK SHELL & FRAME

See your professional Gravely® dealer for complete warranty details.

MODEL NUMBER	ENGINE	DECK SIZE
988150	14.5 HP, 603 CC KAWASAKI® FS481V	32 IN.
988151	14.5 HP, 603 CC KAWASAKI® FS481V	36 IN.
988152	14.5 HP, 603 CC KAWASAKI® FS481V	48 IN.

## PUT A LITTLE SWAGGER IN YOUR STEP.

The Pro-Walk Hydro was updated with the user in mind. A more ergonomic design combined with the stability you trust for precise, comfortable control.



NO HOUR LIMIT  
FIRST TWO YEARS

See your professional Gravely® dealer for complete warranty details.

MODEL NUMBER	ENGINE	DECK SIZE
988184	14.5 HP, 603 CC KAWASAKI® FS481V	36 IN.
988185	18.5 HP, 603 CC KAWASAKI® FS600V	48 IN.
988186	18.5 HP, 603 CC KAWASAKI® FS600V	52 IN.
988187	23 HP, 726 CC KAWASAKI® FS691V	60 IN.



### HEIGHT OF CUT

A single-point height-of-cut allows you to control your cutting performance in .25-inch increments.



### INTUITIVE STEERING

Intuitive steering shortens the learning curve and provides precise handling while ergonomic controls position the operator in a neutral position to reduce fatigue.



### WIDE WHEEL BASE

Cut with confidence and control with a wide wheel base that provides superior hillside stability.



# PRO-QXT<sup>®</sup>

- LIMITED -  
COMMERCIAL  
**4 YEAR**  
OR 500 HOUR  
WARRANTY

NO HOUR LIMIT  
FIRST TWO YEARS

WARRANTY FOR  
TRACTOR ONLY

See your professional  
Gravelly<sup>®</sup> dealer for complete  
warranty details.



## A WALK-BEHIND THAT RUNS CIRCLES AROUND COMPETITORS.

More than a tractor, this two-wheeled motivator gives you the edge through every season. The quick-attach system allows operators to move from brush mower or blade to snow blower or power brush with ease.



MODEL NUMBER	DESCRIPTION
985911	PRO-QXT <sup>®</sup> TRACTOR, 14 HP KOHLER <sup>®</sup> ENGINE
885910	48 IN. BLADE
885911	44 IN. BRUSH
885912	32 IN. SNOW BLOWER
885913	32 IN. BRUSH MOWER
885914, 885915	36 IN. & 48 IN. FINISH MOWER
885916	32 IN. AERATOR
885917	32 IN. DETHATCHER



### RAPID<sup>™</sup> CONTROL SYSTEM

Variable speed control allows operators to quickly change direction. The combination of the Rapid Control System and intuitive power steering results in smooth and easy operation.



### QUICK-ATTACH SYSTEM

The Pro-QXT<sup>®</sup> Tractor provides quick, single-person attachment changes with minimal effort, allowing the operator to easily transition between attachments.



### HYDROSTATIC DRIVE

Intuitive power steering provides effortless operation in all applications, increasing efficiency and productivity.

# JOB SITE

# VEHICLES

## ATLAS JSV 3200

## ATLAS JSV 3400SD

## ATLAS JSV 3400

## ATLAS JSV 6400



MODEL NUMBER	996206	996204	996205	996207
ENGINE	POLARIS® 2-CYLINDER, DOHC, GAS	POLARIS® 2-CYLINDER, DOHC, GAS	POLARIS® 2-CYLINDER, DOHC, GAS	POLARIS® 2-CYLINDER, DOHC, GAS
HORSEPOWER	40 HP	40 HP	40 HP	40 HP
DISPLACEMENT	999 CC	999 CC	999 CC	999 CC
FUEL SYSTEM	EFI	EFI	EFI	EFI
FUEL CAPACITY	11.5 GAL.	11.5 GAL.	11.5 GAL.	11.5 GAL.
GROUND SPEED	35 MPH	35 MPH	35 MPH	35 MPH
TOWING CAPACITY	2,500 LBS.	2,500 LBS.	2,500 LBS.	2,500 LBS.
TOTAL RATED PAYLOAD	1,900 LBS.	1,850 LBS.	1,900 LBS.	2,075 LBS.
GROUND SPEED	CONTINUOUSLY VARIABLE (CVT)	CONTINUOUSLY VARIABLE (CVT)	CONTINUOUSLY VARIABLE (CVT)	CONTINUOUSLY VARIABLE (CVT)
<b>TIRES &amp; WHEELS</b>				
FRONT & REAR SUSPENSION	IFS DUAL A-ARM	IFS DUAL A-ARM	IFS DUAL A-ARM	IFS DUAL A-ARM
FRONT & REAR TIRES	26 X 10 HEAVY DUTY	26 X 10 HEAVY DUTY	26 X 10 HEAVY DUTY	26 X 10 HEAVY DUTY
FRONT & REAR WHEELS	12 X 6 STEEL	12 X 6 STEEL	12 X 6 STEEL	12 X 6 STEEL
<b>FEATURES</b>				
STEERING	RACK & PINION	ELECTRIC POWERED STEERING	RACK & PINION	ELECTRIC POWERED STEERING
BED LIFT	SHOCK ASSIST	STANDARD, ELECTRIC	STANDARD, ELECTRIC	STANDARD, ELECTRIC
BED MATERIAL	POLY	STEEL	POLY	POLY
HITCH	STANDARD, HEAVY DUTY	STANDARD, HEAVY DUTY	STANDARD, HEAVY DUTY	STANDARD, HEAVY DUTY
ROPS	ACCORDING TO ANSI/OPEI B71.9, OSHA 1928.53	ACCORDING TO ANSI/OPEI B71.9, OSHA 1928.53	ACCORDING TO ANSI/OPEI B71.9, OSHA 1928.53	ACCORDING TO ANSI/OPEI B71.9, OSHA 1928.53
<b>VEHICLE DIMENSIONS</b>				
WEIGHT	1,475 LBS.	1,475 LBS.	1,475 LBS.	1,775 LBS.
LENGTH	122 IN.	122 IN.	122 IN.	155.5 IN.
WIDTH	63 IN.	63 IN.	63 IN.	63 IN.
HEIGHT	73 IN.	73 IN.	73 IN.	73 IN.
GROUND CLEARANCE	10.5 IN.	10.5 IN.	10.5 IN.	10.5 IN.
<b>WARRANTY</b>				
UNIT	1 YEAR LIMITED COMMERCIAL	1 YEAR LIMITED COMMERCIAL	1 YEAR LIMITED COMMERCIAL	1 YEAR LIMITED COMMERCIAL

# ATLAS JSV<sup>®</sup>



## BORN TO WORK.

How do you make the toughest job site vehicle even tougher? Give it an upgraded powertrain, larger engine and more towing capacity, for starters. Then install a more rigid frame and improved suspension for strength in any environment. Haul more. Tow more. Do more.



### POWERTRAIN STRENGTH

A two-cylinder, 1000cc, OHC engine, stronger clutch and smoother drivetrain tackle demanding jobsite conditions.



### CHASSIS AND SUSPENSION

A one-piece chassis and independent rear suspension offers rigidity in the toughest work environments.



### ALL-STEEL JOB BOX

The Atlas JSV 3400SD's fabricated all-steel cargo bed won't buckle or bend. Dump cargo with the touch of a button and haul a fully loaded pallet, thanks to a generous 18 cubic feet of cargo space.

MODEL NUMBER	UNIT	DESCRIPTION
996206	3200	POLY BED, THREE-SEAT, TWO WHEEL DRIVE, JOB SITE VEHICLE
996204	3400SD	STEEL BED, THREE-SEAT, FOUR-WHEEL DRIVE, JOB SITE VEHICLE
996205	3400	POLY BED, THREE-SEAT, FOUR-WHEEL DRIVE, JOB SITE VEHICLE
996207	6400	POLY BED, SIX-SEAT, FOUR-WHEEL DRIVE, JOB SITE VEHICLE

# ATLAS JSV ATTACHMENTS & ACCESSORIES

## FIXED GLASS WINDSHIELD

796043

## FRONT CRANK DOORS

796208

## 72 IN. STEEL BLADE

796070, 796223, 796227

## NERF BARS BASE

796217



## THE RIGHT TOOL FOR ANY JOB.

Whether you're moving snow, transporting landscaping equipment or hauling debris, customize your Atlas JSV to suit your needs with attachments and accessories for every jobsite.

## REARVIEW MIRROR

796216

## POLY SPORT ROOF, BASE

796097

## BEACON LIGHT KIT


796214

## HEADACHE ROCK POLY BOX

796097

## GLASS REAR PANEL

796031

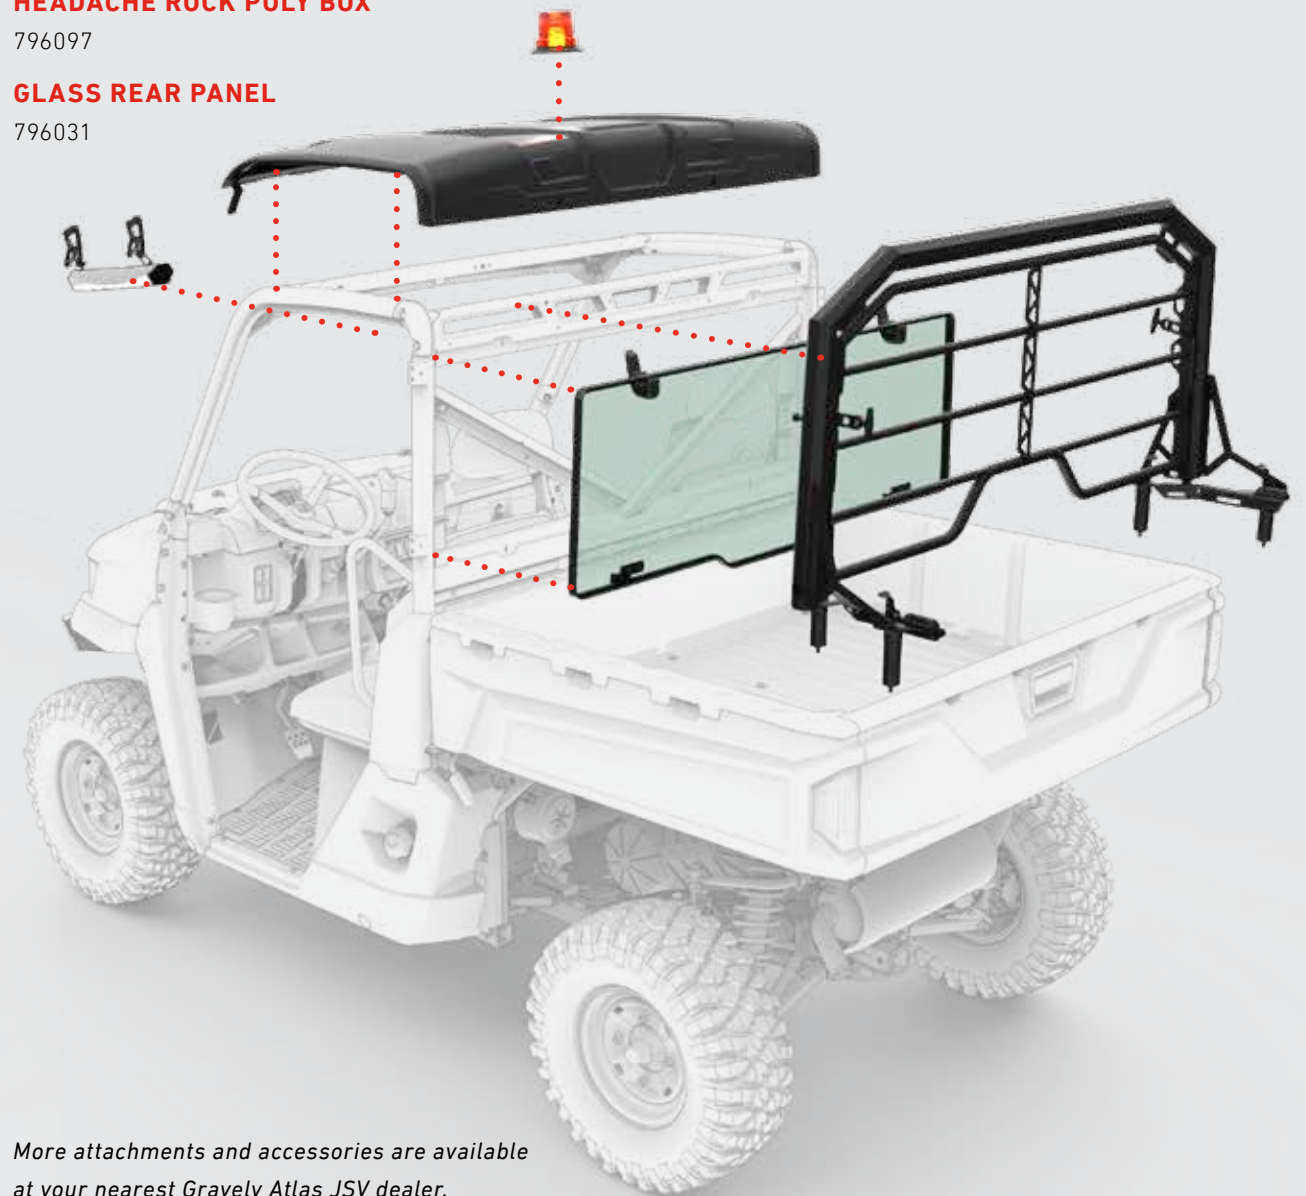

*More attachments and accessories are available at your nearest Gravelly Atlas JSV dealer.*



# RESIDENTIAL ZERO-TURNS

ZT  
**X**



ZT  
**XL**



ZT  
**HD**



**ENGINE**

KOHLER® 7000  
KAWASAKI® FR

KOHLER® 7000 W/ SMART CHOKE™  
KAWASAKI® FR

KOHLER® 7000 W/ SMART CHOKE™  
KAWASAKI® FR

HORSEPOWER	22 - 24 HP	21.5 - 26 HP	21.5 - 26 HP
DISPLACEMENT	725 - 726 CC	725 - 726 CC	725 - 747 CC
DRIVE SYSTEM	HYDRO-GEAR® EZT TRANSAXLES	HYDRO-GEAR® ZT-2800 TRANSAXLES	HYDRO-GEAR® ZT-3100 TRANSAXLES
FUEL CAPACITY	2.8 GAL.	2.8 GAL.	5.0 GAL.
GROUND SPEED	7 MPH / 3 MPH	7.5 MPH / 3 MPH	8 MPH / 4 MPH
<b>DECK</b>			
DECK MATERIAL	11 GA. STEEL	11 GA. STEEL	10 GA. STEEL
CUTTING WIDTH	42 IN., 52 IN., 60 IN.	42 IN., 48 IN., 52 IN., 60 IN.	44 IN., 48 IN., 52 IN., 60 IN.
CUTTING HEIGHTS	1.5 IN. - 4.5 IN.	1.5 IN. - 4.5 IN.	1.5 IN. - 5 IN.
<b>WHEELS</b>			
FRONT	11 X 6-5	11 - 6-5	13 X 6.5-6
REAR	20 X 8-8 20 X 10-8	20 X 8-10 20 X 10-10 20 X 12-10	22 X 10-12 22 X 10.5-12 22 X 12-12
<b>FEATURES</b>			
SEAT	18 IN. PLUSH HIGH BACK SEAT W/ SEAT SPRINGS & ARM RESTS	18 IN. PLUSH HIGH BACK SEAT W/ PADDED ARM RESTS, SEAT ISOLATION	20 IN. HIGH BACK SEAT, LEVER ADJUSTED, PADDED ARM RESTS
<b>WARRANTY</b>			
UNIT	3 YEAR / 300 HOUR	4 YEARS / 400 HOURS	4 YEAR / 500 HOURS




## BATTLE BACKYARD CHALLENGES LIKE A PRO.

Redesigned for comfort and style, the ZT X combines zero-turn efficiency with legendary Gravely performance. Mow with professional-level precision and control.



See your professional Gravely® dealer for complete warranty details.



### 11-GAUGE FABRICATED DECK

Our 4 1/2-inch-deep fabricated deck features an optimized airflow design to produce best-in-class cut quality and discharge performance.



### CUT SELECTION

We cut out the pins and levers to offer a simple and intuitive cutting selection solution. Press the pedal to raise the deck and turn the dial to select your cutting height.



### POWER

Kawasaki® engines provide professional-grade power, durability and dependability. The Kohler® 7000 Series™ engines are ready to run as soon as you turn the key.

MODEL NUMBER	ENGINE	DECK SIZE
915255	22 HP, 725 CC KOHLER® 7000 PRO	42 IN.
915256	24 HP, 725 CC KOHLER® 7000 PRO	52 IN.
915257	23 HP, 726 CC KAWASAKI® FR691	52 IN.
915274	23 HP, 726 CC KAWASAKI® FR691	60 IN.





# ZT XL



## MOW WITH AUTHORITY.

Built for big jobs, the ZT XL has been redesigned with vibration isolators and a high-back seat to combine professional cut quality with all-day comfort. Out-manuever any obstacle with more deck sizes to meet your demands.



See your professional Gravely® dealer for complete warranty details.

MODEL NUMBER	ENGINE	DECK SIZE
915259	24 HP, 725 CC KOHLER® 7000 W/ SMART CHOKE™	42 IN.
915262	21.5 HP, 726 CC KAWASAKI® FR651	42 IN.
915261	23 HP, 726 CC KAWASAKI® FR691	48 IN.
915258	25 HP, 725 CC KOHLER® 7000 W/ SMART CHOKE™	52 IN.
915263	23 HP, 726 CC KAWASAKI® FR691	52 IN.
915260	26 HP, 725 CC KOHLER® 7000 W/ SMART CHOKE™	60 IN.
915264	24 HP, 726 CC KAWASAKI® FR730	60 IN.



### HYDRO-GEAR® TRANSMISSION

The Hydro-Gear® ZT-2800 transmission provides increased torque, a smoother ride and longer life.



### HANDLING

Roll right by the competition with 20-inch drive tires and 11 x 6-inch front caster wheels designed to provide better traction, control and handling.



### SEATING COMFORT

This plush high-back seat with seat isolation along with cut and sewn armrests ensures upgraded comfort for longer mowing sessions.



## ERASE ANY DOUBT.

The ZT HD from Gravely elevates expectations of style, comfort, speed and precision. Built to commercial standards for power and durability, the only thing that makes this a residential mower is that it lives at your house.



See your professional Gravely® dealer for complete warranty details.



### CUT SELECTION

Effortlessly push the deck lift pedal forward, insert the pin into your desired cutting height and release the pedal.



### HIGH-BACK SEAT

A plush, high-back seat with armrests ensures upgraded comfort for longer mowing sessions.



### FULLY WELDED TUBULAR FRAME

Unlike the competitive c-channel frames, this fully-welded, steel tubular frame provides superior rigidity and strength.

MODEL NUMBER	ENGINE	DECK SIZE
991160	21.5 HP, 726 CC KAWASAKI® FR651	44 IN.
991162	23 HP, 726 CC KAWASAKI® FR691	48 IN.
991152	25 HP, 725 CC KOHLER® 7000 W/ SMART CHOKE™	48 IN.
991164	23 HP, 726 CC KAWASAKI® FR691	52 IN.
991154	25 HP, 725 CC KOHLER® 7000 W/ SMART CHOKE™	52 IN.
991156	26 HP, 725 CC KOHLER® 7000 W/ SMART CHOKE™	60 IN.
991166	24 HP, 726 CC KAWASAKI® FR730	60 IN.

# SWEAT THE DETAILS

Get that much more out of your day with additional tools and accessories straight from the factory. Meticulously engineered to fit seamlessly with your machine, these accessories shave time off your schedule and help lighten the load. **When it's your mower, there are no little things.**



## Bagger Systems

Gravely's mesh bags provide superior airflow and venting.

### 2 and 3 bucket options

(see individual models for bagger options available)

## Mulch Kit

Separate cutting chambers for each blade to produce smaller clippings for a professionally manicured appearance.




## Sunshade

Cut all day in comfort while staying cool and protected from the sun.

## Powered Deck Lift

The powered deck lift kit makes cutting height adjustments smooth and simple. (Pro-Turn 400 only)



## Hitch Kit

Add a hitch kit to enjoy unmatched versatility with a variety of tow-behind options.

## Light Kit

The LED headlight kit will light your way and keep you cutting long after others call it a day.



# COMPACT-PRO<sup>®</sup> PRO-TURN<sup>®</sup> Z

	34	44
<b>MODEL NUMBER</b>	991144	991145
ENGINE	KAWASAKI <sup>®</sup> 481V FX, HEAVY DUTY AIR CLEANER	KAWASAKI <sup>®</sup> 600V FX
HORSEPOWER	15.5 HP	19 HP
DISPLACEMENT	603 CC	
DRIVE SYSTEM	HYDRO-GEAR <sup>®</sup> ZT-3100 TRANSAXLE	
FUEL CAPACITY	7.2 GAL.	
GROUND SPEED <i>(APPROX. Mph) (Forward/Reverse)</i>	7 MPH / 3 MPH	
STARTER	ELECTRIC	
<b>DECK</b>		
DECK MATERIAL	10 GA. STEEL WITH 10 GA. SPINDLE REINFORCEMENT	
DECK CONSTRUCTION	FABRICATED	
NUMBER OF SPINDLES	2	3
BLADE TIP SPEED <i>(FPM)</i>	17,270	
SPINDLE HOUSING MATERIAL	FORGED ALUMINUM	
SPINDLE BEARINGS	BALL BEARING	
DECK ENGAGEMENT	ELECTRIC OGURA <sup>®</sup> GT1.5	
DECK LIFT SYSTEM	FOOT OPERATED	
CUTTING WIDTH	34 IN.	44 IN.
CUTTING HEIGHT	1.0 IN. - 5.0 IN.	
CUTTING POSITIONS	17	
<b>WHEELS</b>		
FRONT AXLE	FIXED	
FRONT	SMOOTH 13 X 5-6	
REAR	21 X 7-10 TURF	20.5 X 8-10 TURF
<b>FEATURES</b>		
SEAT	HIGH BACK WITH EVC SUSPENSION	
FOLDABLE ROPS	OPTIONAL	
<b>MACHINE</b>		
WEIGHT	737 LBS.	789 LBS.
LENGTH	75 IN.	
WIDTH <i>(W/O CHUTE)</i>	35.9 IN.	46.7 IN.
WIDTH <i>(W CHUTE)</i>	48.3 IN.	56.9 IN.
HEIGHT	45.3 IN.	
<b>WARRANTY</b>		
UNIT	4 YEAR / 750 HOUR COMMERCIAL / NO HOUR LIMIT FIRST 2 YEARS	
DECK SHELL & FRAME	N/A	
<b>ATTACHMENTS &amp; ACCESSORIES</b>		
MULCHING KIT, DISCHARGE COVER KIT, HUB CAP KIT, FLEXTEND SHOULDER SUPPORT KIT, SOLID TIRE KIT, TRUE POWER TIRE KIT, TRAILER HITCH KIT, HEADLIGHT KIT, STRIPING KIT, PLUSH ARMREST KIT, SUNSHADE KIT, POWERED BAGGER KIT		

	48	52	60
<b>MODEL NUMBER</b>	991192	991194	991196
ENGINE	GRAVELY		
HORSEPOWER	26.5 HP		
DISPLACEMENT	764 CC		
DRIVE SYSTEM	HYDRO-GEAR <sup>®</sup> ZT-3100 TRANSAXLES		
FUEL CAPACITY	5.0 GAL.		
GROUND SPEED <i>(APPROX. Mph) (Forward/Reverse)</i>	8 MPH / 4 MPH		
<b>DECK</b>			
DECK MATERIAL	10 GA. STEEL W/ 10 GA. SPINDLE REINFORCEMENT		
DECK CONSTRUCTION	FABRICATED		
NUMBER OF SPINDLES	3		
BLADE TIP SPEED <i>(FPM)</i>	18,000		
SPINDLE HOUSING MATERIAL	FORGED ALUMINUM		
SPINDLE BEARINGS	BALL BEARING		
DECK ENGAGEMENT	ELECTRIC OGURA <sup>®</sup>		
CUTTING WIDTH	48 IN.	52 IN.	60 IN.
CUTTING HEIGHTS	1.5 IN. - 5.0 IN.		
CUTTING POSITIONS	15		
<b>WHEELS</b>			
FRONT AXLE	FIXED		
FRONT	SMOOTH 13 X 6.50-6		
REAR	TURF 22 X 10-12	TURF 22 X 10.5-12	TURF 22 X 12-12
<b>FEATURES</b>			
SAFETY	ANSI CERTIFIED		
SEAT	SEAT 20 IN. HIGH BACK COMFORT W/INTEGRATED ISOLATION		
FOLDABLE ROPS	STANDARD		
<b>MACHINE</b>			
WEIGHT	923 LBS.	932 LBS.	953 LBS.
LENGTH	79 IN.		
WIDTH <i>(W/CHUTE UP/DOWN)</i>	51 IN. / 63 IN.	55 IN. / 67 IN.	63 IN. / 75 IN.
HEIGHT <i>(W/ ROPS EXT/DOWN)</i>	72 IN. / 52 IN.		
<b>WARRANTY</b>			
UNIT	4 YEAR COMMERCIAL / 750 HOUR LIMITED		
<b>ATTACHMENTS &amp; ACCESSORIES</b>			
MULCHING KIT, DISCHARGE COVER KIT, TRAILER HITCH KIT, HEADLIGHT KIT, STRIPING KIT, SUN SHADE KIT, POWERED BAGGER KIT, OPERATOR CONTROLLED DISCHARGE CHUTE			

# PRO-TURN<sup>®</sup> ZX

	48	52	60
<b>MODEL NUMBER</b>	991230	991232	991234
ENGINE	KAWASAKI <sup>®</sup> FX691V AIR-COOLED, VERTICAL TWIN	KAWASAKI <sup>®</sup> FX691V AIR-COOLED, VERTICAL TWIN	KAWASAKI <sup>®</sup> FX730V AIR-COOLED, VERTICAL TWIN
HORSEPOWER	22 HP	22 HP	23.5 HP
DISPLACEMENT	726 CC	726 CC	726 CC
DRIVE SYSTEM	HYDRO-GEAR <sup>®</sup> ZT-3200 TRANSAXLES		
FUEL CAPACITY	5.0 GAL.		
GROUND SPEED <i>(APPROX. Mph) (Forward/Reverse)</i>	8.5 MPH / 4 MPH		
<b>DECK</b>			
DECK MATERIAL	10 GA. STEEL W/ 10 GA. SPINDLE REINFORCEMENT		
DECK CONSTRUCTION	FABRICATED		
NUMBER OF SPINDLES	3		
BLADE TIP SPEED <i>(FPM)</i>	18,000		
SPINDLE HOUSING MATERIAL	FORGED ALUMINUM		
SPINDLE BEARINGS	BALL BEARING		
DECK ENGAGEMENT	ELECTRIC OGURA <sup>®</sup> GT1.5		
CUTTING WIDTH	48 IN.	52 IN.	60 IN.
CUTTING HEIGHTS	1.5 IN. - 5.0 IN.		
CUTTING POSITIONS	15		
<b>WHEELS</b>			
FRONT AXLE	FIXED		
FRONT	SMOOTH 13 X 6.50-6		
REAR	TURF 22 X 10-12	TURF 22 X 10.5-12	TURF 22 X 12-12
<b>FEATURES</b>			
SEAT	20 IN. HIGH BACK COMFORT W/ INTEGRATED ISOLATION		
FOLDABLE ROPS	STANDARD		
<b>MACHINE</b>			
WEIGHT	924 LBS.	932 LBS.	953 LBS.
LENGTH	79 IN.		
WIDTH <i>(W/O CHUTE)</i>	51 IN.	55 IN.	63 IN.
WIDTH	63 IN.	67 IN.	75 IN.
HEIGHT <i>(W/ ROPS EXT/DOWN)</i>	72 IN. / 49 IN.		
<b>WARRANTY</b>			
UNIT	4 YEAR COMMERCIAL / 750 HOUR LIMITED		
<b>ATTACHMENTS &amp; ACCESSORIES</b>			
2 BUCKET POWERED BAGGER, MULCHING KIT, DISCHARGE COVER KIT, TRAILER HITCH KIT, HEADLIGHT KIT, SUN SHADE KIT, SUSPENSION SEAT KIT, OPERATOR CONTROLLED DISCHARGE CHUTE			

# PRO-TURN® 100

	148	152	152	152	160	160	160	160
<b>MODEL NUMBER</b>	<b>991128</b>	<b>991129</b>	<b>991132</b>	<b>991135</b>	<b>991130</b>	<b>991133</b>	<b>991136</b>	<b>991140</b>
<b>ENGINE</b>	KAWASAKI® FX691V AIR-COOLED, HEAVY-DUTY AIR CLEANER	KAWASAKI® FX691V AIR-COOLED, HEAVY-DUTY AIR CLEANER	KOHLER® ZT730 AIR-COOLED, HEAVY-DUTY AIR CLEANER	KOHLER® ZT725 EFI AIR-COOLED, HEAVY-DUTY AIR CLEANER	KAWASAKI® FX730V AIR-COOLED, HEAVY-DUTY AIR CLEANER	KOHLER® ZT740 AIR-COOLED, HEAVY-DUTY AIR CLEANER	KOHLER® ZT740 EFI AIR-COOLED, HEAVY-DUTY AIR CLEANER	YAMAHA® MX800V AIR-COOLED, HEAVY-DUTY AIR CLEANER
<b>HORSEPOWER</b>	22 HP	22 HP	23 HP	22 HP	23.5 HP	25 HP	25 HP	26 HP
<b>DISPLACEMENT (CC)</b>	726 CC	726 CC	747 CC	725 CC	726 CC	747 CC	747 CC	824 CC
<b>DRIVE SYSTEM</b>	HYDRO-GEAR® ZT-3400 TRANSAXLES							
<b>FUEL CAPACITY – Gallons (Liters)</b>	10 GAL.							
<b>GROUND SPEED (APPROX. Mph) (Forward/Reverse)</b>	10 MPH / 5 MPH							
<b>DECK</b>								
<b>DECK MATERIAL</b>	7 GA. STEEL W/ 1/4 IN. SPINDLE REINFORCEMENT							
<b>DECK CONSTRUCTION</b>	FABRICATED							
<b>NUMBER OF SPINDLES</b>	3							
<b>BLADE TIP SPEED (FPM)</b>	18,000							
<b>SPINDLE HOUSING MATERIAL</b>	FORGED ALUMINUM							
<b>SPINDLE BEARINGS</b>	BALL BEARING							
<b>DECK ENGAGEMENT</b>	OGURA® GT2.75 ELECTRIC CLUTCH							
<b>CUTTING WIDTH</b>	48 IN.	52 IN.	52 IN.	52 IN.	60 IN.	60 IN.	60 IN.	60 IN.
<b>CUTTING HEIGHTS</b>	1.5 IN. - 5.5 IN.							
<b>CUTTING POSITIONS</b>	17							
<b>WHEELS</b>								
<b>FRONT AXLE</b>	FIXED, GREASEABLE CASTER FORK TUBES							
<b>FRONT</b>	SMOOTH 13 X 6.50-6							
<b>REAR</b>	TURF 23 X 10.50-12							
<b>FEATURES</b>								
<b>SEAT</b>	HIGH BACK W/ FULL SUSPENSION							
<b>FOLDABLE ROPS</b>	STANDARD							
<b>MACHINE</b>								
<b>WEIGHT</b>	1062 LBS.	1079 LBS.	1068 LBS.	1073 LBS.	1121 LBS.	1110 LBS.	1115 LBS.	1136 LBS.
<b>LENGTH</b>	78.5 IN.							
<b>WIDTH (W/O CHUTE)</b>	50 IN.	55.5 IN.			63 IN.			
<b>WIDTH (W/ CHUTE)</b>	62 IN.	67.5 IN.			75 IN.			
<b>HEIGHT (W/ ROPS EXT/DOWN)</b>	71 IN. / 48 IN.							
<b>WARRANTY</b>								
<b>UNIT</b>	5 YEAR / 1000 HOUR COMMERCIAL / NO HOUR LIMIT FIRST 2 YEARS							
<b>DECK SHELL &amp; FRAME</b>	LIMITED LIFETIME							
<b>ATTACHMENTS &amp; ACCESSORIES</b>								
MULCHING KIT, DISCHARGE COVER KIT, HUB CAP KIT, SOLID TIRE KIT, TRUE POWER TIRE KIT, TRAILER HITCH KIT, HEADLIGHT KIT, STRIPING KIT, SUNSHADE KIT, 2 BUCKET POWERED BAGGER KIT (8 BU.)								

# PRO-TURN® 200

	252	260	260	260	260	260	272
<b>MODEL NUMBER</b>	<b>992268</b>	<b>992267</b>	<b>992269</b>	<b>992272</b>	<b>992281</b>	<b>992296</b>	<b>992270</b>
<b>ENGINE</b>	KAWASAKI® FX850V AIR-COOLED HEAVY-DUTY AIR CLEANER	KOHLER® ZT740 AIR-COOLED HEAVY-DUTY AIR CLEANER	KAWASAKI® FX850V AIR-COOLED HEAVY-DUTY AIR CLEANER	KOHLER® EFI ECV860 AIR-COOLED HEAVY-DUTY AIR CLEANER	YAMAHA® EFI MXV775 AIR-COOLED HEAVY-DUTY AIR CLEANER	YAMAHA® MX825V AIR-COOLED HEAVY-DUTY AIR CLEANER	KAWASAKI® FX921V AIR-COOLED HEAVY-DUTY AIR CLEANER
<b>HORSEPOWER</b>	27 HP	25 HP	27 HP	29 HP	29 HP	27.5 HP	31 HP
<b>DISPLACEMENT</b>	852 CC	747 CC	852 CC	824 CC	824 CC	824 CC	999 CC
<b>DRIVE SYSTEM</b>	HYDRO-GEAR® ZT-5400 TRANSAXLES						
<b>FUEL CAPACITY</b>	13.4 GAL.						
<b>GROUND SPEED (APPROX. Mph) (Forward/Reverse)</b>	13 MPH / 6 MPH						
<b>DECK</b>							
<b>DECK MATERIAL</b>	7 GA. STEEL WITH .25 IN. SPINDLE REINFORCEMENT						
<b>DECK CONSTRUCTION</b>	FABRICATED						
<b>NUMBER OF SPINDLES</b>	3						
<b>BLADE TIP SPEED (FPM)</b>	18,000						
<b>SPINDLE HOUSING MATERIAL</b>	FORGED ALUMINUM						
<b>SPINDLE BEARINGS</b>	BALL BEARING						
<b>DECK ENGAGEMENT</b>	OGURA® GT3.5 ELECTRIC CLUTCH						
<b>CUTTING WIDTH</b>	52 IN.	60 IN.	60 IN.	60 IN.	60 IN.	60 IN.	72 IN.
<b>CUTTING HEIGHTS</b>	1.5 IN. - 5.5 IN.						
<b>CUTTING POSITIONS</b>	17						
<b>WHEELS</b>							
<b>FRONT AXLE</b>	FIXED, GREASEABLE CASTER FORK TUBES						
<b>FRONT</b>	SMOOTH 15 X 6-6						
<b>REAR</b>	TURF 23 X 10.5-12	TURF 24 X 12-12					
<b>FEATURES</b>							
<b>SEAT</b>	HIGH BACK W/ FULL SUSPENSION & PADDED ARMRESTS						
<b>FOLDABLE ROPS</b>	STANDARD						
<b>MACHINE</b>							
<b>WEIGHT (W/O FUEL)</b>	1302 LBS.	1322 LBS.	1336 LBS.	1332 LBS.	1355 LBS.	1355 LBS.	1410 LBS.
<b>LENGTH</b>	80 IN.	80 IN.	80 IN.	80 IN.	80 IN.	80 IN.	82 IN.
<b>WIDTH (W/O CHUTE)</b>	55.5 IN.	63 IN.	63 IN.	63 IN.	63 IN.	63 IN.	75 IN.
<b>WIDTH (W/ CHUTE)</b>	67.5 IN.	75 IN.	75 IN.	75 IN.	75 IN.	75 IN.	87 IN.
<b>HEIGHT (W/ ROPS EXT/DOWN)</b>	70 IN. / 47.75 IN.						
<b>WARRANTY</b>							
<b>UNIT</b>	5 YEAR / 1250 HOUR COMMERCIAL / NO HOUR LIMIT FIRST 2 YEARS						
<b>DECK SHELL &amp; FRAME</b>	LIMITED LIFETIME						
<b>ATTACHMENTS &amp; ACCESSORIES</b>							
3 BUCKET BAGGER (12 BU.), 12V OUTLET, SEAT ISOLATOR KIT, RADIAL DRIVE, TIRES, STRIPING KIT, OPERATOR-CONTROLLED DISCHARGE CHUTE, SEMI-PNEUMATIC FRONT TIRE KIT AND HEADLIGHT KIT							

# PRO-TURN® MACH ONE

60	
<b>MODEL NUMBER</b>	992297
<b>ENGINE</b>	KAWASAKI® FX921V
<b>HORSEPOWER</b>	31 HP
<b>DISPLACEMENT</b>	999 CC
<b>DRIVE SYSTEM</b>	HYDRO-GEAR® ZT-5400 TRANSAXLES
<b>FUEL CAPACITY</b>	13.4 GAL.
<b>GROUND SPEED</b> <i>(APPROX. Mph) (Forward/Reverse)</i>	13 MPH / 6 MPH
<b>DECK</b>	
<b>DECK MATERIAL</b>	7 GA. STEEL W/ .25 IN. SPINDLE REINFORCEMENT
<b>DECK CONSTRUCTION</b>	WELDED
<b>NUMBER OF SPINDLES</b>	3
<b>BLADE TIP SPEED (FPM)</b>	18,633
<b>SPINDLE HOUSING MATERIAL</b>	FORGED ALUMINUM
<b>SPINDLE BEARINGS</b>	BALL BEARING
<b>DECK ENGAGEMENT</b>	OGURA® GT3.5 ELECTRIC CLUTCH
<b>CUTTING WIDTH</b>	60 IN.
<b>CUTTING HEIGHTS</b>	1.5 IN. - 5.5 IN.
<b>CUTTING POSITIONS</b>	17
<b>WHEELS</b>	
<b>FRONT AXLE</b>	FIXED, GREASEABLE CASTER FORK TUBES
<b>FRONT</b>	SMOOTH 15 X 6-6 W/ GREASEABLE TAPERED ROLLER BEARINGS
<b>REAR</b>	TURF 24 X 12-12
<b>FEATURES</b>	
<b>SEAT</b>	HIGH BACK COMFORT W/ FULL SUSPENSION AND PADDED ARMRESTS
<b>FOLDABLE ROPS</b>	STANDARD
<b>MACHINE</b>	
<b>WEIGHT</b>	1375 LBS.
<b>LENGTH</b>	82IN.
<b>WIDTH (W/ CHUTE UP/DOWN)</b>	61 IN. / 73 IN.
<b>HEIGHT (W/ ROPS EXT/DOWN)</b>	70 IN. / 47.75 IN.
<b>GROUND CLEARANCE</b> <i>(UNDER REAR WHEELS)</i>	4.5 IN.
<b>WARRANTY</b>	
<b>UNIT</b>	5 YEAR / 1250 HOUR COMMERCIAL / NO HOUR LIMIT FIRST TWO YEARS
<b>DECK SHELL &amp; FRAME</b>	LIMITED LIFETIME
<b>ATTACHMENTS &amp; ACCESSORIES</b>	
TRAILER HITCH KIT, HEADLIGHT KIT, SUN SHADE KIT, SOLID FRONT CASTER TIRE KIT, HUB CAP SET	

# PRO-TURN® 400

452		452		460		460		460		472		472	
<b>MODEL NUMBER</b>	992273	992282	992275	992278	992283	992276	992284						
<b>ENGINE</b>	KAWASAKI® FX850 AIR-COOLED, HEAVY-DUTY AIR CLEANER	YAMAHA® EFI MXV775 AIR-COOLED, HEAVY-DUTY AIR CLEANER	KAWASAKI® FX1000V AIR-COOLED, HEAVY-DUTY AIR CLEANER	KOHLER® EFI ECV880 AIR-COOLED, HEAVY-DUTY AIR CLEANER	YAMAHA® EFI MXV825 AIR-COOLED, HEAVY-DUTY AIR CLEANER	KAWASAKI® FX1000V AIR-COOLED, HEAVY-DUTY AIR CLEANER	YAMAHA® EFI MXV825 AIR-COOLED, HEAVY-DUTY AIR CLEANER						
<b>HORSEPOWER</b>	27 HP	29 HP	35 HP	33 HP	33 HP	35 HP	33 HP						
<b>DISPLACEMENT</b>	852 CC	824 CC	999 CC	824 CC	824 CC	999 CC	824 CC						
<b>DRIVE SYSTEM</b>	HYDRO-GEAR® ZT-5400 TRANSAXLES												
<b>FUEL CAPACITY</b>	13.4 GAL.												
<b>GROUND SPEED</b> <i>(APPROX. Mph) (Forward/Reverse)</i>	13 MPH / 6 MPH												
<b>DECK</b>													
<b>DECK MATERIAL</b>	7 GA. STEEL WITH .25 IN. SPINDLE REINFORCEMENT												
<b>DECK CONSTRUCTION</b>	FABRICATED												
<b>NUMBER OF SPINDLES</b>	3												
<b>BLADE TIP SPEED (FPM)</b>	18,000												
<b>SPINDLE HOUSING MATERIAL</b>	FORGED ALUMINUM												
<b>SPINDLE BEARINGS</b>	BALL BEARING												
<b>DECK ENGAGEMENT</b>	OGURA® GT3.5 ELECTRIC CLUTCH												
<b>CUTTING WIDTH</b>	52 IN.	52 IN.	60 IN.	60 IN.	60 IN.	72 IN.	72 IN.						
<b>CUTTING HEIGHTS</b>	1.0 IN. - 5.5 IN.												
<b>CUTTING POSITIONS</b>	19												
<b>WHEELS</b>													
<b>FRONT AXLE</b>	FIXED, GREASEABLE CASTER FORK TUBES												
<b>FRONT</b>	SMOOTH 15 X 6-6 SEMI PNEUMATIC												
<b>REAR</b>	RADIAL TURF 23 X 10-12	RADIAL TURF 23 X 10-12	RADIAL TURF 24 X 12-12	RADIAL TURF 24 X 12-12	RADIAL TURF 24 X 12-12	RADIAL TURF 24 X 12-12	RADIAL TURF 24 X 12-12						
<b>FEATURES</b>													
<b>SEAT</b>	HIGH BACK W/ FULL AIR RIDE SUSPENSION AND SEAT ISOLATORS												
<b>FOLDABLE ROPS</b>	STANDARD												
<b>MACHINE</b>													
<b>WEIGHT</b>	1326 LBS.	1332 LBS.	1358 LBS.	1360 LBS.	1356 LBS.	1453 LBS.	1445 LBS.						
<b>LENGTH</b>	80 IN.												
<b>WIDTH (W/O CHUTE)</b>	55.5 IN.	55.5 IN.	63 IN.	63 IN.	63 IN.	75 IN.	75 IN.						
<b>WIDTH (W/ CHUTE)</b>	67.5 IN.	67.5 IN.	75 IN.	75 IN.	75 IN.	87 IN.	87 IN.						
<b>HEIGHT (W/ ROPS EXT/DOWN)</b>	70/47.75 IN.												
<b>WARRANTY</b>													
<b>UNIT</b>	5 YEAR / 1500 HOUR COMMERCIAL / NO HOUR LIMIT FIRST 2 YEARS												
<b>DECK SHELL &amp; FRAME</b>	LIMITED LIFETIME												
<b>ATTACHMENTS &amp; ACCESSORIES</b>													
MULCHING KIT, DISCHARGE COVER KIT, HUB CAP KIT, FLEXTEND SHOULDER SUPPORT KIT, TRUE POWER TIRE KIT, TRAILER HITCH KIT, HEADLIGHT KIT, STRIPING KIT, 3 BUCKET BAGGER (12BU.)													

# PRO-STANCE

	32FL	36FL	48FL	52FL	52FL	60FL	60FL
<b>MODEL NUMBER</b>	<b>994157</b>	<b>994149</b>	<b>994150</b>	<b>994151</b>	<b>994152</b>	<b>994153</b>	<b>994154</b>
<b>ENGINE</b>	KAWASAKI® FS 600 V-TWIN	KAWASAKI® FS 600 V-TWIN	KAWASAKI® FX 730 V-TWIN	KAWASAKI® FX 730 V-TWIN	KAWASAKI® FT EFI 730 V-TWIN	KAWASAKI® FX 730 V-TWIN	KAWASAKI® FT EFI 730 V-TWIN
<b>HORSEPOWER</b>	18.5 HP	18.5 HP	23.5 HP	23.5 HP	26 HP	23.5 HP	26 HP
<b>DISPLACEMENT</b>	603 CC	603 CC	726 CC	726 CC	726 CC	726 CC	726 CC
<b>DRIVE SYSTEM</b>	HYDRO-GEAR® ZT-3100 TRANSAXLE		HYDRO-GEAR® ZT-3400 TRANSAXLE				
<b>FUEL CAPACITY</b>	6 GAL.		9 GAL.				
<b>GROUND SPEED</b> <i>(APPROX. Mph) (Forward/Reverse)</i>	8 MPH / 3 MPH		9 MPH / 4 MPH				
<b>STARTER</b>	ELECTRIC						
<b>DECK</b>							
<b>DECK MATERIAL</b>	7 GA.						
<b>DECK CONSTRUCTION</b>	WELDED						
<b>NUMBER OF SPINDLES</b>	2		3				
<b>BLADE TIP SPEED (FPM)</b>	18,220		18,000				
<b>SPINDLE HOUSING MATERIAL</b>	FORGED ALUMINUM						
<b>SPINDLE BEARINGS</b>	BALL BEARING						
<b>DECK ENGAGEMENT</b>	ELECTRIC CLUTCH						
<b>DECK LIFT SYSTEM</b>	MANUAL						
<b>CUTTING WIDTH</b>	32 IN.	36 IN.	48 IN.	52 IN.	52 IN.	60 IN.	60 IN.
<b>CUTTING HEIGHTS</b>	1.5 IN. - 5.0 IN.						
<b>CUTTING POSITIONS</b>	15						
<b>WHEELS</b>							
<b>FRONT</b>	11 X 4.00-5 SEMI-PNEUMATIC		13 X 6.50-6 SEMI-PNEUMATIC				
<b>REAR</b>	18 X 6.50 - 8 RADIAL	18 X 8.50 - 8 RADIAL	20X10.50-8 RADIAL				
<b>MACHINE</b>							
<b>WEIGHT</b>	750 LBS.	760 LBS.	875 LBS.	910 LBS.	940 LBS.	940 LBS.	940 LBS.
<b>LENGTH</b>	63 IN.						
<b>WIDTH (W/O CHUTE)</b>	33 IN.	36.5 IN.	50 IN.	55.5 IN.		63 IN.	
<b>WIDTH (W/ CHUTE)</b>	44.5 IN.	49 IN.	62.25 IN.	67.75 IN.		75.75 IN.	
<b>HEIGHT</b>	48 IN.		50.5 IN.				
<b>WARRANTY</b>							
<b>UNIT</b>	5 YEAR COMMERCIAL / 1000 HOUR / NO HOUR LIMIT FIRST 2 YEARS						
<b>DECK SHELL &amp; FRAME</b>	LIMITED LIFETIME						
<b>ATTACHMENTS &amp; ACCESSORIES</b>							
MULCHING KIT, OPERATOR CONTROLLED DISCHARGE BAFFLE, GRASS COLLECTOR SYSTEM, HEADLIGHT KIT, TRIMMER HOLDER, BUCKET HOLDER, BACKPACK BLOWER HOLDER							

# PRO-WALK®

	32GR	36GR	48GR	36HR	48HE	52HE	60HE
<b>MODEL NUMBER</b>	<b>988150</b>	<b>988151</b>	<b>988152</b>	<b>988184</b>	<b>988185</b>	<b>988186</b>	<b>988187</b>
<b>ENGINE</b>	KAWASAKI® FS481V			KAWASAKI® FS481V	KAWASAKI® FS600V		KAWASAKI® FS691V
<b>HORSEPOWER</b>	14.5 HP			14.5 HP	18.5 HP	18.5 HP	23 HP
<b>DISPLACEMENT</b>	603 CC			603 CC	603 CC	603 CC	726 CC
<b>DRIVE SYSTEM</b>	PEERLESS GEAR DRIVE			HYDRO-GEAR® ZT-2800 TRANSAXLE			
<b>FUEL CAPACITY</b>	5.8 GAL.			5.5 GAL.			
<b>GROUND SPEED</b> <i>(APPROX. Mph) (Forward/Reverse)</i>	5.4 MPH / REVERSE ASSIST			8 MPH / 3 MPH			
<b>STARTER</b>	RECOIL			ELECTRIC			
<b>DECK</b>							
<b>DECK MATERIAL</b>	7 GA.			10 GA.			
<b>DECK CONSTRUCTION</b>	FABRICATED			FABRICATED			
<b>NUMBER OF SPINDLES</b>	2		3	2	3		
<b>BLADE TIP SPEED (FPM)</b>	18,500	18,152	18,500	18,000			
<b>SPINDLE HOUSING MATERIAL</b>	ALUMINUM			FORGED ALUMINUM			
<b>SPINDLE BEARINGS</b>	BALL BEARING			BALL BEARING			
<b>DECK ENGAGEMENT</b>	ELECTRIC CLUTCH			ELECTRIC CLUTCH			
<b>DECK LIFT SYSTEM</b>	MANUAL			MANUAL			
<b>CUTTING WIDTH</b>	32 IN.	36 IN.	48 IN.	36 IN.	48 IN.	52 IN.	60 IN.
<b>CUTTING HEIGHTS</b>	1.5 IN. - 4.5 IN.			1.5 IN. - 4.5 IN.	1.5 IN. - 5.0 IN.		
<b>CUTTING POSITIONS</b> <i>(1/4 IN. Increments)</i>	13			13	15		
<b>WHEELS</b>							
<b>FRONT WHEELS</b>	9 X 3.50-4 SEMI-PNEUMATIC			11 X 4-5 SEMI-PNEUMATIC			
<b>REAR</b>	13 X 5-6	13 X 6.5-6	13 X 6.5-6	21 X 7-10	20 X 8-10		
<b>MACHINE</b>							
<b>WEIGHT</b>	504 LBS.	504 LBS.	572 LBS.	701 LBS.	740 LBS.	770 LBS.	795 LBS.
<b>LENGTH</b>	77 IN.			80.5 IN.	75.5 IN.	77.5 IN.	78.3 IN.
<b>WIDTH</b>	45.7 IN.	48.4 IN.	60.8 IN.	36.8 IN.	50 IN.	55 IN.	63 IN.
<b>HEIGHT</b>	41.9 IN.			45 IN.			
<b>WARRANTY</b>							
<b>UNIT</b>	2 YEAR LIMITED COMMERCIAL			4 YEAR COMMERCIAL / 750 HOUR NO HOUR LIMIT FIRST 2 YEARS			
<b>DECK SHELL &amp; FRAME</b>	N/A						
<b>ATTACHMENTS &amp; ACCESSORIES</b>							
MULCHING KIT, CLOTH GRASS COLLECTOR, GRASS CATCHER ATTACHMENT BRACKET, OPERATOR CONTROLLED DISCHARGE BAFFLE SINGLE WHEEL SULKY, TWO WHEEL SULKY <i>(SINGLE AND TWO WHEEL SULKY'S AVAILABLE ON HYDRO ONLY)</i>							

# PRO-QXT<sup>®</sup> TRACTOR ATLAS JSV<sup>®</sup>

3200		3400		3400SD		6400	
<b>MODEL NUMBER</b>	985911	<b>MODEL NUMBER</b>	996206	996205	996204	996207	
ENGINE	KOHLER <sup>®</sup>	ENGINE	POLARIS <sup>®</sup> 2-CYLINDER, DOHC, GAS				
HORSEPOWER	14 HP	HORSEPOWER	40 HP				
DISPLACEMENT	429 CC	DISPLACEMENT (CC)	999 CC				
DRIVE SYSTEM	HYDRO-GEAR <sup>®</sup> ZT - 2800 TRANSAXLES	DRIVE SYSTEM	ON-DEMAND TRUE AWD/2WD/VERSATRACTURF MODE				
FUEL CAPACITY	1.8 GAL.	FUEL CAPACITY	11.5 GAL.				
GROUND SPEED (APPROX. Mph) (Forward/Reverse)	5 MPH / 2 MPH	GROUND SPEED (APPROX. Mph)	35 MPH				
STARTER	ELECTRIC & RECOIL	STARTER	ELECTRIC IGNITION				
<b>TIRES &amp; WHEELS</b>							
REAR	TURF 20 X 8 - 10	FRONT & REAR SUSPENSION	IFS DUAL A-ARM				
<b>MACHINE</b>							
WEIGHT (W/O FUEL)	520 LBS.	FRONT & REAR TIRES	26 X 10 HEAVY DUTY				
LENGTH	55.5 IN.	FRONT & REAR WHEELS	12 X 6 STEEL				
WIDTH	30.5 IN.	<b>FEATURES</b>					
HEIGHT	39 IN.	STEERING	RACK & PINION		ELECTRIC POWERED STEERING		
<b>PTO COUPLER</b>							
PTO SPEED	900 RPM	BED LIFT	SHOCK ASSIST	STANDARD ELECTRIC			
ENGAGEMENT	ELECTRIC	BED MATERIAL	POLY		STEEL	POLY	
PTO DRIVE	DUAL BELT	FRONT BUMPER	STANDARD, HEAVY DUTY				
<b>FEATURES</b>							
HOUR METER	STANDARD	HITCH	STANDARD, HEAVY DUTY				
POWER STEERING	STANDARD	ROPS	ACCORDING TO ANSI/OPEI B71.9, OSHA 1928.53				
POWER STEERING LOCK OUT	STANDARD	<b>VEHICLE DIMENSIONS</b>					
<b>WARRANTY</b>							
TRACTOR	4 YEAR / 500 HOUR COMMERCIAL NO HOUR LIMIT FIRST 2 YEARS						
ENGINE	5 YEAR LIMITED						
<b>ACCESSORIES</b>							
WORK LIGHT, TIRE CHAIN, AG TIRES, TWIST GRIP RING							

ATTACHMENTS	MODEL	WIDTH
POWER BRUSH	885911	44 IN.
DOZER BLADE	885910	48 IN.
SNOW BLOWER	885912	32 IN.
BRUSH MOWER	885913	32 IN.
FINISH MOWER	885914	36 IN.
FINISH MOWER	885915	48 IN.
AERATOR	885916	29 IN.
DETHATCHER	885917	27 IN.

42		52		52		60	
<b>MODEL NUMBER</b>	915255	<b>MODEL NUMBER</b>	915256	915257	915274		
ENGINE	KOHLER <sup>®</sup> 7000 PRO TWIN			KAWASAKI <sup>®</sup> FR691			
HORSEPOWER	22 HP		24 HP	23 HP			
DISPLACEMENT	725 CC			726 CC			
DRIVE SYSTEM	HYDRO-GEAR <sup>®</sup> EZT TRANSAXLES						
FUEL CAPACITY	2.8 GAL.						
GROUND SPEED (APPROX. Mph) (Forward/Reverse)	7 MPH / 3 MPH						
<b>DECK</b>							
DECK MATERIAL	11 GA.						
DECK CONSTRUCTION	FABRICATED						
NUMBER OF SPINDLES	3						
BLADE TIP SPEED (FPM)	17,000						
SPINDLE HOUSING MATERIAL	STEEL MACHINED						
SPINDLE BEARINGS	SEALED						
DECK ENGAGEMENT	ELECTRIC WARNER <sup>®</sup>						
DECK LIFT SYSTEM	FOOT OPERATED, DIAL SELECTION						
CUTTING WIDTH	42 IN.		52 IN.	52 IN.	60 IN.		
CUTTING HEIGHT	1.5 IN. - 4.5 IN.						
CUTTING POSITIONS	13						
<b>WHEELS</b>							
FRONT	11 X 6-5						
REAR	20 X 8-8			20 X 10-8			
<b>FEATURES</b>							
SEAT	PLUSH HIGH BACK 18 IN. W/ SEAT SPRINGS & ARM REST				PLUSH HIGH BACK 18 IN. W/ SEAT SPRINGS, LEVER ADJUST, ARM RESTS		
HOUR METER	STANDARD						
<b>MACHINE</b>							
WEIGHT	570 LBS.		615 LBS.	605 LBS.	634 LBS.		
LENGTH	77.5 IN.						
WIDTH	54.2 IN.		63.4 IN.	73 IN.			
HEIGHT	40.9 IN.						
<b>WARRANTY</b>							
UNIT	3 YEARS OR 300 HOURS						
<b>ATTACHMENTS &amp; ACCESSORIES</b>							
2-BAG POWERED BAGGER, MULCH KIT, L.E.D. LIGHT KIT, FLEX-TEND <sup>®</sup> SHOULDER SUPPORT SYSTEM, CHROME REAR WHEEL COVERS, 48-IN. PLUG AERATOR, 36-IN. POLY ROLLER, 48-IN. DETHATCHER, 15-GALLON SPRAYER, TOW-BEHIND SPREADER, TRAILER HITCH KIT							

# ZT X



# ZT XL

	42		48		52		60	
<b>MODEL NUMBER</b>	915259		915262		915261		915258	
<b>ENGINE</b>	KOHLER® 7000 PRO TWIN W/ SMART CHOKE™		KAWASAKI® FR651		KAWASAKI® FR691		KOHLER® 7000 PRO TWIN W/ SMART CHOKE™	
<b>HORSEPOWER</b>	24 HP		21.5 HP		23 HP		25 HP	
<b>DISPLACEMENT</b>	725 CC		726 CC		726 CC		725 CC	
<b>DRIVE SYSTEM</b>	HYDRO-GEAR® ZT-2800 TRANSAXLES & 7 IN. FANS							
<b>FUEL CAPACITY</b>	2.8 GAL.							
<b>GROUND SPEED (APPROX. Mph)</b> <i>(Forward/Reverse)</i>	7.5 MPH / 3 MPH							
<b>DECK</b>								
<b>DECK MATERIAL</b>	11 GA.							
<b>DECK CONSTRUCTION</b>	FABRICATED							
<b>NUMBER OF SPINDLES</b>	3							
<b>BLADE TIP SPEED (FPM)</b>	17,000							
<b>SPINDLE HOUSING MATERIAL</b>	STEEL MACHINED							
<b>SPINDLE BEARINGS</b>	SEALED							
<b>DECK ENGAGEMENT</b>	ELECTRIC WARNER®							
<b>DECK LIFT SYSTEM</b>	FOOT OPERATED							
<b>CUTTING WIDTH</b>	42 IN.	42 IN.	48 IN.	52 IN.	52 IN.	60 IN.	60 IN.	
<b>CUTTING HEIGHT</b>	1.5 IN. - 4.5 IN.							
<b>CUTTING POSITIONS</b>	13							
<b>WHEELS</b>								
<b>FRONT</b>	11 X 6-5							
<b>REAR</b>	20 X 8-10		20X10-10				20 X 12-10	
<b>FEATURES</b>								
<b>SEAT</b>	18 IN. PLUSH HIGH BACK W/ PADDED ARM RESTS, SEAT ISOLATION STANDARD							
<b>HOURLY METER</b>	STANDARD							
<b>MACHINE</b>								
<b>WEIGHT</b>	615 LBS.		612 LBS.		630 LBS.		645 LBS.	
<b>LENGTH</b>	69 IN.							
<b>WIDTH (W/CHUTE)</b>	58 IN.	58 IN.	64 IN.	68 IN.	68 IN.	75 IN.	75 IN.	
<b>HEIGHT</b>	42 IN.							
<b>WARRANTY</b>								
<b>UNIT</b>	4 YEARS / 400 HOURS							
<b>ATTACHMENTS &amp; ACCESSORIES</b>								
2-BAG POWERED BAGGER, BAGGER ADAPTER (60" MODEL ONLY), MULCH KIT, L.E.D. LIGHT KIT, FLEX-TEND® SHOULDER SUPPORT SYSTEM, CHROME FRONT WHEEL COVERS, CHROME REAR WHEEL COVERS, 48-IN PLUG AERATOR, 36-IN. POLY ROLLER, 48-IN. DETHATCHER, 15-GALLONS PRAYER, TOW-BEHIND SPREADER, TRAILER HITCH KIT								

# ZT HD

	44		48		48		52		52		60		60		
<b>MODEL NUMBER</b>	991160		991162		991152		991164		991154		991166		991156		
<b>ENGINE</b>	KAWASAKI® FR651		KAWASAKI® FR TWIN		KOHLER® 7000 PRO TWIN W/ SMART CHOKE™		KAWASAKI® FR TWIN		KOHLER® 7000 PRO TWIN W/ SMART CHOKE™		KAWASAKI® FR TWIN		KOHLER® 7000 PRO TWIN W/ SMART CHOKE™		
<b>HORSEPOWER</b>	21.5 HP		23 HP		25 HP		23 HP		25 HP		24 HP		26 HP		
<b>DISPLACEMENT</b>	726 CC		726 CC		725 CC		726 CC		725 CC		726 CC		725 CC		
<b>DRIVE SYSTEM</b>	HYDRO-GEAR® ZT-3100 TRANSAXLES														
<b>FUEL CAPACITY</b>	5.0 GAL.														
<b>GROUND SPEED (APPROX. Mph)</b> <i>(Forward/Reverse)</i>	8 MPH / 4 MPH														
<b>DECK</b>															
<b>DECK MATERIAL</b>	10 GA.														
<b>DECK CONSTRUCTION</b>	WELDED														
<b>NUMBER OF SPINDLES</b>	3														
<b>BLADE TIP SPEED (FPM)</b>	18,000														
<b>SPINDLE HOUSING MATERIAL</b>	FORGED ALUMINUM														
<b>SPINDLE BEARINGS</b>	BALL BEARING														
<b>DECK ENGAGEMENT</b>	ELECTRIC OGURA®														
<b>DECK LIFT SYSTEM</b>	FOOT OPERATED														
<b>CUTTING WIDTH</b>	44 IN.	44 IN.	48 IN.	48 IN.	48 IN.	52 IN.	52 IN.	52 IN.	52 IN.	60 IN.	60 IN.	60 IN.	60 IN.	60 IN.	
<b>CUTTING HEIGHT</b>	1.5 IN. - 5.0 IN.														
<b>CUTTING POSITIONS</b>	15														
<b>WHEELS</b>															
<b>FRONT</b>	13 X 6.5-6		13 X 5-6		13 X 6.5-6										
<b>REAR</b>	22 X 10-12				22 X 10.5-12				22 X 12-12						
<b>FEATURES</b>															
<b>SEAT</b>	20 IN. PLUSH HIGH BACK COMFORT , LEVER ADJUST, PADDED ARM RESTS														
<b>HOURLY METER</b>	STANDARD														
<b>MACHINE</b>															
<b>WEIGHT</b>	805 LBS.		825 LBS.		850 LBS.				870 LBS.						
<b>LENGTH</b>	79 IN.														
<b>WIDTH (W/CHUTE)</b>	56 IN.	56 IN.	63 IN.	63 IN.	67 IN.	67 IN.	75 IN.	75 IN.	75 IN.	75 IN.	75 IN.	75 IN.	75 IN.	75 IN.	
<b>HEIGHT</b>	47 IN.														
<b>WARRANTY</b>															
<b>UNIT</b>	4 YEARS / 500 HOURS														
<b>ATTACHMENTS &amp; ACCESSORIES</b>															
2-BAG POWERED BAGGER, BAGGER MOUNT KIT, MULCH KIT, OPERATOR-CONTROLLED CHUTE BAFFLE, DISCHARGE COVER KIT, VACUUM BAFFLE KIT, LAWN STRIPING KIT, LIGHT KIT, FLEX-TEND® SHOULDER SUPPORT SYSTEM, SEAT ISOLATOR KIT, SEAT SPRING KIT, FOLDING ROPS KIT, SUNSHADE, CHROME FRONT WHEEL COVERS, CHROME REAR WHEEL COVERS, TRAILER HITCH KIT, 48-IN. PLUG AERATOR, 36-IN. POLY ROLLER, 48-IN. DETHATCHER, 15-GALLON SPRAYER, TOW-BEHIND SPREADER															

# GRAVELY HELPS MONEY WORK HARDER TOO.

Put equipment in the hands of the ones who need it most with financing options through Gravelly. Accelerate getting the tools you need to get the job done with affordable plans provided through our network of authorized independent finance companies.

Visit your local dealer to learn more.



## VISIT US ONLINE AT GRAVELY.COM

for Product Information, Consumer Reviews, Product Videos,  
Dealer Locator, Product Selector, and Customer Support.



Registered trademark and <sup>TM</sup> trademark of AriensCo. Kohler®, Kawasaki®, Yamaha®, and Hydro-Gear® are registered trademarks of their respective companies. The engine horsepower information is provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower will be less. Visit [www.gravelly.com](http://www.gravelly.com) for a complete listing of engine manufacturer power rating information. Product features and specifications subject to change without notice. Photos are a representation of the product; actual product may vary. © Copyright 2020 AriensCo. All rights reserved. 0120

