

# SNOW & ICE CONTROL ATTACHMENTS FOR UTV, TRACTOR, SKID-STEER, & WHEEL LOADERS

**WESTERN**

“

MORE JOBS.  
**DONE FASTER.**





## RISE TO NEW CHALLENGES WHETHER OR NOT THEY HAPPEN DURING REGULAR BUSINESS HOURS

- 4-7** UTV & SUB-COMPACT TRACTOR PLOWS
- 8-9** TRACTOR PLOWS
- 10-13** SKID-STEER, WHEEL LOADER, TRACTOR PLOWS
- 14-27** UTV & TRACTOR SPREADERS
- 28-31** SIDEWALK
- 32-35** ACCESSORIES
- 36-43** SPECIFICATIONS

When plowing is your profession, it's up to you to keep the world moving through winter's worst. Less time worrying about your equipment means more time for clearing lots.

The ticking clock controls your paycheck. Minutes wasted are dollars lost. When your schedule is packed and your budget even tighter, the only thing worth your hard-earned money is *better results*.

That's why Western Products builds efficiency into every feature of our plows and spreaders. With more than 70 years of experience behind us, Western Products knows what it takes to conquer all the depths of winter.

Mother Nature may not offer guarantees—but we build a promise into every piece of equipment we make:

**MORE JOBS. DONE FASTER.**

# BIG PLOW PERFORMANCE FOR YOUR UTV.

Winter knows no limits—which means you shouldn't either. Built exclusively for utility vehicles and sub-compact tractors, the WESTERN® IMPACT™ heavy-duty snowplows are professional-grade plows for anywhere that demands WESTERN grade performance. Constructed from high-strength, low-alloy steel components, both models feature an easy-on/easy-off UTV mounting system and removable receiver brackets for exceptional ground clearance. IMPACT heavy-duty plows feature Scrape Lock for clean scraping and back dragging.

## ACCESSORIES

Rubber Snow Deflectors | Poly Cutting Edges | Shoe Kits | Light Bar Kit  
Curb Guards (straight blade only) | Wing Extension Kits (V-plow only)  
Blade Stop Kit (V-plow only)

Consult your local WESTERN dealer or [westernplows.com](http://westernplows.com) for accessory compatibility and availability.



**WIDTHS:** 6'

**PLOW TYPE:** Straight Blade & V-Plow

**VEHICLE APPLICATIONS:** Full-Size & Heavy-Duty UTV, Series 1 Tractors



## V-PLOW BLADE

### BLADE CONSTRUCTION

The IMPACT™ flared V-plow blades go from a 25¼" center height to a full 29¼" at the outer edge.

### STRUCTURAL REINFORCEMENT

Six vertical ribs and our proven T-frame design provide added strength and reinforcement.

### DOUBLE-ACTING CYLINDERS

UltraLock double-acting cylinders allow the operator to use the V-plow in straight blade mode by locking the wings together instead of having to toggle each wing independently.

### STEEL CUTTING EDGES

5" high-carbon steel cutting edge comes standard, reducing wear and extending the life of the blade.

### TRIP PROTECTION

Each blade features independent trip-edge protection in all configurations, whether in V, scoop, or straight, to keep snow in front of the blade.

# IMPACT™

## HEAVY-DUTY PLOWS

## STRAIGHT BLADE

### BLADE CONSTRUCTION

6'-wide, 14-gauge powder coated steel moldboard.

### STRUCTURAL REINFORCEMENT

Four vertical ribs for strength and durability.

### STEEL CUTTING EDGES

5" high-carbon steel cutting edge comes standard, reducing wear and extending the life of the blade.

### TRIP PROTECTION

Protects your plow and UTV by allowing the whole blade to trip when encountering hidden obstacles.

# MID-DUTY UTV APPLICATIONS. HEAVY-DUTY PERFORMANCE.

The WESTERN® IMPACT™ mid-duty straight blade plows are perfectly sized for your mid-duty sport or recreational UTV without sacrificing performance. Packages available in either full hydraulic lift and angle or winch lift manual angle versions. The blade is available in two widths, 5'6" or 6'—the 5'6" blade widths are perfect for sidewalks and 6' blades are ideal for wider areas/driveways. High-strength components ensure commercial durability. The available hydraulic blade controls allow the operator to make the necessary blade adjustments quickly from inside the cab for fast and efficient winter cleanup.

## 5'6" AND 6' WIDE STEEL MOLDBOARD

Constructed from high-strength, low-alloy steel components, Western Products provides better durability and performance than stamped steel or plastic products—especially when working on brutal sidewalk surfaces. To ensure maximum efficiency when cleaning sidewalks, the plow's width covers the wheel track at all times to make each pass count.

## SWAY-FRAME™ DESIGN

To ensure the blade stays aligned with the wheel track, the patent-pending Sway-Frame design allows the blade to shift side-to-side. This keeps the blade in the optimal position to maximize cleanup with each pass, preventing the UTV wheels from packing down missed snow.

## RELIABLE HYDRAULICS\*

Full-hydraulic operation allows the operator to position the plow left, right, up, down, or float from inside the cab. This hydraulic system has been specifically designed to operate on mid-duty UTV plows, minimizing amperage draw and weight for seamless operation.

## WEATHERPROOF PLOW CONTROL\*

The deluxe plow control is IP66-rated against moisture and offers hand-held or dash-mounted operation for added flexibility. The weather-resistant control features large, durable switches which are easy to use—even with heavy gloves on.

## GROUND CLEARANCE\*\*

The removable receivers and low profile undercarriage provide exceptional ground clearance to maximize ramp angle, so your unit will be trail-ready when the plow is not attached.

## ACCESSORIES

Shoe Kit | Rubber Snow Deflector  
Cutting Edges | Control Cup Holder Mount

Consult your local WESTERN® dealer or [westernplows.com](http://westernplows.com) for accessory compatibility and availability.


\*Available for hydraulic models only.  
\*\*Not applicable to some mounts.



**WIDTHS:** 5'6" & 6'

**PLOW TYPE:** Straight Blade

**VEHICLE APPLICATIONS:** Mid-Duty UTV

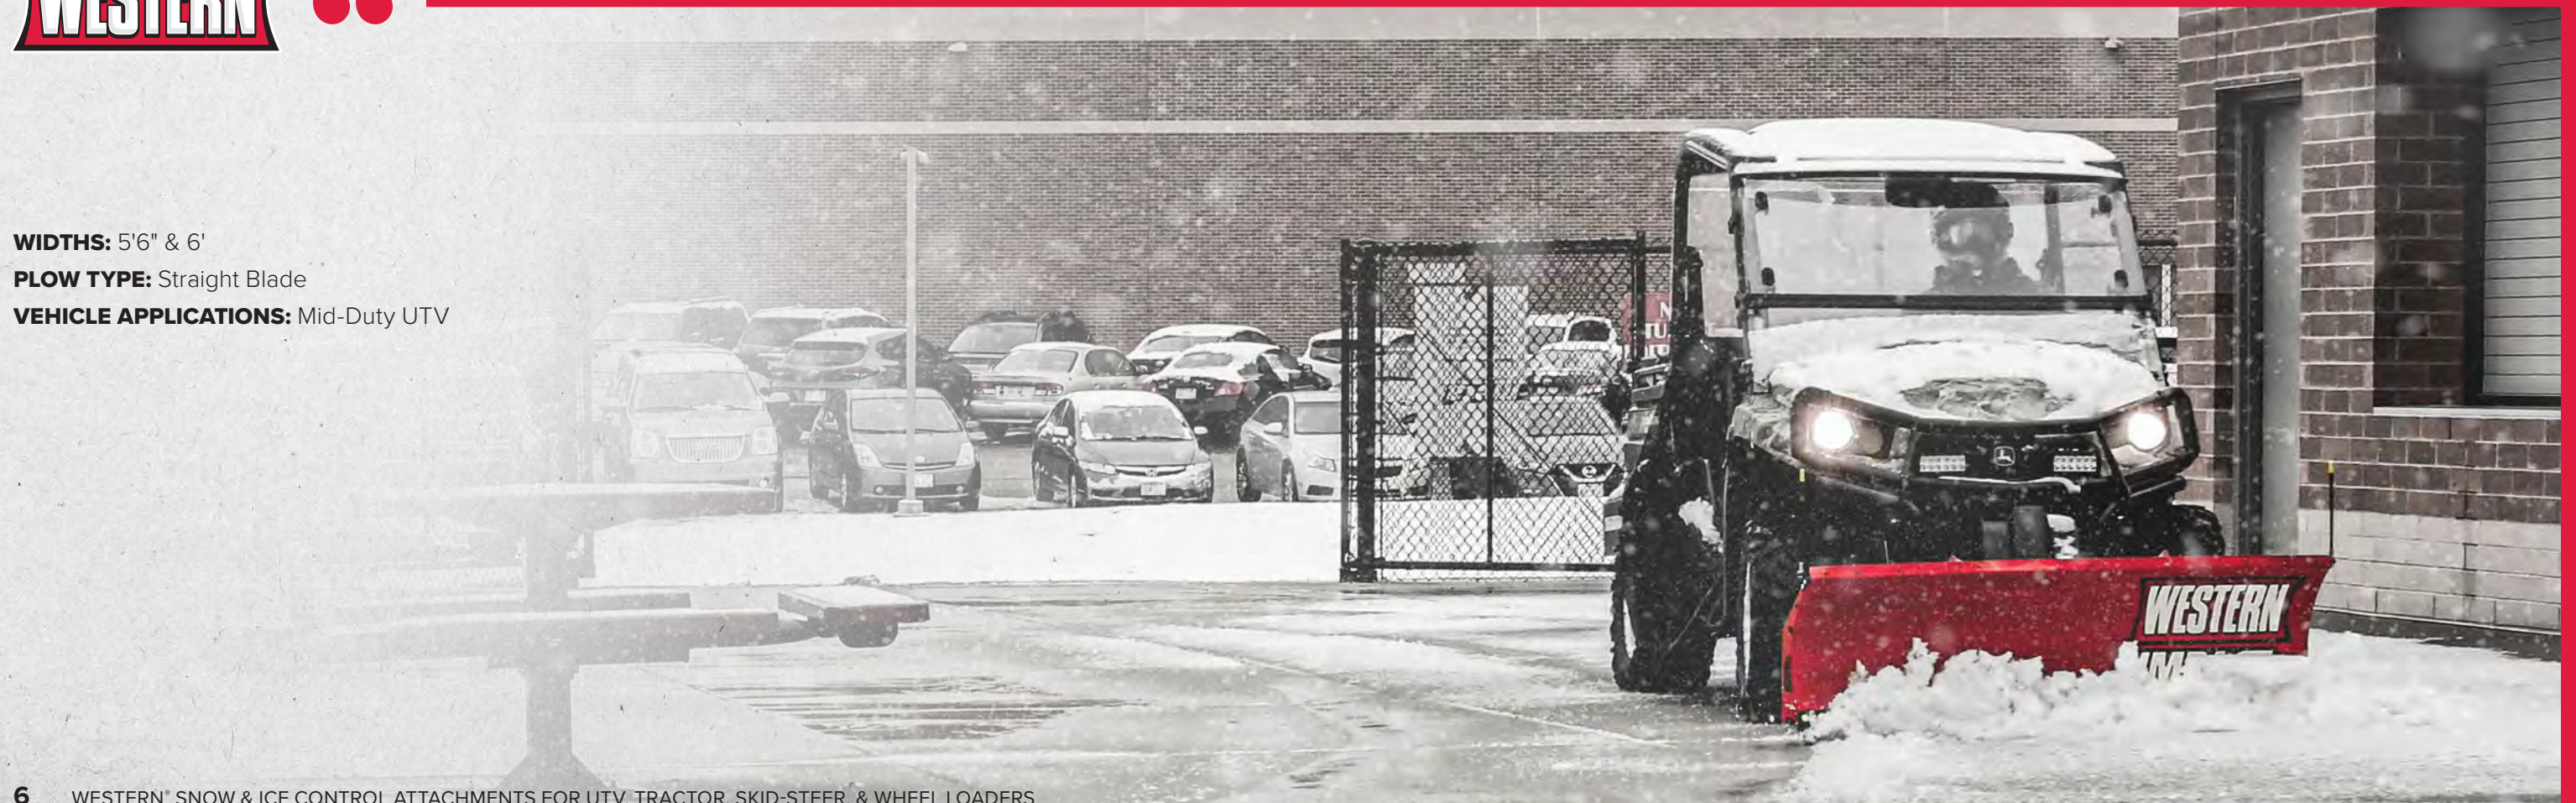

# SNOWPLOWING VERSATILITY FOR TRACTORS.

The WESTERN® tractor mount kits accommodate the demand for tractor mounted snowplowing applications. Designed for easy installation onto a wide range of tractor models, these kits are flared both vertically and horizontally to ensure proper alignment and make the drive-in connection easier. This allows you to attach WESTERN heavy-duty straight blades, V-plows, and winged plows to tractors, providing increased efficiency and versatility.

## STRAIGHT BLADE PLOWS FOR TRACTORS

The best value from a cost perspective when compared to other snowplow types, straight blade plows also offer operators a number of benefits. Straight blades are the easiest plows to operate with simple controls, and because there are fewer moving parts, they are extremely durable and reliable. When it comes to clearing large, open lots, straight blades are an efficient way to get the job done.

Tractor mount kits are available for the following WESTERN straight blade models:

- PRO PLUS® (8', 8'6", and 9' models)
- IMPACT™ Heavy-Duty
- PRO-PLOW® Series 2 (7'6" models)

## V-PLOWS FOR TRACTORS

Providing power, productivity, and performance, V-plows are a great choice for operators that handle a variety of job types. Operate in V-mode to break through heavy snow or drifts, scoop mode when in tighter spaces or for carrying large amounts of snow, or lock the wings in straight blade mode when plowing big, wide open spaces. Bottom line, V-plows are the most universal plows to handle all plowing needs.

Tractor mount kits are available for the following WESTERN® V-plow models:

- MVP 3™ (8'6" and 9'6" models)
- IMPACT™ Heavy-Duty
- ENFORCER™ (7'6" models)

## TRACTOR MOUNT KITS

### WINGED PLOWS FOR TRACTORS

Adjustable and multi-position wing snowplows offer unmatched versatility, letting operators automatically adjust the wings to the most efficient plowing configuration for the job. Adjustable wing plows offer the most control and maneuverability by allowing the wings to move into retracted straight, expanded straight, windrow, and scoop positions, all at the touch of a button. Whether plowing in large areas or tighter spaces, get more jobs done faster with winged plow efficiency.

Tractor mount kits are available for the following WESTERN winged plow models:

- PRODIGY™
- WIDE-OUT™ (8'–10' model)

### ACCESSORIES

Lighting Harness Kit



ALL-NEW SUB-COMPACT TRACTOR APPLICATION

# WHEN ONLY A SKID-STEER WILL DO.

The WESTERN® skid-steer snowplow lineup makes busting out parking lots quicker and easier than ever before. Choose the easy-to-use and ultra-efficient PRODIGY™ snowplow or the heavy-duty and always reliable PRO PLUS® snowplows, so your crew can get the job done quicker and move on to the next lot faster.



## ACCESSORIES

Rubber Deflectors | Shoe Kits | Quick Coupler Set

Consult your local WESTERN dealer or [westernplows.com](http://westernplows.com) for accessory compatibility and availability.



## PRODIGY

**WIDTHS:** 8'7"

**PLOW TYPE:** Automatic Wing Plow

**VEHICLE APPLICATIONS:** Skid-Steer

## PRO PLUS

**WIDTHS:** 8', 8'6", 9'

**PLOW TYPE:** Straight Blade

**VEHICLE APPLICATIONS:** Skid-Steer

## SKID-STEER

### PRODIGY™ SKID-STEER PLOW

The PRODIGY snowplow features patented wing technology that automatically adjusts to the most efficient plowing configuration for the job. The automatic movement of the wings is ideal for skid-steers because it provides wing-plow performance on a skid-steer platform with no additional wiring or controls.

### PRO PLUS® SKID-STEER PLOW

The impressive strength of the PRO PLUS snowplow makes it the straight blade of choice for punishing skid-steer applications. The PRO PLUS plow comes in a variety of blade widths so you can find the perfect plow for the job.

### ONBOARD HYDRAULICS

Skid-steer plows are quick to install and easy to operate. Leverage the skid-steer's onboard hydraulic system for powerful, efficient operation. Relief valves help protect the operator and the equipment when encountering hidden obstacles.

### OSCILLATING SKID-STEER MOUNT

The universal, oscillating skid-steer mounting plate provides a number of application options. With six degrees of total side-to-side oscillation, the blade can easily follow the contours of the pavement for a cleaner scrape.



# GO BIG WITH SNOW REMOVAL.

When the snow starts falling, there's no time to waste. The world keeps moving, and the snow needs to get out of the way. With TRACE™ edge technology, the all-new PILE DRIVER™ pusher plows move massive amounts of snow—scraping down to the pavement—so you can get more jobs done faster. Available in 8', 10', and 12' widths, these pushers raise the bar on efficiency.

## TRACE EDGE TECHNOLOGY

The Terrain Response Advanced Cutting Edge is comprised of independent, 2' sections that raise, oscillate, and trip to accommodate contours and obstacles in the plowable surface. Working together, the sections remove more snow, reducing the amount of salt required. Two greasing locations allow the operator to keep the components well lubricated for maximum performance.



RAISE



OSCILLATE



TRIP



“

## COMMON ATTACHMENT PLATE

A common attachment plate with floating coupler makes installation easy with a wide variety of equipment and machinery, including skid-steers, wheel loaders, backhoes, and tractors. The floating coupler reduces negative down pressure from the vehicle, protecting against premature wear of the pusher cutting edge and components.



## SELF-LEVELING SIDE PLATES WITH REVERSIBLE, BOLT-ON SKIS

The side plates ensure the TRACE edge remains in direct contact with the plowable surface. The reversible, bolt-on ski makes serviceability easy, allowing you to use both edges of the ski before replacing. The bolt-on design makes replacement in the field possible with a 3/4" socket, ratchet, and 3/4" wrench.



## 3/4" CUTTING EDGE WITH CARBIDE INSERTS

Each 2' section comes standard with a 3/4" cutting edge with carbide insert that extends the life of a high-carbon blade up to 20 times. And each section uses the same part number for easy replacement. No need to replace the full cutting edge, only the sections that show wear.

## EASY OPERATION

Operation is conveniently tied into the equipment's controls. Simply raise and lower the lift arm and angle the attachment plate to position the pusher in the correct orientation.



# PURPOSE-BUILT FOR UTVS.

The Striker™ 0.35 cu yd stainless steel hopper spreader delivers reliable, low-maintenance performance with more control. The 0.35 cu yd model is designed to allow material to flow smoothly and efficiently, and is purpose-built with many of the same features of our larger Striker hopper spreaders but at the right size for UTVs.

## CORROSION-RESISTANT HOPPER

The low-maintenance, stainless steel riveted construction provides durability for long-life and protection against stress.

## MATERIAL DELIVERY

Features a 11½"-wide pintle chain conveyor system that moves material consistently and smoothly to prevent bridging.

## DUAL VARIABLE-SPEED CONTROL

Allows operators to easily control salt and sand spread and precisely match material delivery and spread pattern to conditions.

## FLIP-UP CHUTE

Provides convenient access to the hitch and easy clean-out. The chute can be quickly attached or removed and does not require any tools to do so.

## DRIVE-TRAIN

Powerful four pole motor and sealed gearbox, offer direct drive and require no maintenance or adjustment. Electronics feature sealed connectors and are well protected from the elements. Their stainless steel enclosure is rugged and requires no tools to gain access to electronics.

## ACCESSORY INTEGRATION

Conveniently connect accessories directly into the fully enclosed accessory hub mounted in the back of the hopper. Accessories automatically integrate with the hopper control without having to run additional wires from the front of the UTV.

## ACCESSORIES

0.25 cu yd Extension Collars | Spill Guard Kit  
LED Work Light Kit | LED Strobe Light Kit  
Vibrator Kit | Inverted V Kit | License Plate Kit  
Ratchet Tie-Down Kit | UTV Spreader Control Shield

Consult your local WESTERN® dealer or [westernplows.com](http://westernplows.com) for accessory compatibility and availability.



“

**SPREADER TYPE:** Hopper

**CAPACITY:** 0.35 cu yd

**MATERIAL APPLICATION:** Rock Salt

**SPREAD PATTERN:** Broadcast



Photo may be shown with optional accessories.





# MORE UTILITY FROM YOUR UTV.

The WESTERN® Tornado™ UTV 11 cu ft poly hopper spreader is built just for UTVs. It features a sturdy, compact design that delivers many features of the larger models, in a size just right for your utility vehicle.

## DUAL ELECTRIC MOTORS

Two instant-start, 12-volt electric motors provide quiet, reliable, independent control over the auger and spinner mechanisms. The spinner motor is sealed inside a weather-resistant housing, protecting it from corrosion.

## DUAL VARIABLE-SPEED CONTROL

Dual variable-speed control allows you to precisely match material delivery and spread patterns to conditions. A switch to run the vibrator is integrated into the control for operator convenience.

## MATERIAL DELIVERY

Material is delivered by a heavy-duty, powder-coated, horizontal steel auger that automatically backs itself in and out until an obstruction is cleared or a required adjustment has been made.

## INVERTED V / VIBRATOR

The standard inverted V helps keep material weight off the auger, ensuring smooth startup and flow of material. The inverted V is directly connected to the vibrator to reduce bridging and keep material moving to the auger.

## SPINNER AND SPREADING WIDTH

The durable 12" spinner delivers a spreading width of up to 30' and features top and bottom guards that protect the spinner from damage if backed into a solid object.

## QUICK-CONNECT SPINNER / CHUTE ASSEMBLIES

Gain easy access to the hitch by removing the quick-connect spinner drive and chute assemblies. No tools required.

## CORROSION-RESISTANT HOPPER

The one-piece hopper is built of durable polyethylene for corrosion-free performance.

**Tornado** UTV

## TOP SCREEN

The standard coated steel top screen helps break up large chunks of de-icing material during the loading process to help prevent clogging and bridging during spreader operation.

## COVER

A fitted tarp cover helps de-icing material stay dry to prevent clumping.

## RATCHET STRAPS

Add additional spreader stability to your vehicle with standard nylon tie-down ratchet straps.

## ACCESSORIES

Material Control Tube | Optimum Flow Kit

Consult your local WESTERN® dealer or [westernplows.com](http://westernplows.com) for accessory compatibility and availability.



**SPREADER TYPE:** Hopper

**CAPACITY:** 11.0 cu ft

**MATERIAL APPLICATION:** Rock Salt

**SPREAD PATTERN:** Broadcast



# CONSISTENCY MEETS EFFICIENCY.

Designed to attach to a wide variety of vehicles, the WESTERN® PRO-FLO™ 525 and PRO-FLO™ 900 poly tailgate spreaders feature a two-stage, auger-fed delivery system and dual variable-speed control for consistent and efficient flow of all types of de-icing materials.

## DUAL ELECTRIC MOTORS

Two instant-start, 12-volt electric motors provide quiet, reliable, independent control over the auger and spinner mechanisms. The spinner motor is sealed inside a weather-resistant housing, protecting it from corrosion.

## MATERIAL DELIVERY

Material is delivered by a heavy-duty, powder-coated, horizontal steel auger that automatically backs itself in and out until an obstruction is cleared.

## DUAL VARIABLE-SPEED CONTROL

Enhanced, dual variable-speed control allows you to precisely match material delivery and spread patterns to conditions. Four standard accessory buttons and a dedicated blast button provide optimum in-cab efficiency. Easy-to-understand, digital self-diagnostics alert the operator when the spreader is empty or when adjustments are needed, and LEDs make the control easy to read.

## SPINNER AND SPREADING WIDTH

The PRO-FLO™ 525 spreader features a 10" nylon/glass-reinforced resin spinner that delivers a spreading width up to 30'. The PRO-FLO™ 900 spreader features a 12" steel spinner that delivers a spread width up to 40 feet.

## INVERTED V / VIBRATOR

The standard inverted V helps keep material weight off of the auger, ensuring smooth startup and flow of material. The inverted V is directly connected to a 12-volt vibrator to help reduce bridging and keep material moving to the auger.

## ACCESSORY INTEGRATION

Conveniently connect accessories directly into the spreader module mounted in the spinner motor

**PRO-FLO™ 525**

**PRO-FLO™ 900**

enclosure. Accessories automatically integrate with the tailgate control without having to run additional wires from the front of the UTV.

## TOP SCREEN AND COVER

The steel rod top screen breaks up chunks of de-icing material and a molded polyethylene lid protects the materials from the elements.

## ACCESSORIES

Material Control Tube | Work Light Kit  
Spreader Control Adapter Plate for Cup Holder Mount | UTV Spreader Control Shield  
Control Cup Holder Mount

Consult your local WESTERN® dealer or [westernplows.com](http://westernplows.com) for accessory compatibility and availability.



## CAPACITY AND MOUNT OPTIONS

### PRO-FLO™ 525 & 900 SPREADERS

Feature a 5.25 cu ft or 9.00 cu ft poly hopper for long-lasting durability that holds bagged or bulk de-icing material. Comes standard with a combination 2" receiver hitch and 3-point hitch mount.

**SPREADER TYPE:** Tailgate

**CAPACITY:** 5.25 cu ft or 9.00 cu ft

**MATERIAL APPLICATION:** Rock Salt

**SPREAD PATTERN:** Broadcast

**MOUNT OPTIONS:** 525 (Standard Mounts):  
Standard 2" Receiver, 3-Point Combo Mount

900 (Mounts Sold Separately): Pivot Mount,  
2" Receiver Hitch (requires adapter mount),  
3-Point Hitch Mount



# A DIFFERENT POINT OF VIEW.

Get a better look at your high-quality work as you move onto the next job with the WESTERN® Low Profile tailgate spreaders. These high-density, single-stage, poly tailgate spreaders sit lower to deliver top spreader performance without affecting the operator's view from behind the wheel.

## LOW PROFILE

### ELECTRIC DRIVE MOTOR

A fully enclosed, 12-volt electric, 1/3 hp motor is mounted inside a sealed housing, protecting it from corrosion.

### SPINNER AND SPREADING WIDTH

Model 500 features a durable 10" polyurethane spinner that delivers a spreading width of up to 30 feet.

### CONTROLS

Choose between a variable-speed control with an "on/off" button and blast option to optimize material usage or a basic "on/off" toggle control (controls are sold separately).

### COVER

A latching, molded polyethylene lid protects de-icing material from the elements.

### MATERIAL DELIVERY

Material is delivered by a powder coated, vertical steel auger. The unique design helps break up clumps and prevents material from spilling.

### RATCHET STRAPS

Ratchet straps are provided standard for additional spreader stability on the Model 500 spreader.

### ACCESSORIES

Top Screen | Adjustable Deflector | 5-Flight Auger Spreader Control Adapter Plate for Cup Holder Mount.

Consult your local WESTERN® dealer or [westernplows.com](http://westernplows.com) for accessory compatibility and availability.



### CAPACITY AND MOUNT OPTIONS

**MODEL 500** – 5.0 cu ft capacity

Comes standard with a Class III 2" receiver hitch mount.

**SPREADER TYPE:** Tailgate

**CAPACITY:** 5.0 cu ft

**MATERIAL APPLICATION:** Rock Salt

**SPREAD PATTERN:** Broadcast

**MOUNT OPTIONS:** Standard Class III Receiver Hitch Mount



# CONVENIENCE FOR OPERATORS— NO STRINGS ATTACHED.

**LOW-PRO 300W**

When winter won't wait, the WESTERN® LOW-PRO 300W wireless electric tailgate spreader quickly mounts onto utility vehicles and tractors without drilling or wiring. Standard with a completely wireless key fob control, 2" receiver hitch, and a 7-pin plug, this is THE ultimate in plug 'n' play convenience.

## ELECTRIC MOTOR

A fully enclosed, 12-volt electric, 1/3 hp motor and maximum-torque transmission drive the spinner mechanism.

## CORROSION-RESISTANT HOPPER

The LOW-PRO 300W wireless electric tailgate spreader features a corrosion-free polyethylene hopper for long-lasting durability.

## MATERIAL DELIVERY

Material is delivered by a powder coated, vertical steel auger. The unique design helps break up clumps and prevents material from spilling.

## SPINNER AND SPREADING WIDTH

A 10" corrosion-free spinner delivers a spreading width of up to 25' and ensures long life and optimal delivery of bagged salt.

## EASY ON / OFF

Attaching and detaching is easy with the standard 7-pin plug.\*

## WIRELESS CONTROL

The completely wireless key fob control offers one-touch, on/off operation with two spinner speeds to match the spread pattern to the job.



## ACCESSORIES

Clear Weather Cover\*\* | Wireless Vehicle Harness (for use on applications where trailer wiring is not factory installed such as tractors and UTVs)

\*Requires accessory wire harness for integration on UTVs or tractors.  
\*\*Standard for LOW-PRO 300 and 300G models.

Consult your local WESTERN dealer or [westernplows.com](http://westernplows.com) for accessory compatibility and availability.



## CAPACITY AND MOUNT OPTIONS

### LOW-PRO 300W

This 3.0 cu ft poly hopper comes standard with a 2" receiver mount. Additional mounts available include a utility mount, drop utility mount, and a 3-point mount.

**SPREADER TYPE:** Tailgate

**CAPACITY:** 3.0 cu ft

**MATERIAL APPLICATION:** Bagged Rock Salt

**SPREAD PATTERN:** Broadcast

**MOUNT OPTIONS:** Standard 2" Receiver, Optional Drop Utility, 3-Point Mounts



Shown with optional cover accessory.

# INCREASE YOUR **ICE CONTROL REACH.**

When it's time to touch up salt application or get into smaller areas larger hopper spreaders can't reach, you need a tailgate spreader you can count on. The all-new WESTERN® utility tailgate line does just that. The LOW-PRO 300 and 300G models spread a variety of bagged de-icing materials up to 25 feet, offering full-featured performance to get more jobs done faster.

## **VARIABLE SPEED CONTROL**

Allows the operator to adjust the spinner speed to manage spread width from inside the cab. The control is weather resistant and provides easy cab mounting.

## **ELECTRIC SPINNER MOTOR**

The spinner motor transmission is electric powered, drawing electricity from the vehicle for quiet, consistent operation. The motor is protected from the corrosive environment by a sealed drive enclosure.

## **VERTICAL AUGER**

The LOW-PRO 300 spreader features a heavy-duty 3" vertical auger for a steady, consistent flow of bagged rock salt to the spinner. This allows you to deliver a consistent spread of salt.

## **ELECTRIC GATE**

The LOW-PRO 300G spreader features an electric gate that stops and starts the material flow to the spinner. This allows the unit to spread finer granular materials in a consistent spread pattern.

## **LIGHT-DUTY HITCH MOUNT**

The light-duty hitch mount is standard and works with a variety of vehicles including work trucks, utility vehicles, and tractors.



## **LOW-PRO 300**

**SPREADER TYPE:** Tailgate

**CAPACITY:** 3.0 cu ft

**MATERIAL APPLICATION:** Bagged Rock Salt

**SPREAD PATTERN:** Broadcast

**MOUNT OPTIONS:** Standard 2" Light-Duty Hitch Mount

## **LOW-PRO 300G**

**SPREADER TYPE:** Tailgate

**CAPACITY:** 3.0 cu ft

**MATERIAL APPLICATION:** Fine De-Icing Material

**SPREAD PATTERN:** Broadcast

**MOUNT OPTIONS:** Standard 2" Light-Duty Hitch Mount

# CONTROL THE ICE WITH PRECISION.

When precision is needed with salt placement, the new line of stainless steel drop spreaders from Western Products is the answer. The Drop™ 250 and Drop™ 600 spreaders provide up to 36" of spread width in a drop pattern so the salt stays exactly where your vehicle drives. And with three mounting systems, these units can fit on most UTVs, compact tractors, or wheel loaders to make quick work of sidewalks, walking paths, and other paved surfaces where truck equipment can't easily gain access.

## VARIABLE-SPEED CONTROL

Enhanced speed control allows you to precisely match material delivery rate to the conditions. A single variable-speed control knob provides precise control of material flow rate.

## EASY MATERIAL LOADING AND PROTECTION

A hinged bag splitter easily pulls up to open bagged rock salt for easy loading. When not needed, the bag splitter can be folded down and out of the way. The salt is protected by a custom-molded polyethylene lid that is secured by rubber straps.

## FREE-FLOWING MATERIAL DELIVERY SYSTEM

The material delivery system has finger-like appendages that agitate the surrounding material with every revolution. This ensures a consistent amount of material flows into the spreader trough and, at the same time, keeps it from bridging.

## EASY CLEAN-OUT

The entire trough drops open for easy and fast material clean-out when the job is done. This allows you to store any leftover de-icing material in a dry, weather-resistant container until you need it for the next job.

## UP TO 36" SPREAD WIDTH WITH EASY-TO-ACTIVATE BAFFLES

A 36" spread width makes applications on sidewalks and walking paths easy. The WESTERN® Drop™ spreaders can treat these surfaces with one or two passes and limit damage to the grass or sensitive surfaces right next to the path. The spread width can be limited to 30" by activating 3" baffles on either side of the trough.

## ACCESSORIES

Strobe Lights | Work Lights | Vibrator Side Extensions (expands capacity to 4.0 cu ft or 8.0 cu ft)

Consult your local WESTERN dealer or [westernplows.com](http://westernplows.com) for accessory compatibility and availability.



## HITCH OPTIONS

3-Point Hitch | 2-inch Receiver | In-Bed

**SPREADER TYPE:** Tailgate

**CAPACITY:** 2.5 cu ft (Drop 250) or 6.0 cu ft (Drop 600)

**MATERIAL APPLICATION:** Bagged Rock Salt

**SPREAD PATTERN:** Drop

**MOUNT OPTIONS:** Standard 3-Point Hitch, 2" Hitch Receiver, or In-Bed Mount

Drop™ 250 & Drop™ 600



Shows with optional cover accessory.

# RB-400 ROTARY BROOM

## SWEEP IT CLEAN.

Wrap up sidewalks and paths in one clean sweep. The WESTERN® RB-400 walk-behind rotary broom is a combination sweeper/snowplow that sweeps and scrapes the sidewalk clean along buildings, curbs, and edging.

### STANDARD FEATURES

- Adjustable broom-rotation speed and adjustable down-pressure allow you to adapt to any condition.
- The floating, pivoting broom head gives you five angle settings to adjust the trajectory of the snow.
- Quick-attach plow blade features wheels and floating design to move heavy or deep snow.
- Features a seven-position handlebar height adjustment for operator comfort.
- Active-assist steering and freewheel design allow for 360-degree turning.
- The three-speed gear box provides the ideal operating speed, and the powered reverse function improves maneuverability and reduces operator fatigue.
- The unique brush-head design features angled outer bristles to clean close to buildings, curbs, and edging.

### ACCESSORIES

Debris Catcher | Multi-Purpose Bristles

Consult your local WESTERN dealer or [westernplows.com](http://westernplows.com) for accessory compatibility and availability.



## LEAVE NO JOB UNFINISHED.

WESTERN® walk-behind spreaders deliver professional, hassle-free performance. Constructed of sturdy, corrosion-free polyethylene, both the broadcast spreader and the drop spreader can handle most ice-melt materials. With pneumatic tires and a powder-coated steel frame, these spreaders are built to stand up to the demands of commercial use.

# WB-100B / WB-160D WALK-BEHINDS

### WB-100B BROADCAST SPREADER

The WB-100B poly broadcast spreader is ideal for wider areas, such as driveways, courtyards, and wide walkways. 100 lb capacity.



### WB-160D DROP-STYLE SPREADER

The WB-160D poly drop-style spreader is perfect for narrow walkways and keeping material out of adjacent landscape features. 160 lb capacity.



### STANDARD FEATURES

- Clear Hopper Cover
- Powder Coated Steel Frame
- 13" Pneumatic Tires
- Top Screen
- 10" Molded Spinner\*

\*On WB-100B only.



## STOP ICE IN YOUR TRACKS.

Apply liquid anti-icing before the storm to help prevent snow and ice from forming a bond with the pavement, making it easier to scrape clean down to the surface. The SS-120 walk-behind sidewalk sprayer helps you do just that. Spray anti-icing liquid before the storm and your sidewalks will come out cleaner than ever.

# SS-120 SIDEWALK SPRAYER



### CAPACITY

12-gallon poly tank with easy-fill cap.

### BATTERY-POWERED ELECTRIC PUMP

12-volt electric pump sprays up to one gallon per minute at 60 psi.

### HEIGHT-ADJUSTABLE NOZZLE

The height-adjustable nozzle sprays up to four feet wide.

### CONVENIENT SPRAY WAND

Use the convenient spray wand with 8' coil hose to treat stairs, entryways, and other hard-to-reach places. Features a spray distance of 15 feet.

## PUSH MORE PROFITS.

## PUSHER SHOVELS

Available in blade widths of 30" and 36", new WESTERN® heavy-duty pusher shovels are constructed with wear-resistant polyethylene and reinforced at the bracket and handle to withstand the demands of commercial fleets.

### STANDARD FEATURES

- The blade is constructed from ultra-high molecular weight polyethylene for superior strength and wear resistance.
- The D-shaped nylon handle improves operator grip when shoveling, season after season.
- A fiberglass pole is securely fastened to the blade with a reinforced triangular base and heavy-duty support bracket for added strength against heavy snow.




## BRING ON-SITE STORAGE CLOSE TO THE ACTION.

## STORAGE CONTAINERS

Increase the efficiency of your crews by bringing the storage of supplies, tools, and PPE closer to where they are used. Western Products helps the work get done faster with a full line of durable, weather-resistant, polyethylene storage containers. Four sizes—3, 6, 12, and 18 cu ft—are available to fit your storage footprint. Molded-in fork pockets on the 6, 12, and 18 cu ft models allow for easy placement, even when fully loaded, exactly where storage is needed. To protect the contents, each storage container has a molded-in closure that can be secured with an extended shank padlock.

### THESE VERSATILE CONTAINERS CAN BE USED FOR A VARIETY OF STORAGE APPLICATIONS:

- Rock Salt for Winter Cleanup
- PPE and Oil Dry for Shops and Maintenance Centers
- Bulk Item Storage for Manufacturing Facilities

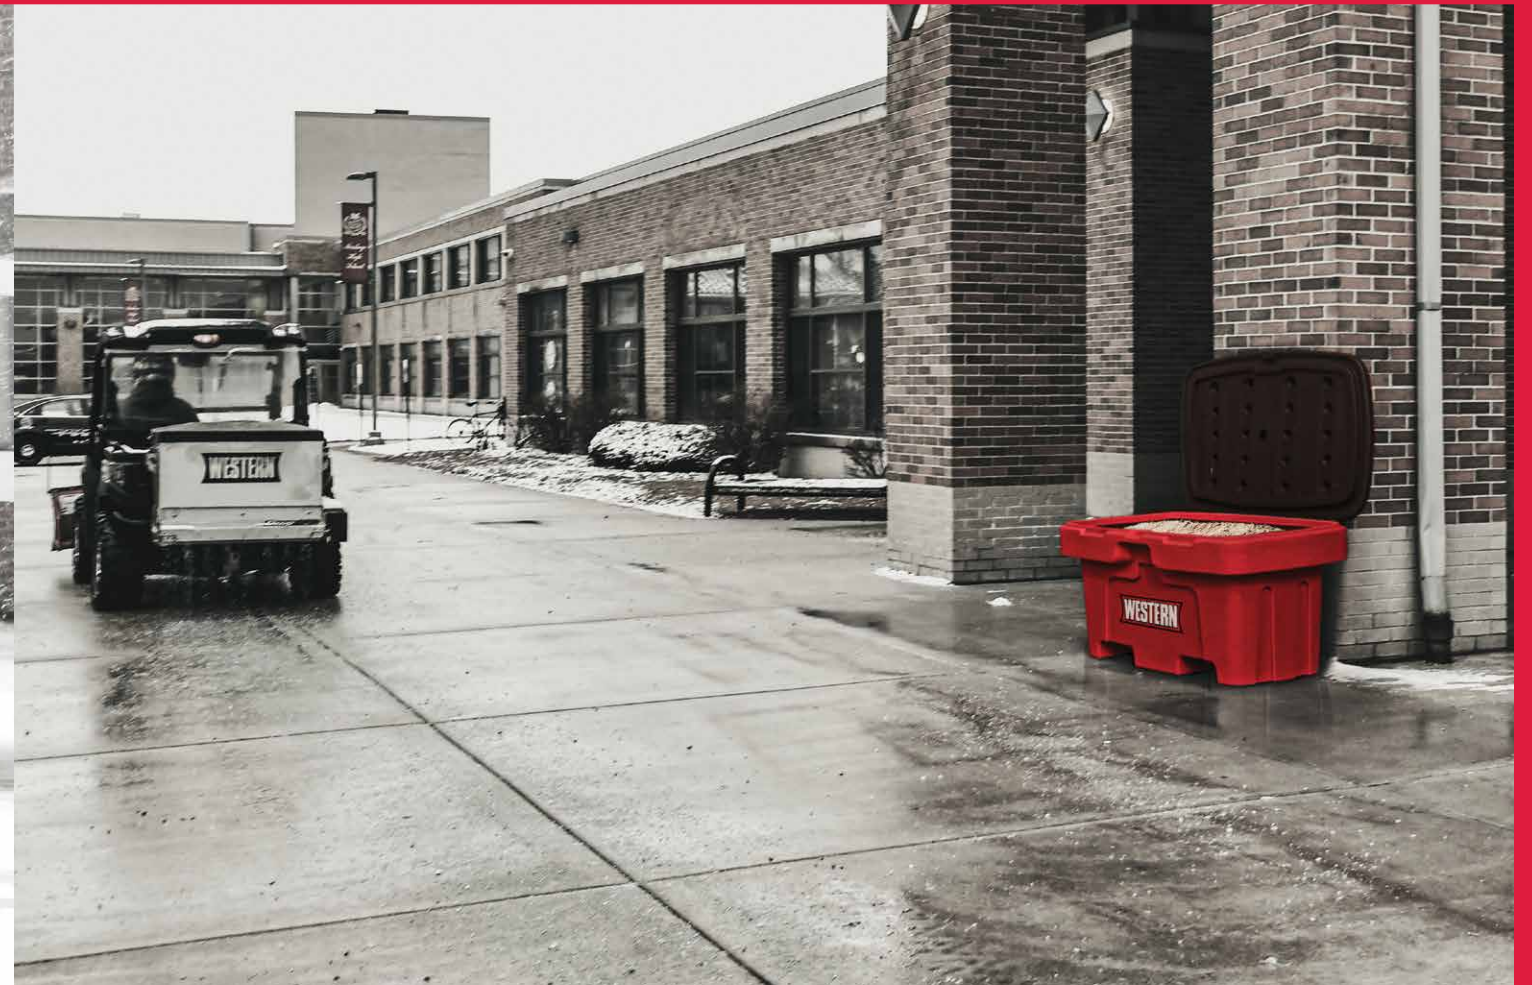



# PROTECT YOUR INVESTMENT WITH WESTERN® PARTS & ACCESSORIES.



Ensure your WESTERN snow removal equipment remains efficient and reliable season after season with Factory Original parts and accessories from your local WESTERN dealer. Using “will-fit” alternatives can alter your plow or spreader's performance and may affect your product warranty. Stick with the WESTERN brand for the parts and accessories you need. It's the smart choice for protecting your investment.

## PLOW ACCESSORIES



**RUBBER DEFLECTORS**  
Provide improved visibility by deflecting snow forward instead of onto your windshield.



**POLY CUTTING EDGES**  
Adjust to road surface irregularities without gouging and quickly remove all types of snow.



**HIGH-WEAR CUTTING EDGES**  
Increase wear resistance and restore your worn base angle to the proper geometry.



**SHOE KITS**  
Glide over gravel and dirt at the correct height and extend cutting edge and base angle life when plowing on rocky or abrasive surfaces. Kits vary by plow model.



**WING EXTENSION KITS**  
Made of 14-gauge steel with high strength steel ribs, the wings are a perfect complement to an IMPACT™ UTV V-plow blade. No installation required—the innovative design means quick and easy attach/detach.  
*For UTV V-plow*



**CURB GUARD KITS**  
Go right up to the edge with bolt-on curb guards. Protect the outer edge of your snowplow from wear when plowing along sidewalks and curbs. Made of cast metal, each curb guard effectively protects the outer edge of the plow.  
*For UTV straight blade*



**HIGH WEAR SKIS**  
High wear skis provide increased service life for extreme-use applications.  
*For 8' and 10' steel edge pusher plow models*



**TRACTOR PLOW LIGHTING HARNESS KIT**  
The lighting harness kit includes a switch and harness to be installed on the machine and will operate either LED or dual-halogen NIGHTHAWK™ headlamps.  
*\*Wiring only, headlamp kits sold separately*

## SPREADER ACCESSORIES



**SPILL GUARD KIT**  
Provides the loader with an improved line of sight to the hopper edges and prevents overflow and spill into the bed of the vehicle.  
*Fits Spreaders: 0.35 Striker™*



**LED WORK LIGHT KIT**  
For better visibility at the rear of the spreader at night.  
*Fits Spreaders: 0.35 Striker (shown), PRO-FLO™ 525, Drop™ 250, and Drop 600*



**LED STROBE LIGHT KIT**  
For safety during spreader operation.  
*Fits Spreaders: 0.35 Striker (shown), Drop 250, and Drop 600*



**INVERTED V**  
Helps reduce heavy startup loads on the drivetrain.  
*Fits Spreaders: 0.35 Striker*



**UTV SPREADER CONTROL SHIELD**  
A molded, plastic “visor” attaches to the top of the UTV spreader control to protect it from the rain or snow.  
*Fits Spreaders: 0.35 Striker (shown), PRO-FLO 525, Drop 250, and Drop 600*



**OPTIMUM FLOW KIT**  
Improves material flow and allows spreading of a 50/50 salt/sand mix with a vibrator and dual-pitch baffle.  
*Fit Spreaders: Tornado™ UTV*



**MATERIAL CONTROL TUBE**  
Helps prevent leaking issues when handling fine pellet and flake materials.  
*Fits Spreaders: Tornado UTV*



**TOP SCREEN**  
Helps break up large chunks of de-icing material during the loading process to help prevent clogging and bridging during spreader operation.  
*Fits Spreaders: Low Profile 500*



**ADJUSTABLE DEFLECTOR**  
Positionable deflector to redirect material onto roadway and away from your vehicle. Can be positioned in various directions.  
*Fits Spreaders: Low Profile 500*



**5-FLIGHT AUGER**  
Reduce spillage with a tighter corkscrew design with 5 turns over the same distance as the standard 3.  
*Fits Spreaders: Low Profile 500*



**CONTROL CUP HOLDER MOUNT**  
Designed to fit firmly into most size cup holders in your UTV.  
*Fits Spreaders: 0.35 Striker and Low Profile 500 (shown)*  
*This is also a plow accessory. Can be used with adapter plate for spreader (shown, right).*



**SPREADER CONTROL ADAPTER PLATE FOR CUP HOLDER MOUNT**  
Gain the flexibility and easy installation benefits of the cup holder control mount. Contains a durable metal mounting plate and hardware. Cup Holder Mount not included, order separately.  
*Fits Spreaders: 0.35 Striker (shown), PRO-FLO 525, and Low Profile 500*

# ACCESSORY COMPATIBILITY

## V-PLOW & WING PLOW BLADE

MODEL COMPATIBILITY	IMPACT™ V-PLOW 6'	PRODIGY™	WIDE-OUT™	MVP PLUS™ 8'6"	MVP 3™ 8'6"	MVP PLUS 9'6"	MVP 3 9'6"
1/2" STEEL CUTTING EDGE***		std	std	std	std	std	std
5/8" STEEL CUTTING EDGE			X	X	X	X	X
3/4" CARBIDE CUTTING EDGE				X	X	X	X
POLY CUTTING EDGE	X		X	X	X	X	X
BACK DRAG EDGE		X	X	X	X	X	X
BLADE STOP KIT	X			X	X	X	X
CURB GUARDS**	X			X	X	X	X
SECURITY KIT, LED HEADLIGHTS		X	X	X	X	X	X
CUP HOLDER CONTROL MOUNT	X	X	X	X	X	X	X
PRO GRIP MOUNT KIT	X	X	X	X	X	X	X
LIGHT BAR KIT	X						
DIELECTRIC GREASE	X	X	X	X	X	X	X
HYDRAULIC FLUID	X	X	X	X	X	X	X
HARNESS, UTV LONG (EXT. CAB)	X						
RUBBER DEFLECTOR	X	X	X	X	X	X	X
18" RUBBER DEFLECTOR					X		
SHOE KIT	X	X	X	X	X	X	X
EXTREME WEAR SHOE KIT					X		X
WING EXTENSION KIT	X			X	X	X	X

## PILE DRIVER™ WITH TRACE™ EDGE TECHNOLOGY PUSHER PLOW

MODEL COMPATIBILITY	8'	10'	12'
HIGH-WEAR SKI	X	X	X
BINDER KIT	X	X	X

\* MVP 3 blades cannot use plow shoes and back drag edges simultaneously  
 \*\* Curb guards cannot be used simultaneously with wing extension kits  
 \*\*\* 1/2" is standard for PRODIGY, PRO PLUS®, MVP PLUS, & WIDE-OUT; item sold as service part

## STRAIGHT BLADE

MODEL COMPATIBILITY	IMPACT™ MD	IMPACT HD	PRO-PLOW® SERIES 2 7'6"	PRO-PLOW SERIES 2 8'	PRO-PLOW SERIES 2 8'6"	PRO PLUS® 8'	PRO PLUS 8'6"	PRO PLUS 9'
CUTTING EDGE, EXTENDED WEAR	X							
CUTTING EDGE, POLY	X	X						
1/2" STEEL CUTTING EDGE***			X	X	X	std	std	std
DIELECTRIC GREASE	X	X	X	X	X	X	X	X
BACK DRAG EDGE			X	X	X	X	X	X
CURB GUARD**			X	X	X	X	X	X
CUP HOLDER CONTROL MOUNT	X	X	X	X	X	X	X	X
HYDRAULIC FLUID	X	X	X	X	X	X	X	X
HARNESS, UTV LONG (EXT. CAB)	X	X						
RUBBER DEFLECTOR	X	X	X	X	X	X	X	X
SHOE KIT	X	X	std	std	std	std	std	std
WING EXTENSION KIT						X	X	X

## HOPPER & TAILGATE

MODEL COMPATIBILITY	Striker™ 0.35 cu yd	Tornado™ 0.4 cu yd	300W WIRELESS TAILGATE	300G UTILITY TAILGATE	300 UTILITY TAILGATE	LP 500 TAILGATE	PRO-FLO™ 525 TAILGATE	DROP™ 250	DROP 600
INVERTED V	X								
EXTENSION COLLAR	X								
SPILL GUARD	X								
SIDE EXTENSIONS								X	X
TARP KIT	X								
UTV SPREADER CONTROL SHIELD	X								
SPREADER CONTROL ADAPTER FOR CUP HOLDER MOUNT	X								
OPTIMUM FLOW KIT		X							
AUGER TUBE RESTRICTOR KIT		X							
STROBE LIGHT KIT								X	X
WORK LIGHT KIT								X	X
MATERIAL CONTROL TUBE							X		
WEATHER COVER			X	std	std				
ADJUSTABLE DEFLECTOR KIT						X			
WORK LIGHT KIT (SINGLE)- FLEET FLEX SYSTEM							X		
PRIMARY WORK LIGHT						X			
VIBRATOR KIT	X							X	X
LED WORK LIGHT KIT	X							X	X

# MOUNT & MATERIAL COMPATIBILITY

## MOUNTS GUIDE

	PRO-FLO™ 525	PRO-FLO™ 900	LOW PROFILE 500	LOW-PRO 300W	LOW-PRO 300G	LOW-PRO 300
<b>TAILGATE SPREADER MOUNTS</b>						
RECEIVER HITCH MOUNT	std	x	std	std		
LIGHT-DUTY HITCH MOUNT					std	std
UTILITY MOUNT				x		
DROP UTILITY MOUNT				x		
TRAILER MOUNT				x		
3-POINT MOUNT	std	x		x		
PIVOT MOUNT		x				

\*Requires additional adapter  
std = Included standard with spreader  
x = Sold separately

## MATERIALS GUIDE

	0.35 Striker™ UTV	Tornado™ UTV	PRO-FLO 525	PRO-FLO 900	LOW PROFILE 500	LOW-PRO 300W	LOW-PRO 300G	LOW-PRO 300
<b>MATERIAL TYPE</b>		<b>UTV</b>		<b>TAILGATES</b>				
BAGGED ICE MELTERS		x*				x	x	
BAGGED ROCK SALT	x	x	x	x	x	x		x
BULK SALT	x	x	x	x				
CALCIUM FLAKES		x*			x*		x	
CALCIUM CHLORIDE PELLETS		x*			x*		x	
50/50 SALT/SAND MIX	x	x**						
SAND		x**						

NOTE: Assumes dry, free-flowing materials.  
\*May require use of material control tube accessory.  
\*\*May require use of optimum flow kit accessory.  
†May require 5-flight auger accessory.

	WB-100B	WB-160D
<b>MATERIAL TYPE</b>		
<b>WALK-BEHINDS</b>		
BAGGED ICE MELTERS	x	x
BAGGED ROCK SALT	x	x
BULK SALT	x	x
CALCIUM FLAKES	x	x
CALCIUM CHLORIDE PELLETS	x	x

	SS-120 SPRAYER	PRE-WET SYSTEM
<b>MATERIAL TYPE</b>		
<b>WALK-BEHIND</b>		
<b>ACCESSORY</b>		
BRINE	x	x
CALCIUM CHLORIDE SOLUTION	x	x
PREMIUM SOLUTIONS	x	x

Selecting the proper de-icing materials can vary by operator preference, experience and environmental considerations. Consult your local WESTERN® dealer with questions regarding material selection and availability.

# SPECIFICATIONS



## IMPACT™ HEAVY-DUTY

PLOW TYPE	UTV – V-PLOW	UTV – STRAIGHT
MOLDBOARD OPTIONS	Steel	Steel
BLADE WIDTH	6' (1.82 m)	6' (1.82 m)
BLADE HEIGHT	At Center: 25.75" (65.41 cm) At End: 29.25" (74.29 cm)	23.5" (59.69 cm)
BLADE THICKNESS	14 ga	14 ga
TRIP SPRINGS	2	2
RIBS	6	4
LIFT CYLINDER	1.5" x 6" (3.81 cm x 15.24 cm)	1.5" x 6" (3.81 cm x 15.24 cm)
ANGLING RAMS	1" x 8.75" (2.54 cm x 22.23 cm)	1" x 7" (2.54 cm x 17.78 cm)
PLOWING WIDTH* (FULL ANGLE)	Full Angle: 5' (1.52 m) Scoop: 4'7" (1.37 m) Full V: 5' (1.52 m)	5'4" (1.62 m)
APPROX. WEIGHT**	354 lb (160.57 kg)	261 lb (118.38 kg)
CUTTING EDGE	0.25" x 5" (0.64 cm x 12.70 cm)	0.25" x 5" (0.64 cm x 12.70 cm)
MOUNT TYPE	UTV Mounting System; Tractor Mount Kits	UTV Mounting System; Tractor Mount Kits

\*IMPACT UTV V-Plow: For UTVs with a wider wheelbase, width can be adjusted to: 5'6" (1.68 m) full angle, 5'1" (1.55 m) scoop, 5'6" (1.68 m) full V  
\*\*Plus vehicle mount

## IMPACT MID-DUTY

PLOW TYPE	STRAIGHT BLADE
MOLDBOARD OPTIONS	High-Strength Steel
BLADE WIDTH	Hydraulic: 5'6" (1.68 m)   6' (1.82 m) Winch: 5'6" (1.68 m)   6' (1.82 m)
BLADE HEIGHT	19.67" (49.96 cm)
BLADE THICKNESS	16 ga
TRIP SPRINGS	2
RIBS	4
LIFT CYLINDER	Hydraulic: 1.5" x 3" (one) (3.81 cm x 7.62 cm) Winch: NA
ANGLING RAMS	Hydraulic: 1.5" x 4" (one) (3.81 cm x 10.16 cm) Winch: NA
PLOWING WIDTH	Hydraulic: 4'11" (1.50 m)   5'4" (1.63 m) Winch: 4'11" (1.50 m)   5'4" (1.63 m)
APPROX. WEIGHT*	Hydraulic: 190 lb (86.18 kg)   195 lb (88.45 kg) Winch: 175 lb (79.38 kg)   180 lb (81.65 kg)
CUTTING EDGE	0.25" x 4" (0.64 cm x 10.16 cm)
MOUNT TYPE	Mid-Duty UTV Mounting System

\*Weight of the vehicle mount not included

Specifications subject to change without prior notice.  
Please visit [westernplows.com](http://westernplows.com) for the most current specifications.

# SPECIFICATIONS



PRO PLUS®

PRO-PLOW®  
SERIES 2

PLOW TYPE	TRACTOR	TRACTOR	TRACTOR	TRACTOR
<b>MOLDBOARD OPTIONS</b>	Steel	Steel	Steel	Steel/Poly
<b>BLADE WIDTH</b>	8' (2.44 m)	8'6" (2.59 m)	9' (2.74 m)	7'6" (2.29 m)
<b>BLADE HEIGHT</b>	31.5" (80.01 cm)	31.5" (80.01 cm)	31.5" (80.01 cm)	29" (73.66 cm)
<b>BLADE THICKNESS</b>	12 ga	12 ga	12 ga	Steel: 11 ga Poly: 0.375" (9.53 mm)
<b>SHOCK ABSORBERS</b>	2	2	2	1
<b>TRIP SPRINGS</b>	4	4	4	4
<b>RIBS</b>	8	8	8	7
<b>LIFT CYLINDER</b>	1.5" x 8" (3.81 cm x 20.32 cm)	1.5" x 8" (3.81 cm x 20.32 cm)	1.5" x 8" (3.81 cm x 20.32 cm)	1.5" x 8" (3.81 cm x 20.32 cm)
<b>ANGLING RAMS</b>	1.5" x 12" (3.81 cm x 30.48 cm)	1.5" x 12" (3.81 cm x 30.48 cm)	1.5" x 12" (3.81 cm x 30.48 cm)	1.5" x 10" (3.81 cm x 25.40 cm)
<b>PLOWING WIDTH (FULL ANGLE)</b>	6'11" (2.11 m)	7'4" (2.24 m)	7'9" (2.36 m)	6'6" (1.98 m)
<b>APPROX. WEIGHT*</b>	805 lb (365.14 kg)	821 lb (372.40 kg)	837 lb (379.66 kg)	Steel: 653 lb (296.20 kg) Poly: 677 lb (307.08 kg)
<b>CUTTING EDGE</b>	0.5" x 6" (1.27 cm x 15.24 cm)	0.5" x 6" (1.27 cm x 15.24 cm)	0.5" x 6" (1.27 cm x 15.24 cm)	0.375" x 6" (0.95 cm x 15.24 cm)
<b>MOUNT TYPE</b>	UltraMount® 2	UltraMount 2	UltraMount 2	UltraMount 2



MVP 3™



ENFORCER™

WIDE-OUT™

PLOW TYPE	TRACTOR	TRACTOR	TRACTOR	TRACTOR
<b>MOLDBOARD OPTIONS</b>	Steel/Stainless/Poly	Steel/Stainless/Poly	Steel/Stainless	Steel
<b>BLADE WIDTH</b>	8'6" (2.59 m)	9'6" (2.90 m)	7'6" (2.29 m)	Retracted: 8' (2.44 m) Expanded: 10' (3.05 m) Scoop: 8'10" (2.69 m)
<b>BLADE HEIGHT</b>	At Center: 31" (78.74 cm) At End: 38" (96.52 cm)	At Center: 31" (78.74 cm) At End: 39" (99.06 cm)	At Center: 27" (68.58 cm) At End: 33" (83.82 cm)	At Center: 31" (78.74 cm) At End: 35" (88.90 cm)
<b>BLADE THICKNESS</b>	Steel: 14 ga Poly: 0.25" (6.35 mm)	Steel: 14 ga Poly: 0.25" (6.35 mm)	14 ga	14 ga
<b>SHOCK ABSORBERS</b>	—	—	—	Optional
<b>TRIP SPRINGS</b>	4	6	2	4
<b>RIBS</b>	8	8	6	6
<b>LIFT CYLINDER</b>	1.75" x 8" (4.45 cm x 20.32 cm)	1.75" x 8" (4.45 cm x 20.32 cm)	1.25" x 8.625" (3.18 cm x 21.91 cm)	1.75" x 8" (4.45 cm x 20.32 cm)
<b>ANGLING RAMS</b>	1.75" x 11" (4.45 cm x 27.94 cm)	1.75" x 11" (4.45 cm x 27.94 cm)	1.5" x 12" (3.81 cm x 30.48 cm)	1.5" x 10" (3.81 cm x 25.40 cm)
<b>PLOWING WIDTH (FULL ANGLE)</b>	Full Angle: 7'5" (2.26 m) Scoop: 7'2" (2.18 m) Full V: 7'8" (2.34 m)	Full Angle: 8'6" (2.59 m) Scoop: 8'2" (2.49 m) Full V: 8'7" (2.62 m)	Full Angle: 6'7" (2.01 m) Scoop: 6'5" (1.96 m) Full V: 6'9" (2.06 m)	Retracted: 7'2" (2.18 m) Expanded: 9' (2.74 m) Scoop: 7'11" (2.41 m)
<b>APPROX. WEIGHT*</b>	Steel: 940 lb (426.38 kg) Poly: 890 lb (403.70 kg)	Steel: 1022 lb (463.57 kg) Poly: 972 lb (440.89 kg)	Steel: 553 lb (250.84 kg) Stainless: 508 lb (230.42 kg)	1020 lb (462.66 kg)
<b>CUTTING EDGE</b>	0.375" x 6" (0.95 cm x 15.24 cm) Optional: 0.5" x 6" (1.27 cm x 15.24 cm)	0.5" x 6" (1.27 cm x 15.24 cm)	0.375" x 6" (0.95 cm x 15.24 cm)	0.5" x 6" (1.27 cm x 15.24 cm)
<b>MOUNT TYPE</b>	UltraMount® 2	UltraMount 2	UltraMount 2	UltraMount 2

# SPECIFICATIONS

## PRODIGY™

## PRO PLUS®



PLOW TYPE	SKID-STEER   TRACTOR	SKID-STEER   TRACTOR	SKID-STEER	SKID-STEER
<b>MOLDBOARD OPTIONS</b>	Steel	Steel	Steel	Steel
<b>BLADE WIDTH</b>	Scoop: 8'7" (2.62 m) Wings Pinned: 9'8" (2.95 m)	8' (2.44 m)	8'6" (2.59 m)	9' (2.74 m)
<b>BLADE HEIGHT</b>	29.5" (74.93 cm)	31.5" (80.01 cm)	31.5" (80.01 cm)	31.5" (80.01 cm)
<b>BLADE THICKNESS</b>	12 ga	12 ga	12 ga	12 ga
<b>SHOCK ABSORBERS</b>	Optional	2	2	2
<b>TRIP SPRINGS</b>	4	4	4	4
<b>RIBS</b>	8	8	8	8
<b>ANGLING RAMS</b>	1.5" x 10" (3.81 cm x 25.40 cm)	1.5" x 12" (3.81 cm x 30.48 cm)	1.5" x 12" (3.81 cm x 30.48 cm)	1.5" x 12" (3.81 cm x 30.48 cm)
<b>PLOWING WIDTH (FULL ANGLE)</b>	7'10" (2.39 m)	6'11" (2.11 m)	7'4" (2.24 m)	7'9" (2.36 m)
<b>CUTTING EDGE</b>	0.5" x 6" (1.27 cm x 15.24 cm)	0.5" x 6" (1.27 cm x 15.24 cm)	0.5" x 6" (1.27 cm x 15.24 cm)	0.5" x 6" (1.27 cm x 15.24 cm)
<b>MOUNT TYPE</b>	Oscillating Skid-Steer Mounting Plate; Tractor Mount Kit	Oscillating Skid-Steer Mounting Plate; Tractor Mount Kit	Oscillating Skid-Steer Mounting Plate	Oscillating Skid-Steer Mounting Plate

## PILE DRIVER™



PLOW TYPE	PUSHER PLOW	PUSHER PLOW	PUSHER PLOW	PUSHER PLOW	PUSHER PLOW
<b>BLADE WIDTH</b>	8' (2.44 m)	10' (3.05 m)	8' (2.44 m)	10' (3.05 m)	12' (3.66 m)
<b>BLADE HEIGHT</b>	30" (76.20 cm)	30" (76.20 cm)	36" (91.44 cm)	36" (91.44 cm)	42" (106.68 cm)
<b>SIDE PLATE WIDTH</b>	56" (142.24 cm)	56" (142.24 cm)	56" (142.24 cm)	56" (142.24 cm)	56" (142.24 cm)
<b>SIDE PLATE HEIGHT</b>	30" (76.20 cm)	30" (76.20 cm)	36" (91.44 cm)	36" (91.44 cm)	42" (106.68 cm)
<b>MOLDBOARD RADIUS</b>	27" (68.58 cm)	27" (68.58 cm)	27" (68.58 cm)	27" (68.58 cm)	46" (116.84 cm)
<b>CUTTING EDGE TECHNOLOGY</b>	TRACE™ — Terrain Response Advanced Cutting Edge				
<b>CUTTING EDGE MATERIAL</b>	High-carbon steel with carbide inserts				
<b>APPROX. SNOW CAPACITY</b>	75 cu ft (2.12 cu m)	94 cu ft (2.66 cu m)	108 cu ft (3.06 cu m)	135 cu ft (3.82 cu m)	219 cu ft (6.20 cu m)
<b>APPROX. WEIGHT</b>	2127 lb (964.79 kg)	2249 lb (1020.13 kg)	2221 lb (1007.43 kg)	2377 lb (1078.19 kg)	2644 lb (1199.30 kg)
<b>MOUNT TYPE</b>	Skid-Steer Attach Plate	Skid-Steer Attach Plate	Skid-Steer Attach Plate / Coupler	Skid-Steer Attach Plate / Coupler	Coupler
<b>MACHINE APPLICATION</b>	Skid-Steer	Skid-Steer	Tractor / Wheel Loader	Tractor / Wheel Loader	Wheel Loader
<b>VEHICLE HORSEPOWER COMPATIBILITY</b>	30–50 hp	30–50 hp	—	—	—
<b>WHEEL LOADER HORSEPOWER COMPATIBILITY</b>	—	—	50–75 hp	50–75 hp	100–125 hp
<b>TRACTOR HORSEPOWER COMPATIBILITY</b>	—	—	50–100 hp	50–100 hp	75–150 hp



0.35 Striker™



Tornado™ UTV

SPREADER TYPE	UTV	UTV
<b>BODY SIDE LENGTH</b>	30" (0.76 m)	64" (1.62 m)
<b>CAPACITY</b>	0.35 cu yd (0.27 cu m)	11.00 cu ft (0.31 cu m)
<b>HOPPER CONSTRUCTION</b>	16 ga SS	Polyethylene
<b>DIMENSIONS OVERALL</b>	57" x 38" x 46" (144.78 cm x 96.52 cm x 116.84 cm)	64" x 48.5" x 41.5" (162.56 cm x 123.19 cm x 105.41 cm)
<b>APPROX. WEIGHT (EMPTY)</b>	235 lb (106.59 kg)	280 lb (127.01 kg)
<b>MOTORS</b>	Dual Electric, 12V DC, Sealed	Dual Electric, 12V DC, Sealed
<b>SPINNER SIZE</b>	12" (30.48 cm)	12" (30.48 cm)
<b>SPREADING WIDTH</b>	Up to 30' (9.14 m)	Up to 30' (9.14 m)
<b>VEHICLE APPLICATION</b>	UTVs	UTVs



PRO-FLO™ 525

PRO-FLO™ 900

LOW PROFILE

SPREADER TYPE	TAILGATE	TAILGATE	
<b>MODEL</b>	525	900	500
<b>CAPACITY</b>	5.25 cu ft (0.15 cu m)	9.00 cu ft (0.25 cu m)	5.00 cu ft (0.14 cu m)
<b>HOPPER CONSTRUCTION</b>	Polyethylene	Polyethylene	Polyethylene
<b>DIMENSIONS OVERALL</b>	20.5" x 38" x 34" (52.07 cm x 96.52 cm x 86.36 cm)	24" x 52" x 36" (60.96 cm x 132.08 cm x 91.44 cm)	21" x 39" x 34" (53.34 cm x 99.06 cm x 86.36 cm)
<b>APPROX. WEIGHT (EMPTY)</b>	160 lb with mount (72.57 kg)	180 lb Without Mount (81.65 kg)	75 lb with mount (34.02 kg)
<b>MOTOR</b>	Dual Electric, 12V, 1/3 hp	Dual Electric, 12V, 1/3 hp	Electric, 12V, 1/3 hp
<b>AUGER (DIA. x LENGTH)</b>	3" x 14" Heavy-Duty Solid Steel (7.62 cm x 35.56 cm)	3" x 20" Heavy-Duty Solid Steel (7.62 cm x 50.80 cm)	2.63" x 6" (6.68 cm x 15.24 cm)
<b>SPINNER SIZE</b>	10" (25.40 cm)	12" (30.48 cm)	10" (25.40 cm)
<b>SPREADING WIDTH</b>	Up to 30' (9.14 m)	Up to 40' (12.19 m)	Up to 30' (9.14 m)
<b>VEHICLE APPLICATION</b>	Tractors, SUVs, 1-Ton, or Smaller Pickups	Tractors, 1-Ton or Smaller Pickups	Vehicles with Class III Hitch
<b>AVAILABLE MOUNTS</b>	Standard 2" Receiver, 3-Point Combo Mount	Pivot Mount, 2" Receiver Hitch (Requires Adapter Mount), 3-Point Hitch Mount*	Standard Class III 2" Receiver Hitch Mount

# SPECIFICATIONS



## LOW-PRO 300W

## LOW-PRO 300G

## LOW-PRO 300

SPREADER TYPE	TAILGATE	TAILGATE	TAILGATE
<b>MODEL</b>	300W	300G	300
<b>CAPACITY</b>	3.00 cu ft (0.08 cu m)	3.00 cu ft (0.08 cu m)	3.00 cu ft (0.08 cu m)
<b>HOPPER CONSTRUCTION</b>	Polyethylene	Polyethylene	Polyethylene
<b>DIMENSIONS OVERALL</b>	22" x 30" x 32" (55.88 cm x 76.20 cm x 81.28 cm)	22" x 30" x 30" (55.88 cm x 76.20 cm x 76.20 cm)	22" x 32" x 30" (55.88 cm x 81.28 cm x 76.20 cm)
<b>APPROX. WEIGHT (EMPTY)</b>	68 lb with mount (30.84 kg)	75 lb with mount (34.02 kg)	68 lb with mount (30.84 kg)
<b>MOTOR</b>	Electric, 12V, 1/3 hp	12-volt DC motor mounted in weather-resistant enclosure	12-volt DC motor mounted in weather-resistant enclosure
<b>AUGER (DIA. x LENGTH)</b>	2.5" x 5.75" Vertical High-Flow (6.35 cm x 14.61 cm)	—	3" Vertical High-Flow (7.62 cm)
<b>SPINNER SIZE</b>	10" (25.40 cm)	10" (25.40 cm)	10" (25.40 cm)
<b>SPREADING WIDTH</b>	Up to 25' (7.62 m)	Up to 20' (6.09 m)	Up to 25' (7.62 m)
<b>VEHICLE APPLICATION</b>	Tractors, UTVs, SUVs, 1-Ton, or Smaller Pickups	UTVs, Tractors, 1-Ton, or Smaller Pickups	UTVs, Tractors, 1-Ton, or Smaller Pickups
<b>AVAILABLE MOUNTS</b>	Standard 2" Receiver, Optional Utility Mount, Drop Utility Mount, 3-Point Mount	Standard 2" Light-Duty Hitch Mount	Standard 2" Light-Duty Hitch Mount



## STORAGE CONTAINERS

	STORAGE	STORAGE	STORAGE	STORAGE
<b>MODEL NUMBER</b>	74069	74071	74073	74075
<b>MATERIAL CAPACITY</b>	3 cu ft (0.08 cu m)	6 cu ft (0.17 cu m)	12 cu ft (0.34 cu m)	18 cu ft (0.51 cu m)
<b>EMPTY WEIGHT</b>	19 lb (8.62 kg)	35.5 lb (16.10 kg)	50.5 lb (22.1 kg)	58 lb (26.31 kg)
<b>OVERALL LENGTH</b>	33" (83.2 cm)	48" (121.92 cm)	48" (121.92 cm)	48" (121.92 cm)
<b>OVERALL WIDTH</b>	22.75" (57.79 cm)	33.25" (84.46 cm)	33.25" (84.46 cm)	33.25" (84.46 cm)
<b>OVERALL HEIGHT</b>	17.4" (44.19 cm)	20.75" (52.71 cm)	27.75" (70.49 cm)	35.75" (90.81 cm)
<b>FORK POCKETS</b>	No	Yes	Yes	Yes



## DROP™ 250 DROP™ 600

SPREADER TYPE	TAILGATE	TAILGATE
<b>MODEL</b>	250	600
<b>APPROX. WEIGHT (EMPTY)</b>	130 lb (58.97 kg)	160 lb (72.57 kg)
<b>OVERALL LENGTH</b>	17" (43.18 cm)	20" (50.80 cm)
<b>OVERALL HEIGHT</b>	17.5" (44.45 cm)	28" (71.12 cm)
<b>OVERALL WIDTH</b>	42" (106.68 cm)	42" (106.68 cm)
<b>HOPPER LENGTH</b>	13" (33.02 cm)	17" (43.18 cm)
<b>HOPPER WIDTH</b>	36.5" (92.71 cm)	36.5" (92.71 cm)
<b>CAPACITY (VOLUME)</b>	2.5 cu ft (0.07 cu m)	6.0 cu ft (0.17 cu m)
<b>CAPACITY (WEIGHT)</b>	350 lb (158.76 kg)	650 lb (294.84 kg)
<b>SPREADING WIDTH</b>	30"–36" (76.20 cm–91.44 cm)	30"–36" (76.20 cm–91.44 cm)
<b>FRAME</b>	201 SS	201 SS
<b>HOPPER</b>	201 SS	201 SS
<b>MOTORS</b>	1/3 hp	1/3 hp
<b>AUGER DRIVE ASSEMBLY</b>	201 SS	201 SS
<b>MOUNTING</b>	3-pt Hitch, 2" Hitch Receiver, or In-Bed Mount	3-pt Hitch, 2" Hitch Receiver, or In-Bed Mount

SS = Stainless Steel  
MS = Mild Steel



## WB-160D WB-100B

SPREADER TYPE	DROP	BROADCAST
<b>CAPACITY</b>	160 lb (72.57 kg)	100 lb (45.36 kg)
<b>HOPPER CONSTRUCTION</b>	Polyethylene	Polyethylene
<b>DIMENSIONS OVERALL</b>	48" x 38.25" x 36" (121.92 cm x 97.16 cm x 91.4 cm)	50" x 26" x 28" (127.00 cm x 66.04 cm x 71.12 cm)
<b>APPROX. WEIGHT (EMPTY)</b>	55 lb (24.95 kg)	25 lb (11.34 kg)
<b>SPINNER SIZE</b>	—	10" (25.40 cm)
<b>SPREADING WIDTH</b>	3' (0.91 m)	Up to 20' (6.09 m)



## RB-400

PLOW TYPE	WALK-BEHIND ROTARY BROOM
<b>EMPTY WEIGHT</b>	238 lb (107.96 kg)
<b>OVERALL DIMENSIONS (L x W x H)</b>	Without Blade: 72" x 40" x 42.5" (182.88 cm x 101.60 cm x 107.95 cm) With Blade: 80" x 40" x 42.5" (203.20 cm x 101.60 cm x 107.95 cm)
<b>SPEED</b>	Up to 2.7 mph (4.3 km/h)
<b>FORWARD GEARS</b>	3
<b>REVERSE GEARS</b>	1
<b>BRUSH PRESSURE ADJUSTMENT</b>	Yes
<b>ADJUSTABLE HANDLE HEIGHT</b>	7 Positions
<b>ENGINE</b>	Honda® GXV 160 OHV
<b>TIRES</b>	Polar Trec Snow Tires
<b>SNOW BLADE WIDTH</b>	Wide: 40" (101.60 cm) Angled: 37" (93.98 cm)
<b>BRUSH DIAMETER</b>	16" (40.64 cm)
<b>BRUSH WIDTH</b>	40" (101.60 cm)
<b>FUEL CAPACITY</b>	0.5 gal (1.89 L)



## SS-120

SPREADER TYPE	SPRAYER
<b>MODEL</b>	SS-120
<b>EMPTY WEIGHT</b>	60 lb (27.22 kg)
<b>DIMENSIONS OVERALL</b>	48" x 28" x 33" (121.92 cm x 71.12 cm x 83.82 cm)
<b>CAPACITY</b>	12 gal (45.42 L)
<b>SPRAYING WIDTH</b>	Up to 48" (121.92 cm)
<b>SPRAYING VOLUME</b>	1 gal/min (3.79 L/min)
<b>FRAME</b>	Powder Coated Steel
<b>TANK</b>	One-Piece LLDPE
<b>MOTORS</b>	12-Volt, Direct-Drive Pump



**TWO WINTER  WARRANTY**

Western Products | P.O. Box 245038 | Milwaukee, WI 53224-9538

[westernplows.com](http://westernplows.com)



Western Products reserves the right under its product improvement policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used. Western Products or the vehicle manufacturer may require or recommend optional equipment for snow removal. Do not exceed vehicle ratings with a snowplow or spreader. This product is manufactured under the following US patents: 7,134,227; 7,400,058; 7,540,436; 8,850,724; 9,200,418; 9,033,265; 9,271,441; 9,822,563; 10,793,056; CAN patents: 2,466,195; 2,843,990; and other patents pending. Western Products offers a limited warranty for all snowplows and accessories. See separately printed page for this important information. The following are registered (®) or unregistered (™) trademarks of Douglas Dynamics, LLC: CONTRACTOR GRADE®, Drop™, ENFORCER™, IMPACT™, MVP 3™, MVP PLUS™, NIGHTHAWK™, PILE DRIVER™, PRO-FLO™ 525, PRO-FLO™ 900, PRO-PLOW® Series 2, PRO PLUS®, PRODIGY™, Striker™, Sway-Frame™, Tornado™, TRACE™, UltraMount® 2, WESTERN®, and WIDE-OUT™.

©2023 Douglas Dynamics, LLC  
All rights reserved.

 A DIVISION OF DOUGLAS DYNAMICS, LLC

Printed in U.S.A.  
Form No. 79311 - JAN23