



# MARATHON

TELESCOPIC HOIST

- *To 47-Ton Capacity.*
- *Maintenance free cylinder pivots.*
- *Trunnion mount provides solid stability.*
- *Hard chrome-plated cylinder surface.*



[www.CRYSTEEL.com](http://www.CRYSTEEL.com)





# CRYSTEEL'S MARATHON PROVIDES **POWER, PERFORMANCE, AND ENDURANCE**

The Marathon Telescopic Hoist offers powerful lifting action while minimizing wasted doghouse space for maximum hauling capacity. Plus, because the Marathon is trunnion-mounted, its stability is unmatched by conventional top pinned telescopic hoists.

Smooth acting final stages finish the job to a minimum 50° dump angle. High pressure maintenance-free twin

lip seals never need adjusting. Built-in wipers keep the cylinder surface and seals clean and free of dirt, grit, and dust build-up.

## **FLOATING CRADLE**

Crysteel's Floating Cradle is designed to reduce the bending stress levels between the truck frame and dump body frame that occur when a truck is

traveling over uneven terrain.



The Floating Cradle allows the hoist cylinder to pivot up to 2.5 degrees side to side reducing this bending tension. The Crysteel Floating Cradle is specially designed for haulers that move in and out of construction and demolition sites, gravel pits, and mining operations.

The Floating Cradle is used on the M63138, M63153, and M63117 models.

## **EXCELLENT STABILITY**

Because the Marathon's body and truck pivots are only a few inches apart, and because the Marathon lifts directly from the body's longitudinals, body twist and leaning are minimized for excellent stability.

## **COMPREHENSIVE 5-YEAR WARRANTY**

Crysteel Manufacturing's Customer Satisfaction Pledge is designed to be the most comprehensive warranty in the truck equipment industry. This pledge covers new products for a period of five (5) years, and is not restricted by vehicle mileage. Complete details available at [www.crysteel.com](http://www.crysteel.com).



**Crysteel Marathon's ingenious body mount lifts directly on the longbeams for efficient power delivery and superior stability, throughout the dump cycle.**




# Quality Performance Features

- Cylinder pivots on maintenance-free, greaseless composite Teflon® bearings.
- Reinforced lower cylinder tube and full-width angle hinge help ensure stability.
- Single-lever locking shifter with sealed cable.
- Reservoirs have sight gauge for easy visual inspection.



# Optional Features

- Double-acting cylinders.
- Air shift control.
- Remote-mount bracket with drive-line kit for pump.
- Remote-mount valve with power beyond capabilities.
- Full-length subframe.
- Removable pin and/or composite bearing rear hinges.
- Remote underbody stabilizer.
- Less hydraulics.
- Return line filter kit.
- “Body up” indicator light kit.

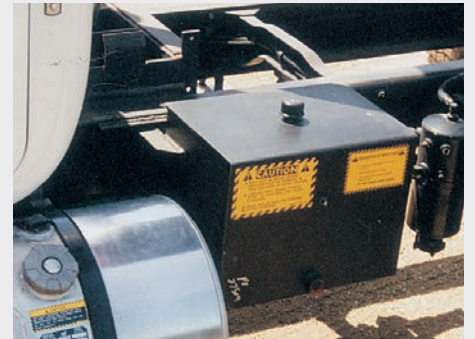

## HIGH PERFORMANCE CRYSTEEL HYDRAULICS

- Oversized hydraulic hoses keep cycle time fast.
- O-ring ports keep connections leak-free for years of trouble-free service.
- Direct-mount gear pump/valve combination for easy installation.
- Large seals and wipers seal out grit and never need adjusting.
- 2500 psi-rated cylinders match up easily with your central hydraulic system.



# MARATHON TELESCOPIC HOIST

## MARATHON HOIST SPECIFICATIONS

	M5390	M5399	M53117	M63117	M63138	M63153
NTEA Performance Class	70	70	80	120	120	120
Number of Stages	3	3	3	3	3	3
Active Stage Sizes (in.)	5,4,3	5,4,3	5,4,3	6,5,4	6,5,4	6,5,4
Total Stroke (in.)	90	99	117	117	138	153
Cylinder Rated Pressure (PSI)	2500	2500	2500	2500	2500	2500
Cylinder Style	Inverted	Inverted	Inverted	Inverted	Inverted	Inverted
Std. Pump GMP @ 1000 RPM	20	20	20	20	20	20
Std. Reservoir Type	Outside Frame	Outside Frame	Outside Frame	Outside Frame	Outside Frame	Outside Frame
Std. Reservoir Size (gal.)	16	16	23	23	28	28
Recommended Body Length (ft.)	9-10.5	11-11.5	12-13.5	12-13.5	14-15.5	16-16.5
Floor Height (inches)	8	8	8	8	8	8
Approximate Weight (lbs.)	650	690	780	820	890	950

## MARATHON HOIST LOAD CAPACITY IN TONS \*

Marathon Model	NTEA Class	Body Length (ft.)							
		9	10	11	12	13	14	15	16
M5390	70	36.8	29.8						
M5399	70			27.5					
M53117	80				28.3	24.9			
M63117	120				49.3	44.1			
M63138	120						46.4	42.0	
M63153	120								41.8

Specifications subject to change.

\*Capacities based on water-level load, 12' overhang, 50° dump angle, and includes body weight.

CAUTION: The combined weights of truck, body, hoist and load must not exceed the truck's Gross Vehicle Weight rating.



### CRYSTEEL MANUFACTURING, INC.

Lake Crystal, MN • 1-800-533-0494 • FAX 507-726-2559  
www.crysteel.com • E-mail crysteel@tbei.com



**Sold by:**

Crysteel's Customer Satisfaction Pledge is designed to be the most comprehensive warranty in the truck equipment industry. This pledge covers new products for a period of five (5) years, and is not restricted by vehicle mileage, and begins when the final customer puts our product into service.

This warranty covers our products for defective material and/or workmanship at a rate of 100% for the first (3) years and at a rate of 50% for years 4 and 5.

For more information on Crysteel's 5 Year Warranty, please visit us at [www.crysteel.com](http://www.crysteel.com).

