



## HD 5.0/50 Eb Cage

This cold water electric pressure washer in a roll cage design is built for durability and power. These industrial-strength machines deliver up to 5.0 GPM at 5,000 PSI.

## HD 5.0/50 Eb Cage

### Technical data

Order no.		1.107-084.0
EAN code		4039784453821
Current type	Ph / V / Hz	3 / 230 / 60
Working pressure	PSI	5000

### Equipment

ANTI!Twist	-
Pressure switch-off	-
Servo control	-

# HD 5.0/50 EB CAGE

## 1.107-084.0



		Order no.	Max. working pressure	Length		Price	Description	
<b>Rotating spray lances</b>								
Spray lance	1	4.760-660.0	300 bar	1050 mm			1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	■
	2	4.760-664.0	300 bar	600 mm			600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
	3	4.760-663.0	300 bar	840 mm			850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
	4	4.760-661.0	300 bar	1550 mm			1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
	5	4.760-662.0	300 bar	2050 mm			2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	□
<b>Spray lance</b>								
250 mm lance, non-rotatable	6	4.760-667.0		250 mm			250 mm stainless steel lance. With manual coupling. Non-rotatable.	□
<b>Flexible spray lance</b>								
High pressure articulated joint	7	4.481-039.0	300 bar				High-pressure articulated joint: Thanks to infinite angle adjustment up to 120°, this tool is ideal to effortlessly clean hard-to-reach areas. Simply attach to the spray lance of the pressure washer.	□

■ Included in the scope of supply. □ Available accessories.

# HD 5.0/50 EB CAGE

## 1.107-084.0



		Order no.	Flow rate				Price	Description	
<b>Trigger guns</b>									
High-end HP trigger gun	1	4.775-823.0						High-end spray guns with optimised flow. Small pressure losses also with water volumes up to 2500 l/h. Robustness and durability for professional use. Food-safe and saltwater-resistant materials offer the best conditions for use in the food sector and in industry. Connector for HP hoses M 22 x 1.5.	<input type="checkbox"/>
<b>Quick connect</b>									
Quick coupling	2	6.401-458.0						For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 x 1.5 internal thread.	<input type="checkbox"/>
Male coupling	3	6.401-459.0						Hardened stainless steel male coupling for quick coupling 6.401-458. With M 22 x 1.5 external thread.	<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories.

# HD 5.0/50 EB CAGE

## 1.107-084.0




		Order no.	Nozzle size				Price	Description	
<b>Power nozzle spray angle 25°</b>									
Chemical nozzle	1	2.884-521.0	250					Brass power nozzle for low pressure operation and cleaning agent suction.	<input type="checkbox"/>

■ Included in the scope of supply.    □ Available accessories.

# HD 5.0/50 EB CAGE

## 1.107-084.0

**KÄRCHER**

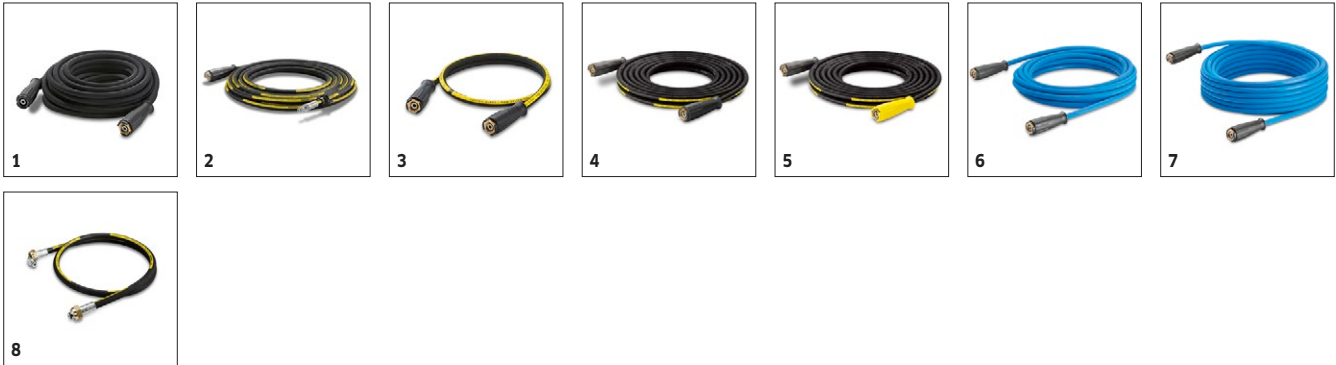

		Order no.	ID	Max. working pressure	Length	Price	Description	
<b>Standard with unions on both sides</b>								
High-pressure hose, 10 m, ID 8, 315 bar, extension	1	6.391-342.0	DN 8	315 bar	10 m		To extend the operating radius with the high-pressure cleaner. Connection on both sides M22 x 1.5.	<input type="checkbox"/>
<b>Longlife 400</b>								
High-pressure hose Longlife 400, 10 m, ID 8, AVS trigger gun connection	2	6.391-351.0	DN 8	400 bar	10 m		With patented AVS connection in the trigger gun (rotatable) and hand screw connection, M 22 x 1.5 with kink protection. With double steel reinforcement.	<input type="checkbox"/>
<b>Longlife 400 with unions on both sides</b>								
High-pressure hose 1.5 m, ID 8, including connectors	3	6.390-178.0	DN 8	400 bar	1.5 m		1.5 m high-pressure hose (DN 8, M 22 x 1.5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22 x 1.5).	<input type="checkbox"/>
High-pressure hose Longlife 400, 10 m, ID 8, extension	4	6.391-354.0	DN 8	400 bar	10 m		To extend the operating radius with the high-pressure cleaner. Connection on both sides M22 x 1.5.	<input type="checkbox"/>
High-pressure hose Longlife 400, 15 m, ID 8, including rotary coupling	5	6.389-709.0	DN 8	400 bar	15 m		With rotary coupling, 2 x M 22 x 1.5	<input type="checkbox"/>
<b>Longlife food design with screw connections at both ends</b>								
High pressure hose food ID 8, 10 m	6	6.391-864.0	DN 8	400 bar	10 m		Longlife HP hose for use in the food industry. Außen-decke## animal-grease-resistant, non-colour-bleeding material. With rotary coupling, 2 x M 22 x 1,5	<input type="checkbox"/>
High-pressure hose food industry 400 bar, 20 m, ID 8, including rotary coupling	7	6.391-887.0	DN 8	400 bar	20 m			<input type="checkbox"/>
<b>Special hoses</b>								
High-pressure hose, 1.5 m, ID 8, incl. connection parts, curved outflow	8	6.388-886.0	DN 8	400 bar	1.5 m		Connection hose in longlife quality with 2x M22 x 1.5, with angled connection on one side.	<input type="checkbox"/>

■ Included in the scope of supply. □ Available accessories.

# HD 5.0/50 EB CAGE 1.107-084.0



		Order no.					Price	Description	
<b>Rotary coupling</b>									
Rotary coupling	1	4.401-091.0						Reliably prevents twisting of HP hoses. Connection M 22 x 1.5 m. Handle protection	<input type="checkbox"/>

■ Included in the scope of supply.    □ Available accessories.

# HD 5.0/50 EB CAGE

## 1.107-084.0



		Order no.	Max. working pressure	Nozzle size	Diame-ter	Price	Description	
<b>Drum and tank cleaning</b>								
Add-on kit mud sucker	1	2.641-798.0					For connection to the high-pressure hose of Kärcher high-pressure cleaners: Powerful sludge suction cleaner for the retrofitting of high-pressure cleaners to dirt pumps.	<input type="checkbox"/>

■ Included in the scope of supply.    □ Available accessories.