



Warning

These are only brief instructions! Please read and comply with these instructions prior to using or servicing your appliance.

The non-compliance of the operating and safety instructions may lead to damages of the appliance and to dangers for the operator and other persons.

Start up

1



- A Insert the coupling of the fresh water hose into the fresh water connection of the appliance and lock into place.
- B Insert the suction hose into the suction hose connection on the appliance.

2



- A Connect the fresh water hose to the elbow of the manual nozzle.
- B Connect the suction hose to bender of the manual nozzle.

Operation

1



- A Remove the lid.
- B Remove the wastewater container from the appliance.
- C Refill the wastewater container with fresh water.

2



- A Fill in fresh water.
- B Fill detergent solution/the tab including its water soluble packaging into the fresh water reservoir. The fill level must not exceed the "MAX" mark. After 5 minutes, the tab will be completely dissolved.
- C Insert dirt water reservoir into the appliance and attach lid.


3



- A Press the spray switch to turn on the detergent pump.
- B Press the suction switch to turn on the suction turbine.
- C If the dirt water reservoir is full, switch off the suction and spray switches.


Operation

4

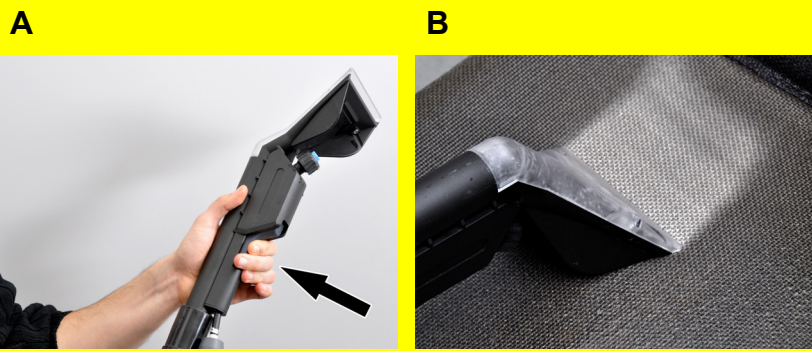

- A Use the lever on the bender to spray on detergent solution.
- B Spray and suction off detergent solution in one work cycle.

5

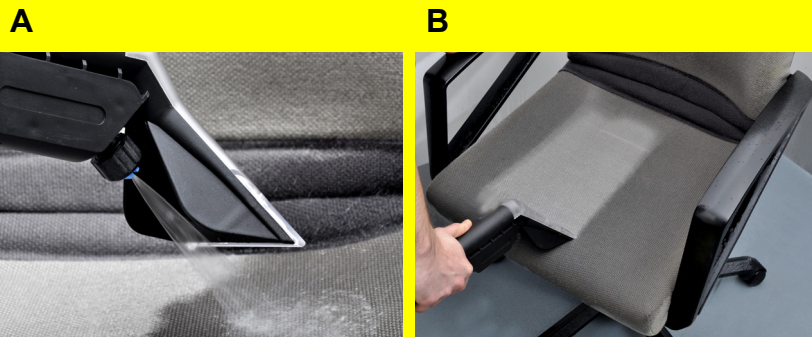

- A Highly soiled spots should be presoaked and the detergent solution should soak 5 to 10 minutes.
- B Vacuum up the detergent solution in the course of the second work step.

Finish operation

1



- A Switch off the vacuuming and spraying switches.
- B Remove the lid.
- C Empty the wastewater reservoir.

2



- A Fill the fresh water tank with clear water and to rinse/clean the appliance.
- B Spray the accessories into the wastewater tank, along with fresh water (approx. 1-2 minutes)
- C Empty the fresh water reservoir and switch the appliance off.
- D Empty the wastewater reservoir.

3



- A Shortly activate the lever on bender to decrease the pressure. Pull the coupling backwards.
- B Place the lid loosely to let the appliance dry out.