




WESTFIELD 

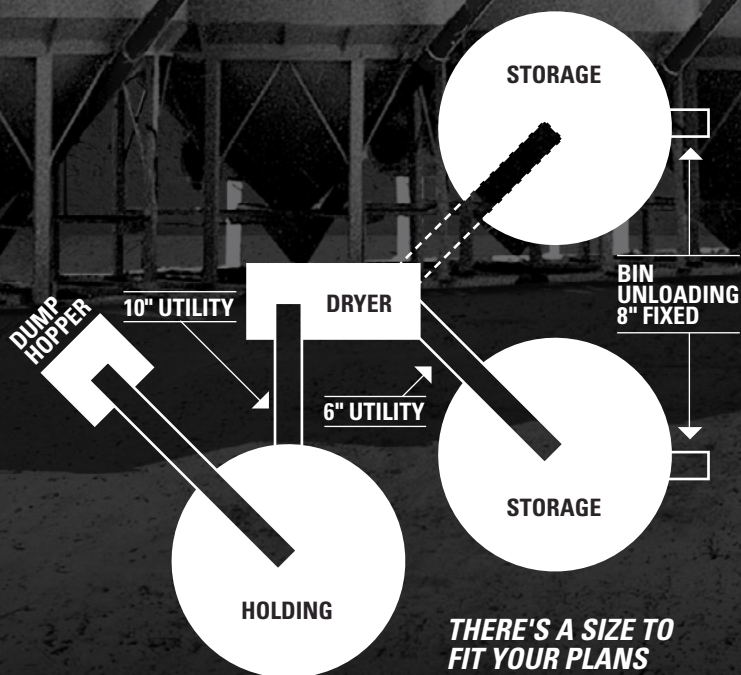

THERE'S A SIZE TO FIT YOUR PLANS

UTILITY AUGERS

- For permanent or semi-permanent auger installations
- Utility augers in 4", 6", 8", 10" and 13" diameters in various lengths
- Can be used at grain bins or bulk tanks
- Electric motor, pulley, and switches not supplied

4" 11' BASIC AUGER 5' & 10' EXTENSION	6" 8" 10" 16' BASIC AUGER 5', 10' or 15' EXTENSION	13" 21' BASIC AUGER 5', 10' or 15' EXTENSION
 <p>Portable 4" auger, adjustable motor mount, shielded single "A" belt and pulley, and pre-lubricated top end bearing.</p>	 <p>Handy swivel mount bracket for quick mounting to truck box, wagon or feed bin.</p>	 <p>Upper drive has heavy-duty flange ball bearing and adjustable motor mount with double "B" belts and pulley (triple belts on 13" models).</p>
	 <p>Optional bolt-on flight support bushing with grease fitting (standard on 13" models).</p>	 <p>Optional bolt-on tube clamps for attaching support bracing.</p>
		 <p>Optional handy steel hopper with flight support bearing. Also available with hinged lid for 6" to 10" models.</p>
 <p>Shielded intake assembly bolts to basic drive section or extension, shown with optional adjustable feed control.</p>		

OTHER **OPTIONS** Flex Spout | Poly Hopper | Triple Groove Pulley (comes with 3-belts for long 10" augers)

SPECIFICATIONS

	4"	6"	8"	10"	13"
Recommended pulley size for 1,750 RPM motors	1A 2" – 2 ¼"	2B 3½" – 4"	2B 3¼" – 3½"	2B 3¼" – 3½"	3B 3¼" – 3½"
Flight speed	440" – 490"	480" – 550"	445" – 480"	380" – 410"	355" – 380"
Auger pulley supplied	1A 8"	2B 12.7"	2B 12.7"	2B 15"	3B 16"
Belt(s) supplied	1 – A33	2 – B48	2 – B 51	2 – B 62	3 – B 67
Extensions available	5', 10'	5', 10', 15'	5', 10', 15'	5', 10', 15'	5', 10', 20'
Tube gauge	16 GA	16 GA	14 GA	14 GA	12 GA
Flight gauge	13 GA	12 GA	10 GA	7 GA	7 GA

NOTE: For intermittent feed, a slightly smaller pulley will allow easier startup under load.

HORSEPOWER REQUIREMENTS

	4"	6"	8"	10"	13"
11"	¾	—	—	—	—
16' – 21'	¾ – 1	1½ – 2	3	3 – 5	10
26' – 31'	1 – 1½	3	5	5 – 7½	15
36' – 41'	1½ – 2	3 – 5	5 – 7½	7½ – 10	20
46' – 51'	2 – 3	5	7½ – 10	10 – 15	—
56' – 61'	—	7½	10	15 – 20	—

*Requirements above are for dry grain. High moisture grain will require additional horsepower.



Westfield augers are designed with operator safety in mind. For more information on how to safely operate your Westfield auger, please refer to the product manual or visit grainaugers.com.

Westfield is an Ag Growth International brand.

Ag Growth International (AGI) is a leading manufacturer of grain and fertilizer handling, storage and conditioning equipment. Our brands are amongst the most recognized in the industry. The AGI product catalog includes portable handling equipment (augers, belt conveyors, grain vacs), permanent handling systems (bucket elevators, enclosed belt conveyors, chain conveyors, structural) and storage systems (aeration, drying, bins/silos) that service the grain, fuel and fertilizer sectors for on-farm and commercial operations.



Box 39, 74 Main Street, Rosenort, Manitoba, Canada R0G 1W0
866.467.7207 | grainaugers.com

