




DML/HY

Mulcher with fixed teeth for excavators having a weight between 5 and 13 t.

Standard equipment: variable displacement hydraulic piston motor (17-34cc) with relief and anticavitation valve, flow control system valve, „double steel cage system” machine shell, double protection hood with mechanical adjustment, belt transmission, oversized rotor bearings, double Hardox® counter blade, rotor with D type tools.

Options: custom made attachment plate with pins, hydraulic cylinders for the front and rear protection hood, diverter valve “Plug and Play”.

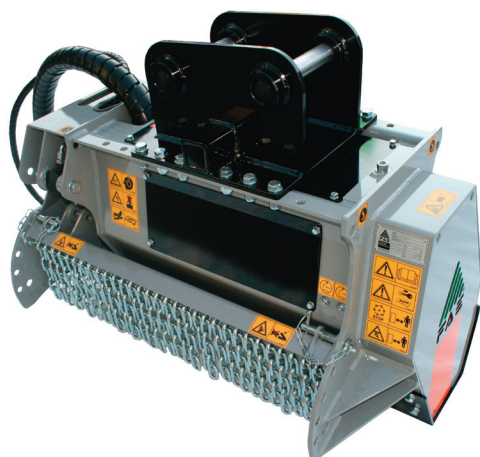

DML/HY

Model	Power HP	Requirements		Excavators weight t.	Working width inches	Weight Lbs	Grinding diameter inches (max)	Tooth q.ty Blade E
	Min - Max	Flow gal/min Min - Max	Pressure PSI Min - Max					
DML/HY 75	50 - 100	13 - 34	2600 - 3600	5 - 13	30	1036	5	14
DML/HY 100	50 - 100	13 - 34	2600 - 3600	6 - 13	39	1080	5	18
DML/HY 125	50 - 100	13 - 34	2600 - 3600	6 - 13	49	1125	5	22

Data refers to the machine without options.



Blade E