


Farm King

ROUND BALE CARRIER

Model 2400



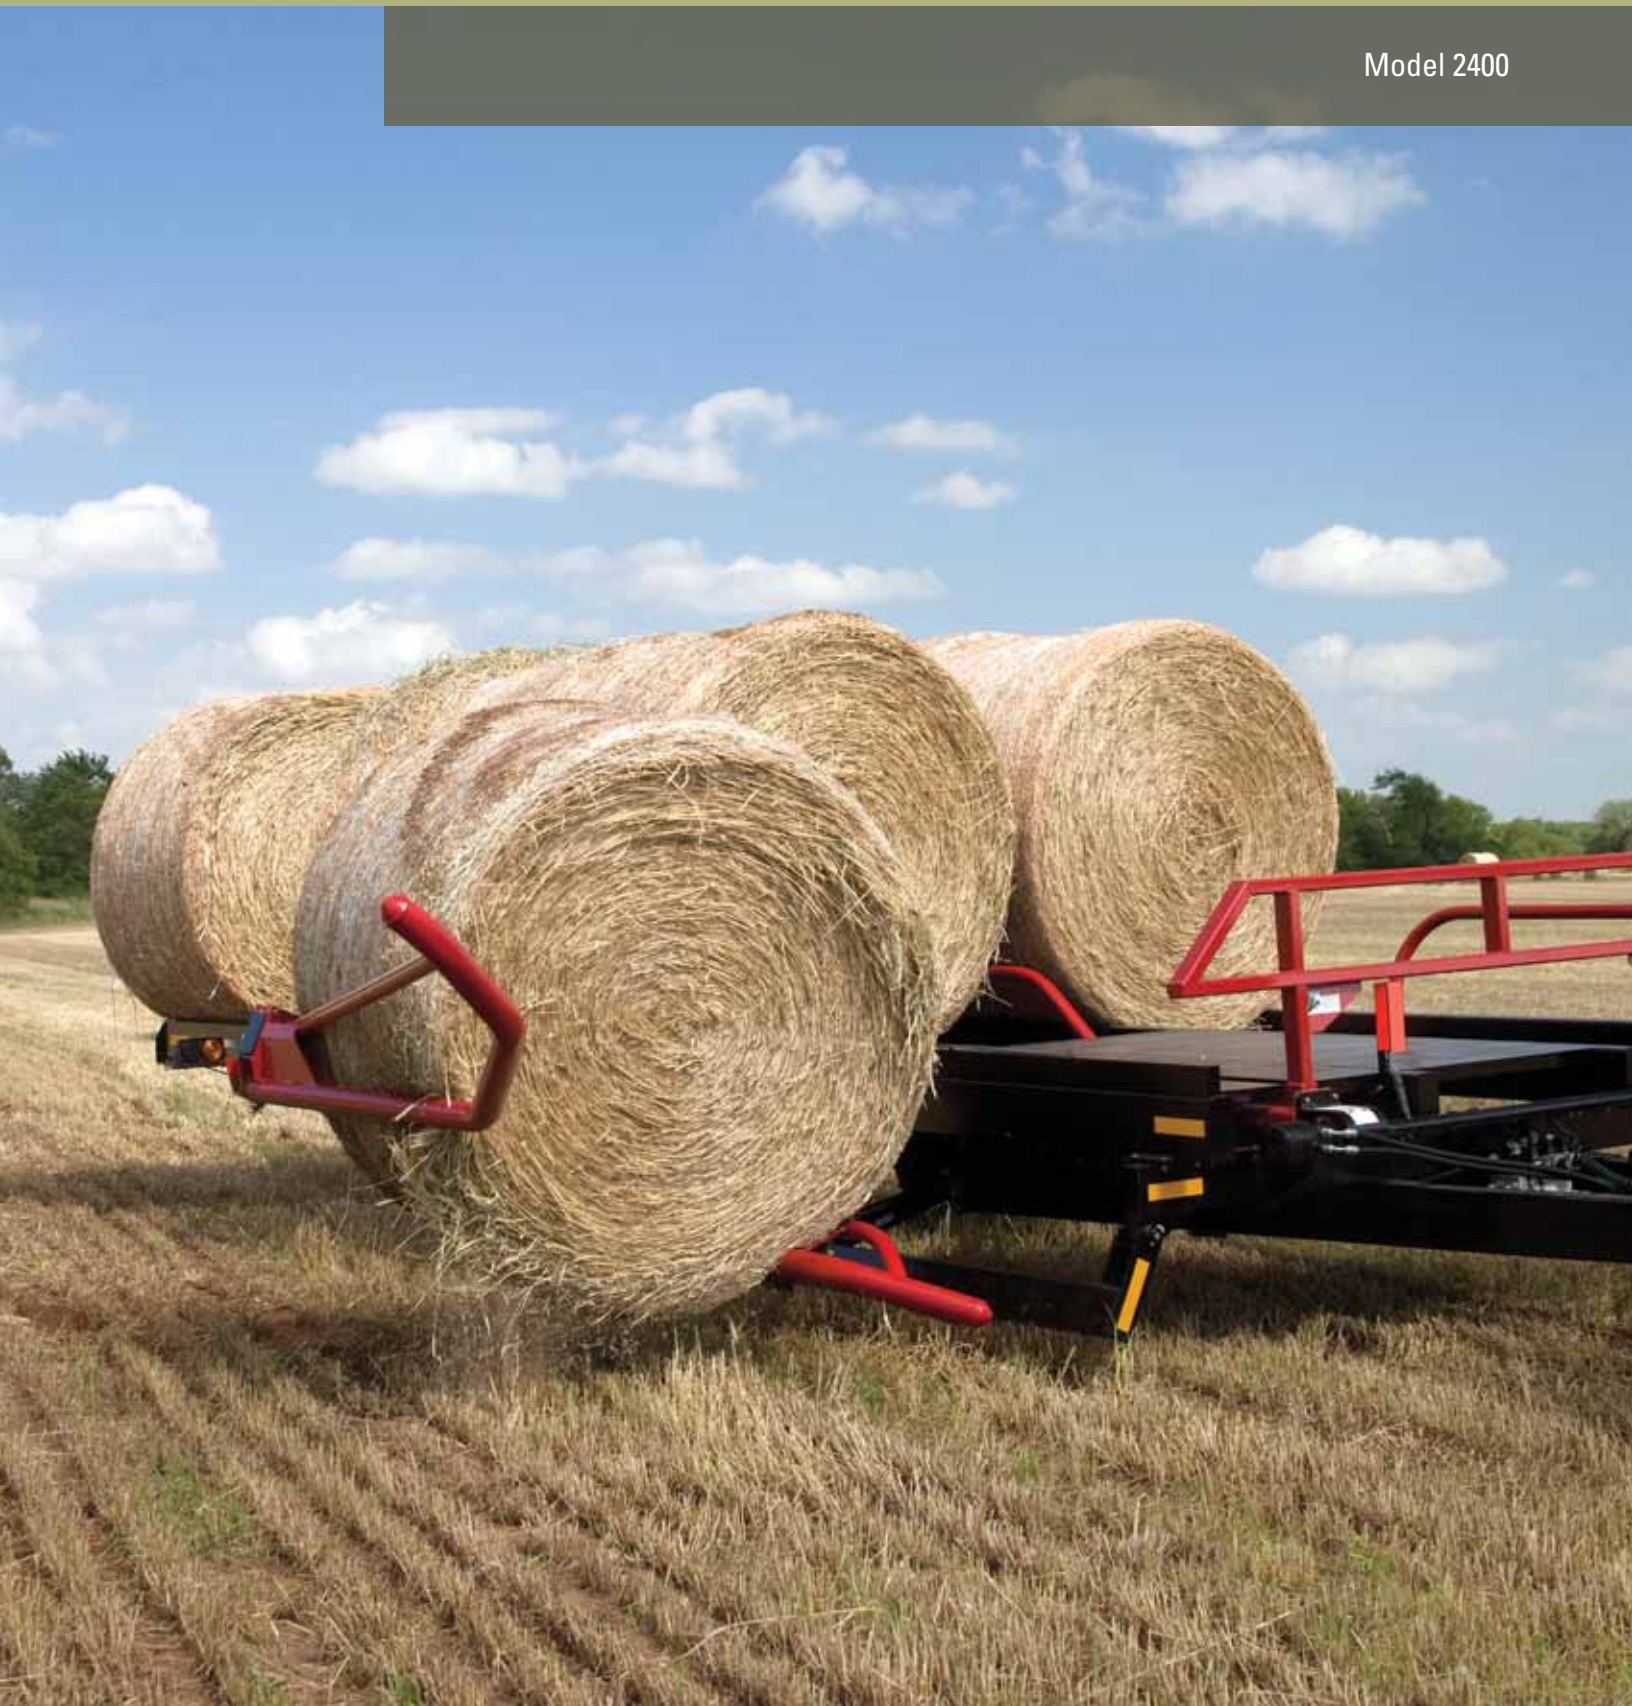

The Farm King 2400 Round Bale Carrier was designed to be maneuverable and easy to pull. Specifically built to handle hilly and rough terrain the 2400 is capable of carrying twelve 4' wide bales or eight 6' wide bales. The single loading arm is easy to operate and gently lifts each bale from the ground to the carrier deck where a platform allows the bale to easily move to the left side of the carrier.



After bales are lifted onto the carrier deck a pusher moves the bales rearward. Powered by two hydraulic motors, the pusher has two settings that are selected on the handheld remote. The operator can choose the most efficient speed and torque for varying conditions: 'high' for dry hay and straw; 'low' provides additional torque for wet or high moisture silage bales, and the pusher moves with less speed.

The pickup arm gently lifts the bulk of the weight of the bale and pivots the bale into position before lifting it onto the deck. The pusher, powered by two hydraulic motors, slides the bales rearward on graphite coated carrier beams. To unload, the carrier deck tips back and the bales are pushed off to form neat, tight rows. This entire system means more efficient bale handling, less damage and more bales moved each day.

A hand-held control works with the tractor remotes to operate all the functions of the bale carrier. The bale carrier uses two sets of tractor hydraulic outlets.

Farm King

1330 43rd Street NW
 Fargo, ND USA 58102
 Ph.: 701.282.7014 | Fax: 701.282.5865
 Toll Free: 877.447.6008
 E-mail: info@buhler.com
 www.farm-king.com

Equipment shown is subject to change without notice. TSX:BU1
 ©2012 BuhlerTrading Inc. Printed in Canada. Ref: 062012-1000-LM

bühler | a division of Buhler Industries Inc.

MODEL	2400
Capacity	GVW: 18,720 lb (8491 kg) Twelve - 4' wide bales Eight - 6' wide bales
HP requirements	80 hp (60 kW)
Max. speed (loaded)	20 mph (32 km/hr)
Hand held remote control	Power: 12v, Fuse: 15 amp
Hydraulics	Two double acting circuits required
Tires	(4) 12.5L x 15FI tires, load range F, intermittent unloaded highway use
Deck length	26' (7.9 m)
Overall length	34' (10.4 m)
Transportation width	12' 7" (3.8 m)
Shipping weight (approx.)	6,600 lb (2,995 kg)