



SCH SCH/GT

Stump cutter with a max working depth of 20 inches for tractors between 130 and 350 HP.


Standard equipment: SCH 45 and SCH 55: PTO driveshaft with cam clutch, hydraulic side shifting, belt transmission.

SCH/GT 65: PTO driveshaft with cam clutch, hydraulic side shifting, gear transmission (only for DT model).

SCH/GT 75: PTO driveshaft with cam clutch, gear transmission.

Options: hydraulic top link, option of rotor equipped with tooth type "A/HD".

Notes: For the correct usage, a creeper gear transmission is recommended.

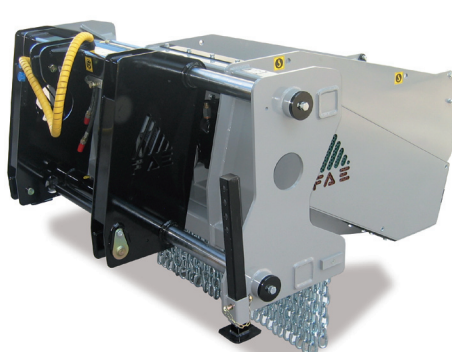

SCH with hydraulic side shifting

Model	Tractor HP		PTO rpm	Working width inches	Overall width inches	Weight lbs	Working depth in (max)	Teeth q.ty/type A+MH
	min	max						
SCH SS 45 ST	130	180	1000	20	71	4344	20	30+4
SCH SS 55 DT	160	280	1000	25	71	5931	20	34+4

SCH/GT

Model	Tractor HP		PTO rpm	Working width inches	Overall width inches	Weight lbs	Working depth in (max)	Teeth q.ty/type A+MH
	min	max						
SCH/GT 65 ST	140	200	1000	29	71	6173	20	28+4
SCH/GT 65 DT*	180	300	1000	29	71	6394	20	28+4
SCH/GT 75 DT	200	350	1000	32	50	7056	20	34+4

Data refers to the machine without options. * with hydraulic side shifting



Tooth type A (standard)



Tooth type A/HD (option)



Tooth type F (option)



Side scraper Type MH