




SSL Speed

Forestry tiller with a max grinding diameter of 12 inches for tractors between 100 and 220 HP.

Standard equipment: gear transmission, PTO driveshaft with cam clutch, gearbox with freewheel, hydraulic rear hood, KIT - Filtration System.

Options: hydraulic top link, hydraulic support roller for height adjustment, self-levelling guard frame, stronger PTO drive line (W2600) (only for DT-models).

Notes: for the correct usage, a creeper gear transmission is recommended

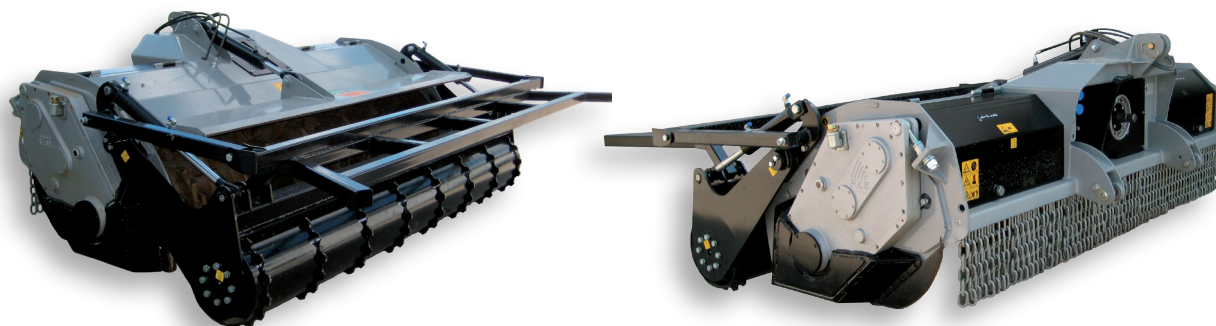

SSL Speed

Model	Tractor HP min max	PTO rpm	Working width inches	Overall width inches	Weight lbs	Grinding diameter inches (max)	Working depth inches (max)	Teeth q.ty/type B/3+C/3/SS
SSL Speed 150	100 - 160	1000	62	74	4410	12	12	44 + 4
SSL Speed 175	110 - 160	1000	72	83	4763	12	12	50 + 4
SSL/DT Speed 200	120 - 220	1000	81	93	5733	12	12	58 + 4
SSL/DT Speed 225	130 - 220	1000	91	102	6196	12	12	66 + 4
SSL/DT Speed 250	140 - 220	1000	100	112	6681	12	12	74 + 4

Data refers to the machine without options.



Tooth type B/3



Tooth type G/3 (option)



Tooth type C/SS (side scraper)