




## SSM SSM/HP

Forestry tiller with a grinding diameter of 16 inches for tractors between 150 and 300 HP.

**Standard equipment:** dual transmission, PTO driveshaft with cam clutch, gearbox with freewheel, hydraulic rear hood, KIT - Filtration System. In addition, for the **SSM/HP** model: stronger transmission for tractors up to 300 HP.

**Options:** hydraulic top link, hydraulic support roller for height adjustment, adjustable dozing blade, option of rotor equipped with tooth type "A/HD".

**Notes:** For the correct usage, a creeper gear transmission is recommended.

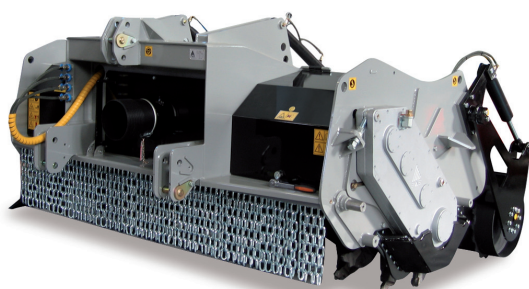

### SSM

Model	Tractor HP		PTO rpm	Working width inches	Overall width inches	Weight lbs	Grinding diameter inches (max)	Working depth inches (max)	Teeth q.ty/type A+MH
	min	max							
SSM 200	150	250	1000	82	95	6813	20	16	76+4
SSM 225	170	250	1000	91	104	7365	20	16	88+4
SSM 250	190	250	1000	101	114	7916	20	16	102+4

### SSM/HP

Model	Tractor HP		PTO rpm	Working width inches	Overall width inches	Weight lbs	Grinding diameter inches (max)	Working depth inches (max)	Teeth q.ty/type A+MH
	min	max							
SSM/HP 200	150	300	1000	82	95	6924	20	16	76+4
SSM/HP 225	170	300	1000	91	104	7475	20	16	88+4
SSM/HP 250	190	300	1000	101	114	8026	20	16	102+4

Data refers to the machine without options.




Tooth type A (standard)



Tooth type A/HD (option)



Tooth type F (option)



Side scraper Type MH