

**Unverferth**<sup>®</sup> Header Transports

*Fieldrunner AWS*



**180°  
Steering!**



## **All-wheel steering for *tighter turns, greater maneuverability***

*The Unverferth Fieldrunner with patent-pending all-wheel steering is perfect for road trips and moving from field to field. It's 100 percent tool-free adjustable for matching most every header and platform and features front-to-rear steering reduction for true tracking performance.*


*Fieldrunner Models AWS-42, AWS-36, AWS-30*

## Optimum maneuverability, trailing and towability *over any terrain*

- Front-to-rear steering connection for true tracking performance
- 180° front turning for optimum maneuverability
- Patented rear oscillating frame provides added flexibility and enhanced trailering
- 20,000 lb. capacity chassis with automotive-type ball-joint steering, spindles with tapered roller bearings, 10-ton hubs and high-capacity tires for long-term dependability
- 6"x4" lower rest support is trussed for handling the heaviest loads
- Patent-pending tool-free adjustable, extendable-height rest brackets with high-visibility design for easily matching and placing the head or platform
- 2" tiedowns with easy-operating ratchet tighteners for securing the load
- Standard lighting package with wiring routed through the frame and retractable cord for optimum durability
- 12' tongue with extendable clevis hitch and adjustable, spring-assist lift design for easy attachment to the towing vehicle
- Width-adjustable rear L.E.D. light bar for enhanced visibility and industry-standard 7-pin bladed receptacle for quick attachment
- Optional 2- or 4-wheel electric brakes that include breakaway engagement for enhanced transport safety



180° front steering

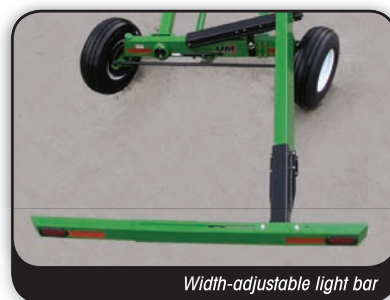

Width-adjustable light bar



Tool-free adjustable rest bracket



Spring-lift assist tongue

### Unverferth Fieldrunner AWS Specifications

Model Number	AWS-42	AWS-36	AWS-30
Fits Conventional Grain Platforms	42' and smaller	36' and smaller	30' and smaller
Fits Draper Platforms	42' and smaller	36' and smaller	30' and smaller
Fits Corn Heads (30" rows)	16-row & specialty	12-row & smaller	12-row & smaller
Carrying Capacity	13,000 lbs.	13,000 lbs.	13,000 lbs.
Approx. Weight with Wheels and Tires	2,800 lbs.	2,700 lbs.	2,200 lbs.
Tread Width	80"	80"	80"
Height Adjustment, Maximum	4'3"	4'3"	4'3"
Height Adjustment, Minimum	2'6"	2'6"	2'6"
Bracket Height Adjustment, Maximum	2'6"	2'6"	2'6"
Bracket Height Adjustment, Minimum	2'4"	2'4"	2'4"
Upper Support Tube	8"x 4"x43'	8"x 4"x37'	6"x 3"x31'
Wheel Base	30'	30'	24'
Overall Length	51'	47'	42'
Span Between Upper/Lower Bar, Maximum	4'5"	4'5"	4'5"
Span Between Upper/Lower Bar, Minimum	2'5"	2'5"	2'5"

See your nearest Unverferth dealer today or check our website at [www.unverferth.com](http://www.unverferth.com) for complete details about the Fieldrunner AWS header carrier. It's the right tool for the job.

Due to continuing improvements in the design and manufacture of Unverferth products, all specifications contained herein are subject to change without notice.



**Manufacturing Company, Inc.**  
P.O. Box 357 • Kalida, Ohio 45853  
(419) 532-3121 • FAX (419) 532-2468  
unverferth.com  
**1-800-322-6301**

Please remind all family members and others to use caution and follow recommended safety practices when around all farm equipment. Unverferth Manufacturing Co., Inc., supports the efforts of Farm Safety 4 Just Kids and all other organizations that promote farm safety.

U.S. Patent 5,374,082

©2010 Unverferth Manufacturing Co., Inc. Printed in U.S.A.

®™ Trademarks, registered or applied for, of Unverferth Manufacturing Co., Inc., Kalida, OH

Additional facilities in California, Georgia, Iowa, Nebraska, North Dakota, Oregon and Canada



AWSHT010380M7