

TRUE-TANDEM™ 335VT & 335 BARRACUDA VERTICAL TILLAGE



TRUE-TANDEM™

335VT & 335 BARRACUDA VERTICAL TILLAGE







SPRING OR FALL, IT'S ABOUT CREATING THE BEST SEEDBED POSSIBLE.

2 Models | 22 ft. (6.7 m)–47 ft. 2 in. (14.4 m) Working Widths

Whether it's spring or fall, Case IH vertical tillage equipment delivers a fast and efficient way to cover lots of acres, manage crop residue, level the soil and achieve optimal field conditions. And our industry-exclusive vertical tillage blades deliver the consistency you need for uniform germination, rapid emergence and increased yield.

CASE IH VERTICAL TILLAGE

| | |
|---|-------|
| Agronomic Design™: Cut, Size and Level | 4-5 |
| Durable Design Levels the Growing Field | 6-7 |
| Keep Your Edge with Earth Metal® Blades. | 8-9 |
| Achieve Seedbed Perfection. | 10-11 |
| Choose the Right True-Tandem. | 12-13 |
| Specifications | 14-15 |

AGRONOMIC DESIGN: CUT, SIZE AND BURY MORE RESIDUE.

Case IH vertical tillage equipment lets you slice through tough residue, uproot root balls and level out the soil to create the best possible seedbed for your next growing season. Our vertical tillage lineup, which includes the True-Tandem 335VT and the True-Tandem 335 Barracuda, is built on proven Agronomic Design principles with industry-exclusive blades, so you can more effectively control soil and residue. Our patented system moves material up, over and out, stratifying soil particles and increasing aeration for improved soil tilth and seedbed conditioning.



CROP RESIDUE MANAGEMENT.

Heavy corn stalks, soybean stubble or wheat stubble are controlled from the tractor cab with the True-Tandem's patented TigerPaw™ Crumbler active hydraulic down force. Its double-edge Crumbler puts the final touches on the seedbed in spring or fall. Precise single-point depth adjustment provides greater control over soil residue cover at planting and fits a wide range of soil types, topographies and management objectives.

At speeds of up to 6 to 9 miles per hour, shallow blade concavity helps dig up stubborn root balls and properly mix residue for greater nutrient cycling. Robust frames accommodate higher ground speeds and provide balanced weight distribution over tough, fast-changing conditions. This improves soil leveling and creates an environment for accurate seed placement and positive seed-to-soil contact.

SOIL TILTH.

Soil tilth functionality breaks through crusty sealed-over soils to achieve the proper balance of minerals, air and water.

Our True-Tandem vertical tillage lineup features exclusive concave wavy blades that send soil and residue up, over and out, promoting a better seedbed finish without the excessive compaction typical of heavier disks and other vertical tillage tools. In addition, hair-pinning is reduced, resulting in improved stand establishment.

SEEDBED CONDITIONING.

Properly indexed front and rear blades mounted to an 18-degree gang angle allows unmatched seedbed consistency both on the surface and sub-surface floor. Blade spacing on each gang provides a flat surface with ideal residue sizing. Uniform seedbed depth and temperature contribute to early, even plant emergence.

Our patented TigerPaw Crumbler maintains steady contact with the ground and uses rifled, double-edged bars to break up clods and leave a level surface. The rolling Crumbler promotes maximum decomposition and reduced wind erosion.

THE EARTH METAL ADVANTAGE.

Our industry-exclusive Earth Metal® blades let you cover rocky terrain and uneven ground with confidence — even at high speeds. Earth Metal blades are engineered and manufactured using a raw boron-based steel formula and precise heat treating process with automation, making them tough and breakage-resistant. Proven more durable than other blades that often contain recycled material, these blades penetrate hard, dry soils and break through surface compaction with ease.

DON'T JUDGE A SEEDBED BY ITS SURFACE.

A level seedbed is key to maximizing yields and it's the reason why producers spend time and money creating a smooth seedbed surface. However, a seedbed consists of more than just the soil surface. It's comprised of the entire layer of soil where the seed is placed and germinates, including the seedbed floor. It's the seedbed floor that impacts the planter's ability to place seeds at the desired depth and spacing – ultimately, affecting yield.



UNEVEN



EVEN



SEEDBED ASSUMPTION.

The seedbed surface is the most important aspect of seedbed preparation.

When properly set, nearly all vertical tillage tools provide a smooth surface appearance. So what makes the Case IH True-Tandem vertical tillage line-up different from the competition? The difference lies beneath the surface.

SEEDBED REALITY.

The seedbed floor impacts even plant emergence and is fundamental in maximizing yields.

Nearly all vertical tillage tools leave an uneven seedbed floor—it's a matter of to what degree. The bumpy sub-surface minimizes planter performance and leads to uneven seed placement.

ADVANTAGES.

- The True-Tandem vertical tillage line-up delivers an even, smooth seedbed by leveling the entire soil layer – including the seedbed floor.
- Front and rear gang blades are precisely indexed to each other to remove any unevenness in the floor.
- The smooth sub-surface maximizes planter productivity to place seeds at the desired depth and spacing.
- Achieve uniform germination, rapid emergence and increased yields.

DURABLE DESIGN LEVELS THE GROWING FIELD.

The True-Tandem 335VT and Barracuda helps you cover more ground in less time so your fields are ready to go when your planting window approaches. Our industry-leading vertical tillage technology enhances operator control, reduces maintenance and extends component life.

GREASELESS BEARINGS.

Greaseless bearings on wheels and TigerPaw Crumbler reduce routine maintenance and keep you in the field longer. These are featured on wing pivots, rockshafts and the TigerPaw Crumbler.

LED LIGHTING.

LED lights provide superior brightness, improving visibility during transport and are longer lasting than traditional incandescent light bulbs. Additionally, a Class 3 powder coat paint finish provides more resistance to impact and fading.



GANG ASSEMBLY.

The 18-degree gang angle paired with each blade's concavity and crimped center results in even cutting and mixing action for a superior finish.

With a dynamic duo of Earth Metal and cast-iron components, the gang is assembled with crimp-center blades and cast-iron nodular spools, reducing maintenance, such as tightening bolts or adding additional weight kits.

A U-shaped scraper design decreases the likelihood of bending from rocks and debris. Arbor bolts hold torque more consistently and durable parts provide the necessary weight to cut residue and penetrate hard soil, while standard cushion c-springs absorb the shock load when blades hit an obstruction.

■ MAINFRAME AND WINGS.

The rugged, low-maintenance pull-through frame eliminates drift and accommodates higher ground speeds, resulting in uniform weight per blade and improved balance in heavy residue and a wide range of soil moisture conditions. Symmetrical True-Tandem design pulls straight and levels soil.



■ SINGLE-POINT HYDRAULIC DEPTH CONTROL.

Easily adjust operating depth with a single hand crank, conveniently located at the front of the machine to meet your needs.



■ FRAME-MOUNTED GAUGE WHEELS.

Our 7.6 × 15-inch gauge wheels feature an adjustable one-way-pivot design. Stabilizer wheels are bolted directly to the frame for less wobble in normal field-operating conditions. Operators can quickly and easily set the gauge wheels for wing leveling with no wrenches. And stubble-resistant tires help prevent flats caused by tough residue.



■ WALKING TANDEMS.

Standard walking-tandem design offers balance and stability for a more consistent seedbed.



■ FORE AND AFT LEVELING.

Adjust levelness from the cab using hydraulics and view the gauge from the cab to easily return to your pre-adjusted position.



KEEP YOUR EDGE WITH EARTH METAL BLADES.

The Earth Metal VT Wave blade runs on its edge, causing soil to explode off the front side of the blade and level without back-side pressure, resulting in maximum penetration and reduced compaction when compared with other vertical tillage blades.



BARRACUDA BLADE.

The True-Tandem 335 Barracuda features 22-inch serrated blades for aggressive crop residue and soil management, effectively sizing and evenly incorporating even the most stubborn crop residue for faster nutrient cycling.

- More concavity to leave behind a blacker surface finish than other vertical tillage blades and tools.
- Rugged, serrated “chisel tip” blades stay sharper longer.
- Cut residue up to 4 inches deep in one pass, allowing break up of hard, dry soils for increased nutrient cycling.

VT WAVE BLADE.

The True-Tandem 335VT features two different options of shallow concavity, fluted 20-inch blades to more effectively cut residue and super charge the soil for better clod sizing, mixing and placing small soil particles in the seed placement zone. The indexed and fluted blades provide the smoothest, most uniform seedbed at depths up to 3 inches deep.

- **20×0.256 in. (508×6.5 mm) VT Wave** shallow concavity blades.
 - Rugged blade thickness of 0.256 in. (6.5 mm) to provide protection from rock damage.
- Longer edge life **20×0.197 in. (508×5 mm) VT Wave** shallow concavity blade.
 - The 0.197 in. (5 mm) thick blade provides the same agronomic benefits as the .256 in. (6.5 mm) blade but yet stays sharper throughout its life.
 - Ideal for areas without rocks.

ACHIEVE SEEDBED PERFECTION.

Put the finishing touches on your seedbed with the double-edge TigerPaw Crumbler.



TIGERPAW CRUMBLER OPTION.

- The **TigerPaw Crumbler** is mounted directly to the main frame, making it a more stable, long-lasting and reliable tool.
- Each TigerPaw Crumbler bar has two edges to hit large clods twice and tuck residue in the surface for improved leveling and better seed-to-soil contact.
- The bars are rifled for consistent down pressure on the soil. Hydraulic cylinders provide quick and easy adjustability and settings to match field conditions.
- Down force adjustment is made from the hydraulic valve block found near the front of the tool. The Crumbler position is controlled from the cab and can be run in three different modes: active down pressure, float or raised up to get through wet spots.



HOOK TO YOUR TRACTOR AND GO.

The rugged True-Tandem frame provides two height options for the hitch, depending on the tractor's drawbar. Whether going across rugged, rolling terrains or field to field, you'll be able to easily maneuver the equipment.

HITCH OPTIONS.

- **Front T-Bone Hitch/Pull Frame:** Engineered to maximize rear tractor tire clearance during tight turns, the Front T-Bone Hitch is spring cushioned and features the "Perfect Hitch" clevis for tractor pin compatibility and extra safety during hook-up.
- **Swivel Hose Stand:** Mounted on the pull hitch, the Swivel Hose Stand keeps hydraulic hoses and wires out of the way during hook-up and transport.
- **Rear Hitch:** This optional feature allows for pull-type attachments for additional soil conditioning. Equipped with a 9-pin electronic connector for lighting and one set of hydraulic couplers, the Rear Hitch has a vertical capacity of 1,000 pounds.




CHOOSE THE RIGHT TRUE-TANDEM.


The following charts will help you determine which Case IH True-Tandem product is right for your operation and tillage practices.




RESIDUE BURIAL*

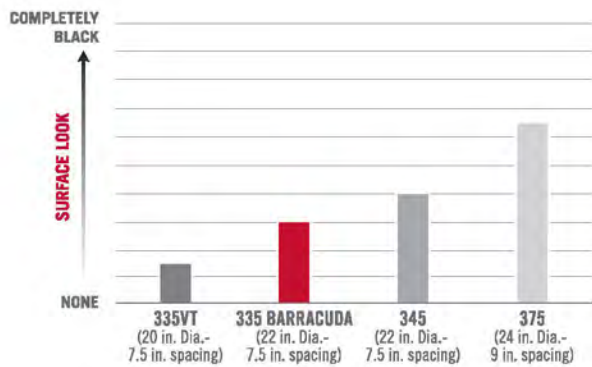

SURFACE LEVELNESS**

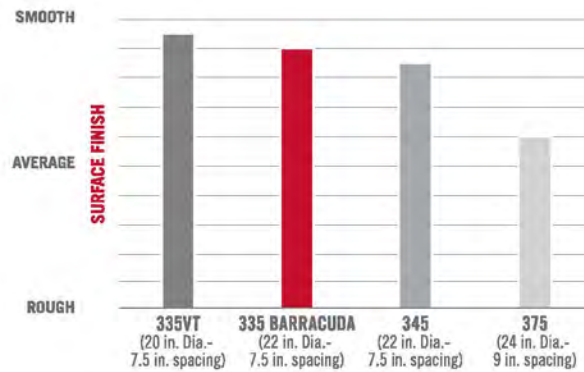


RESIDUE SIZING**

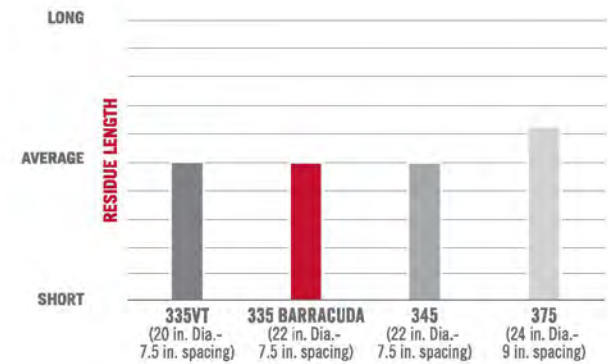


* Residue cover judged at median recommended operating speeds and depths. Fall use, heavy corn stalks. Results may vary depending on initial conditions, depths and speed.
 ** Fall use, heavy corn stalks. Combination of judgment of clod size and peaks/valleys of surface. Results may vary depending on initial conditions, depths and speed.



HP REQUIREMENTS (PER FT.)†

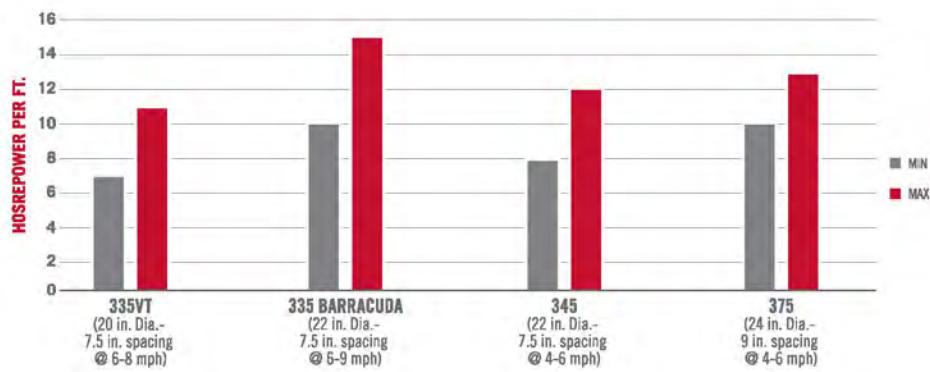

ACRES PER HOUR (34 FT.)†

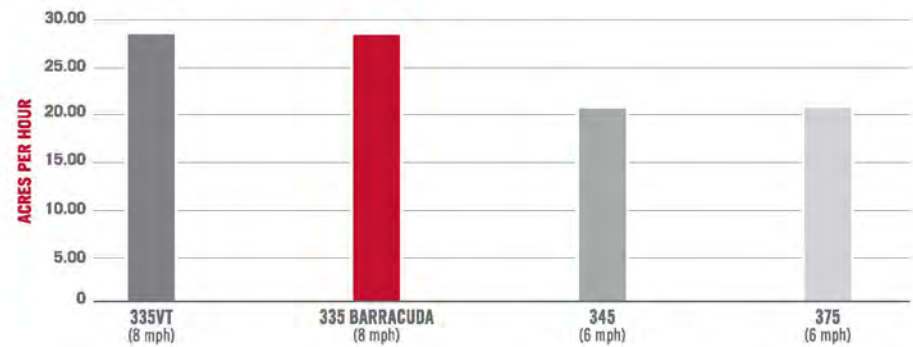

† Results may vary depending on initial conditions, depths and speed.

TRUE-TANDEM 335 BARRACUDA SPECIFICATIONS

| MODEL | | TRUE-TANDEM 335 BARRACUDA | | | | |
|---------------------------------------|--|---------------------------|-------------------------|--|--|--|
| SPECIFICATIONS | 22 FT. (6.7 M) | 25 FT. (7.6 M) | 28 FT. (8.5 M) | 31 FT. (9.4 M) | 34 FT. (10.4 M) | |
| PTO Horsepower | 220–330 hp (164–246 kW) | 250–375 hp (186–280 kW) | 280–420 hp (209–313 kW) | 310–465 hp (231–347 kW) | 340–510 hp (254–380 kW) | |
| Remote Hydraulic Valves | Four hydraulic remote valves | | | | | |
| Operating Depth/Speed | 1–4 in. (25.4–101.6 mm), at 6–9 mph | | | | | |
| FRAME | | | | | | |
| Main Frame | 6×6 in. (152×152 mm) and 4×4 in. (102×102 mm) fore-aft tubes | | | | 6×8 in. (152×204 mm) and 4×4 in. (102×102 mm) fore-aft tubes | |
| Wing Frame | 6×6 in. (152×152 mm) and 4×6 in. (102×152 mm) fore-aft tubes | | | | 6×6 in. (152×152 mm) fore-aft tubes | |
| Gang Frame | 3×5 in. (76×127 mm) rectangular tube | | | | | |
| Gang Angle | 18 degrees front and rear | | | | | |
| Fold | Single Fold | | | | | |
| WHEELS AND TIRES | | | | | | |
| Main Frame | 8-bolt, 12.5×15 FI standard, 340/55-16 radial stubble resistant optional | | | 8-bolt, 380/60 R16.5 Radial | | |
| Wing Frame | 6-bolt, 11L×15 8-ply standard; 8-bolt 340/55-16 radial stubble resistant tires optional | | | 6-bolt, 11L×15 8-ply standard; 8-bolt 380/60 R16.5 radial stubble resistant optional | | |
| Gauge Wheels | Pivoting wing stabilizer 6-bolt, 7.60×15 8-ply | | | | | |
| ARBOR BOLT | | | | | | |
| Size | 1.5 in. (38 mm), round spring steel | | | | | |
| CUSHION GANG BLADES AND BEARINGS | | | | | | |
| Spacing | 7.5 in. (191 mm) | | | | | |
| Blade Diameter/Thickness | 22×0.256 in. (559×6.5 mm) Barracuda Blade; Taper blades - 20×0.256 in. (508×6.5 mm) Barracuda Blade; End blades 18×0.256 in. (457×6.5 mm) VT Wave blades | | | | | |
| Number of Blades | 74 | 82 | 94 | 106 | 114 | |
| Number of Bearings | 16 | 20 | 22 | 26 | 28 | |
| Tillage Width | 22 ft. 5 in. | 24 ft. 9 in. | 28 ft. 4 in. | 31 ft. 10 in. | 34 ft. 3 in. | |
| REAR ATTACHMENTS | | | | | | |
| TigerPaw Crumbler | Standard, with double-edge formed flat bars and active hydraulic down pressure | | | | | |
| 3-Bar Rigid Coil Tine Harrow | US Delta rice only | | | | | |
| SCRAPERS | | | | | | |
| Rigid | Spool scraper; gang-to-gang scraper; and trunnion bearing shield all standard | | | | | |
| TRANSPORT SIZE (WITH CRUMBLER RAISED) | | | | | | |
| Transport Width | 14 ft. 6 in. (4.4 m) | | 17 ft. 4 in. (5.3 m) | | 18 ft. 0 in. (5.5 m) | |
| Transport Height | 10 ft. 5 in. (3.2 m) | 11 ft. 7 in. (3.5 m) | 11 ft. 8 in. (3.6 m) | 13 ft. 3 in. (4.0 m) | 13 ft. 7 in. (4.1 m) | |
| WEIGHT | | | | | | |
| | 15,600 lb. (7,076 kg) | 16,500 lb. (7,484 kg) | 18,000 lb. (8,165 kg) | 19,600 lb. (8,890 kg) | 21,900 lb. (9,934 kg) | |

*Values shown are subject to operating conditions

TRUE-TANDEM 335VT SPECIFICATIONS

| MODEL | TRUE-TANDEM 335 VERTICAL TILLAGE | | | | | | |
|---|---|------------------------|-------------------------|-------------------------|--|--|-------------------------|
| SPECIFICATIONS | 22 FT. (6.7 M) | 25 FT. (7.6 M) | 28 FT. (8.5 M) | 31 FT. (9.4 M) | 34 FT. (10.4 M) | 42 FT. (12.8 M) | 47 FT. (14.3 M) |
| PTO Horsepower | 110–220 hp (82–164 kW) | 125–250 hp (93–186 kW) | 140–280 hp (104–209 kW) | 155–310 hp (116–231 kW) | 170–340 hp (127–254 kW) | 250–420 hp (186–313 kW) | 280–470 hp (209–350 kW) |
| Remote Hydraulic Valves | Four hydraulic remote valves | | | | | Four hydraulic remote valves plus ¾" motor return | |
| Operating Depth / Speed | 1–3 in. (25–76 mm), at 6–8 mph | | | | | | |
| FRAME | | | | | | | |
| Main Frame | 6×6 in. (152×152 mm) and 4×6 in. (102×152 mm) fore-aft tubes | | | | 6×8 in. (152×204 mm) and 4×4 in. (102×102 mm) fore-aft tubes | 6×8 in. (152×204 mm) and 4×6 in. (102×152 mm) fore-aft tubes | |
| Wing Frame | 6×6 in. (152×152 mm) and 4×6 in. (102×152 mm) fore-aft tubes | | | | 6×6 in. (152×152 mm) fore-aft tubes | 4×6 in. (102×152 mm) and 6×6 in. (152×152 mm) fore-aft tubes | |
| Gang Frame | 3×5 in. (76×127 mm) rectangular tube | | | | | | |
| Gang Angle | 18 degrees front and rear | | | | | | |
| Fold | Single Fold | | | | | Double Fold | |
| WHEELS AND TIRES (STUBBLE-RESISTANT TIRE OPTION, SHOWN IN PHOTO) | | | | | | | |
| Main Frame | 8-bolt, 12.5×15 FI standard, 340/55-16 stubble resistant optional | | | 8-bolt, 380/60 R16.5 | 8-bolt, 380/60 R16.5 | 8-bolt, 16.5×16.1 (load range E) | 10-bolt, 440/55R18 |
| Wing Frame | 6-bolt, 11L×15 8-ply standard, 8-bolt w/stubble resistant tires optional | | | | | 6-bolt, 12.5L–15 FI (load range D) | |
| Gauge Wheels | Pivoting wing stabilizer 6-bolt, 7.60×15 8-ply | | | | | Castering wing stabilizer 9.5L×15 FI (load range E) | |
| ARBOR BOLT | | | | | | | |
| Size | 1.5 in. (38 mm), round spring steel | | | | | | |
| CUSHION GANG BLADES AND BEARINGS | | | | | | | |
| Spacing | 7.5 in. (191 mm) | | | | | | |
| Blade Diameter | Standard blades: 20×0.256 in. (508×6.5 mm); Taper blades 18×0.256 in. (457×6.5 mm); End blades 16×0.256 in. (406×6.5 mm) Optional: 20×0.197-in (508×5 mm); Taper blades 18×0.197-in (457×5 mm); End blades 16×0.197 in. (406×5 mm) | | | | | Standard blades: 20×0.256 in. (508×6.5 mm); Taper blades 18×0.256 in. (457×6.5 mm); End blades 16×0.256 in. (406×6.5 mm) | |
| Number of Blades | 74 | 82 | 94 | 106 | 114 | 142 | 158 |
| Number of Bearings | 16 | 20 | 22 | 26 | 28 | 38 | 44 |
| Tillage Width | 22 ft. 2 in. (6.8 m) | 24 ft. 7 in. (7.5 m) | 28 ft. 2 in. (8.6 m) | 31 ft. 8 in. (9.6 m) | 34 ft. 1 in. (10.4 m) | 42 ft. 5 in. (12.9 m) | 47 ft. 2 in. (14.4 m) |
| REAR ATTACHMENTS | | | | | | | |
| TigerPaw Crumbler | Standard, 14 in. diameter with double-edge formed flat bars with hydraulic positioning and active down pressure | | | | | | |
| 3-Bar Rigid Coil Tine Harrow | US Delta rice only | | | | | | |
| SCRAPERS—RIGID | | | | | | | |
| | Spool scraper; gang-to-gang scraper; and trunnion bearing shield all standard | | | | | | |
| TRANSPORT SIZE (WITH CRUMBLER RAISED) | | | | | | | |
| Transport Width | 14 ft. 6 in. (4.4 m) | | 17 ft. 4 in. (5.3 m) | | 18 ft. 0 in. (5.5 m) | 18 ft. 6 in. (5.64 m) | |
| Transport Height | 10 ft. 5 in. (3.2 m) | 11 ft. 6 in. (3.5 m) | 11 ft. 8 in. (3.6 m) | 13 ft. 3 in. (4.0 m) | 13 ft. 7 in. (4.1 m) | 13 ft. 4 in. (4.06 m) | |
| WEIGHT | | | | | | | |
| | 15,345 lb. (6975 kg) | 16,208 lb. (7367 kg) | 17,743 lb. (8065 kg) | 19,233 lb. (8742 kg) | 21,543 lb. (9792 kg) | 28,000 lbs (12700 kg) | 32,815 lbs (14885 kg) |



SAFETY NEVER HURTS!™ Always read the Operators Manual before operating any equipment. Inspect equipment before using it, and be sure it is operating properly. Follow the product safety signs, and use any safety features provided. CNH Industrial America LLC reserves the right to make improvements in design and changes in specifications at any time without notice and without incurring any obligation to install them on units previously sold. Specifications, descriptions and illustrative material herein are as accurate as known at time of publication, but are subject to change without notice. Availability of some models and equipment builds varies according to the country in which the equipment is used.

©2017 CNH Industrial America LLC. All rights reserved. Case IH is a trademark registered in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. Any trademarks referred to herein, in association with goods and/or services of companies other than CNH Industrial America LLC, are the property of those respective companies. Printed in U.S.A. www.caseih.com

CIH17080202