


# EU3000iK



- Portable, lightweight and compact – only 35.2 kg (77.6 lb)
- 3000 watts (25 A) of Honda inverter 120 VAC power
- Max output to start most RV AC units in the 13500 BTU/h class
- Wheels and unique folding handle for true portability
- Camping, RV camping, boating and basic home backup power

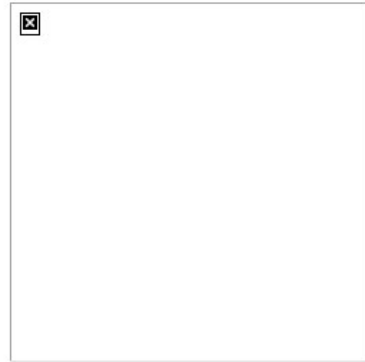

## SPECIFICATIONS

GENERATOR TYPE	INVERTER	TRANSPORT WHEELS	STD.
MAXIMUM AC OUTPUT (WATTS)	3000	LIFTING HOOK	N/A
VAC VOLTAGE AVAILABLE	120	BATTERY	N/A
MAXIMUM CONTINUOUS AC OUTPUT (WATTS)	2600	APPROXIMATE RUNNING TIME / TANKFUL (HRS.)	3.5** / 7.7***
MAX. RATED AC AMPERAGE @ 120 V / 240 V	21.7 / -	RATED FUEL CONSUMPTION (LITRES / HOUR)	1.68**
GROUND FAULT CIRCUIT INTERRUPTER (GFCI)	N/A	NOISE LEVEL dB(A) (1.5 METRES TO 7 METRES)	64** /57***
FREQUENCY (HERTZ)	60	LENGTH	N/A
AUTOMATIC VOLTAGE REGULATOR	STD.	LENGTH - WITH HANDLES FOLDED	N/A
DC OUTPUT (VOLTS / AMPS)	12 / 8.3	LENGTH - WITH HANDLES	N/A
Honda ENGINE	GX160T2	WIDTH - WITHOUT HANDLES AND WHEELS	N/A
TYPE	OHV; 4-STROKE; AIR-COOLED	WIDTH - WITH WHEELS	N/A
DISPLACEMENT	163 CC	HEIGHT - WITHOUT LIFT-HOOK	N/A
STARTING SYSTEM	MANUAL RECOIL	HEIGHT - WITH LIFT-HOOK	489 MM (19.3 IN.)
LOW LEVEL OIL ALERT™ SYSTEM	STD.	DRY WEIGHT	35.2 KG (77.6 LB)
AUTO THROTTLE	ECO-THROTTLE™ STD.	LENGTH - WITHOUT HANDLES AND WHEELS	N/A
REMOTE START CAPABILITY	NO	LENGTH - WITH HANDLES AND WHEELS	622 MM (24.5 IN.)
REMOTE START KIT PART NUMBER INFO	N/A	WIDTH - WITH HANDLES AND WHEELS	379 MM (14.9 IN)
FUEL TANK CAPACITY (LITRES)	5.9 (1.3 IMP. GAL)	COLD CLIMATE TECHNOLOGY	YES

Models and/or colours may not be exactly as shown. Errors and omissions excepted. Specifications are subject to change without notice.

See your Honda Power Equipment dealer for details.

For optimum performance and safety, please read your owner's manual before operating your Honda product. Always wear the appropriate safety gear when operating your Honda.

®/TM — Trademarks of Honda Canada Inc. or used under licence from Honda Motor Co., Ltd. or third parties.