


HS720CC



- Single-stage, semi-self propelled, clears a 50 cm (20 in) width
- Honda GS190, OHC, 4-stroke light commercial engine
- Auger-assisted forward drive
- Folding handle for storage and transportation
- 2 year- Commercial use Distributor's warranty
- Professional contractors and Residential snow removal

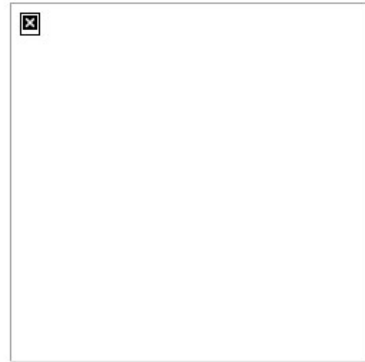

SPECIFICATIONS

Discharge Type	Single stage	Clearing Snow Volume Capacity (Approximate)¹	Up to 45 metric tons/hr (50 tons/hr)
Axle Type	Wheel	Engine Type	4-stroke; OHC; single cylinder
Drive Type	Auger assist	Honda Engine Model	GS190
Speeds	N/A	Displacement	187 cc (11.4 CID)
Maximum Ground Speed	N/A	Ignition System	Transistorized magneto
Clearing Width	50 cm (20 in)	Recoil Starter	Standard
Intake Housing Height	30.0 cm (11.8 in)	Electric Starter	N/A
Auger Diameter	23.0 cm (9.0 in)	Lubrication System	Forced splash
Auger Type	Rubber edge	Oil Capacity	0.58 Litre (20.0 fl. Imp. oz)
Auger Drive	Belt	Recommended Fuel	Regular unleaded gasoline (87 Octane)
Auger Height Adjustment	Scraper bar	Fuel Capacity	1.1 Litre (37.2 fl. Imp. oz)
Chute Rotation	Manual lever	Operational Time per Tankful²	1.0 hour
Chute Turning Radius	220°	Wheel/Tire Size	17.8 cm (7.0 in)
Deflection Control	Manual lever	Overall Length	126.0 cm (49.6 in)
Chute Material	Steel	Overall Width	53.0 cm (20.9 in)
Maximum Throw Distance¹	10 m (32.8 ft)	Overall Height	103.0 cm (40.6 in)
		Dry Weight	38.0 kg (83.8 lb)

Models and/or colours may not be exactly as shown. Errors and omissions excepted. Specifications are subject to change without notice.

See your Honda Power Equipment dealer for details.

For optimum performance and safety, please read your owner's manual before operating your Honda product. Always wear the appropriate safety gear when operating your Honda.

®/TM — Trademarks of Honda Canada Inc. or used under licence from Honda Motor Co., Ltd. or third parties.