


WB20



- Honda GX120T2, four-stroke, OHV, air cooled, single cylinder
- 50 mm (2 in) suction and discharge ports
- 620 litres per minute maximum discharge (136 Imp. gal. per minute)
- De-watering, general purpose pump

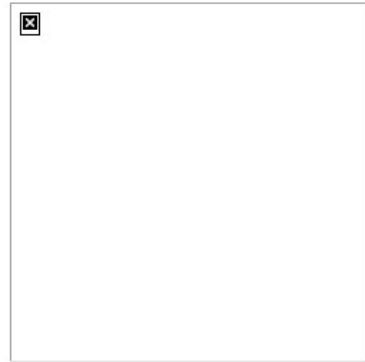

SPECIFICATIONS

WATER PUMP TYPE	De-watering, general purpose	Honda ENGINE	GX120T2
PUMP TYPE	Centrifugal	TYPE	4-stroke, OHV, single cylinder
TYPE	Self-priming	DISPLACEMENT	118 cc (7.20 CID)
SUCTION PORT DIAMETER	50.0 mm (2.0 in)	LUBRICATION SYSTEM	Forced spray
DISCHARGE PORT DIAMETER	50.0 mm (2.0 in)	GOVERNOR	Mechanical centrifugal
LITRES PER MINUTE	620	STARTING SYSTEM	Recoil starter
IMP. GAL. PER MINUTE	136	FUEL TANK CAPACITY	2.0 L (0.44 Imp. gal)
LITRES PER HOUR	37200	OIL ALERT ©	Standard
IMP. GAL. PER HOUR	8160	DRIVE UNIT TYPE	Direct coupled / mechanical seal
TOTAL HEAD	32 m (105 ft)	FRAME TYPE	Full frame
SUCTION HEAD (TOTAL LIFT)	7.5 m (24.6 ft)	LENGTH	49.0 cm (19.3 in)
PRIMING TIME @ 5 M (16.4 FT.)	110 seconds	WIDTH	36.5 cm (14.4 in)
PUMP BODY	Aluminum	HEIGHT	42.0 cm (16.5 in)
IMPELLER	Cast iron	DRY WEIGHT	20.0 kg (44.1 lb)

Models and/or colours may not be exactly as shown. Errors and omissions excepted. Specifications are subject to change without notice.

See your Honda Power Equipment dealer for details.

For optimum performance and safety, please read your owner's manual before operating your Honda product. Always wear the appropriate safety gear when operating your Honda.

©/TM — Trademarks of Honda Canada Inc. or used under licence from Honda Motor Co., Ltd. or third parties.