


# WB30



- Honda GX160T2, four-stroke, OHV, air cooled, single cylinder
- 80 mm (3.1 in) suction and discharge ports
- 1100 litres per minute maximum discharge (242 Imp. gal. per minute)
- De-watering, general purpose pump

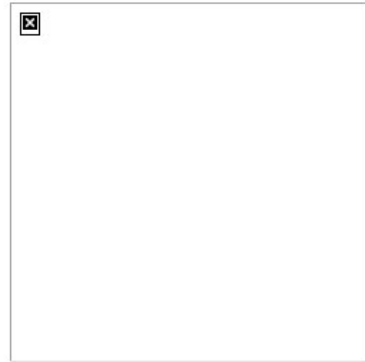

## SPECIFICATIONS

<b>WATER PUMP TYPE</b>	De-watering, general purpose	<b>Honda ENGINE</b>	GX160T2
<b>PUMP</b>	Centrifugal	<b>TYPE</b>	4-stroke, OHV, single cylinder
<b>TYPE</b>	Self-priming	<b>DISPLACEMENT</b>	163 cc (10.00 CID)
<b>SUCTION PORT DIAMETER</b>	80.0 mm (3.1 in)	<b>LUBRICATION SYSTEM</b>	Forced spray
<b>DISCHARGE PORT DIAMETER</b>	80.0 mm (3.1 in)	<b>GOVERNOR</b>	Mechanical centrifugal
<b>LITRES PER MINUTE</b>	1100	<b>STARTING SYSTEM</b>	Recoil starter
<b>IMP. GAL. PER MINUTE</b>	242	<b>FUEL TANK CAPACITY</b>	3.10 L (0.68 Imp. gal)
<b>LITRES PER HOUR</b>	66000	<b>OIL ALERT ©</b>	Standard
<b>IMP. GAL. PER HOUR</b>	14520	<b>DRIVE UNIT TYPE</b>	Direct coupled / mechanical seal
<b>TOTAL HEAD</b>	23 m (75.5 ft)	<b>FRAME TYPE</b>	Full frame
<b>SUCTION HEAD (TOTAL LIFT)</b>	7.5 m (24.6 ft)	<b>LENGTH</b>	51.0 cm (20.1 in)
<b>PRIMING TIME @ 5 M (16.4 FT.)</b>	150 seconds	<b>WIDTH</b>	38.5 cm (15.2 in)
<b>PUMP BODY</b>	Aluminum	<b>HEIGHT</b>	45.5 cm (17.9 in)
<b>IMPELLER</b>	Cast iron	<b>DRY WEIGHT</b>	26.0 kg (57.3 lb)

Models and/or colours may not be exactly as shown. Errors and omissions excepted. Specifications are subject to change without notice.

See your Honda Power Equipment dealer for details.

For optimum performance and safety, please read your owner's manual before operating your Honda product. Always wear the appropriate safety gear when operating your Honda.

©/TM — Trademarks of Honda Canada Inc. or used under licence from Honda Motor Co., Ltd. or third parties.