


WH15



- High output 400 litres per minute (88 Imp. gal. per minute), high pressure (55 psi)
- Honda GX120 OHV engine
- 40 mm (1.5 in) suction and discharge ports
- General water transfer, high pressure and irrigation

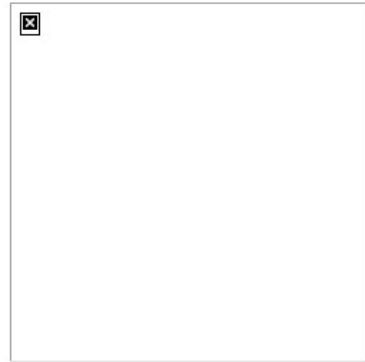

SPECIFICATIONS

WATER PUMP TYPE	High pressure	Honda ENGINE	GX120T2
PUMP	Centrifugal	TYPE	4-stroke, OHV, single cylinder
TYPE	Self-priming	DISPLACEMENT	118 cc (7.20 CID)
SUCTION PORT DIAMETER	40.0 mm (1.5 in)	LUBRICATION SYSTEM	Forced splash
DISCHARGE PORT DIAMETER	40.0 mm (1.5 in)	GOVERNOR	Mechanical centrifugal
LITRES PER MINUTE	400	STARTING SYSTEM	Recoil starter
IMP. GAL. PER MINUTE	88	FUEL TANK CAPACITY	2.00 L (0.44 Imp. gal)
LITRES PER HOUR	24000	OIL ALERT ©	N/A
IMP. GAL. PER HOUR	5280	DRIVE UNIT TYPE	Direct coupled / mechanical seal
TOTAL HEAD	39 m (127 ft)	FRAME TYPE	Handle type, steel base
SUCTION HEAD (TOTAL LIFT)	8 m (26 ft)	LENGTH	41.5 cm (16.3 in)
PRIMING TIME @ 5 M (16.4 FT.)	80 seconds	WIDTH	36.0 cm (14.2 in)
PUMP BODY	Aluminum	HEIGHT	40.5 cm (15.9 in)
IMPELLER	Cast iron	DRY WEIGHT	22.0 kg (48.5 lb)

Models and/or colours may not be exactly as shown. Errors and omissions excepted. Specifications are subject to change without notice.

See your Honda Power Equipment dealer for details.

For optimum performance and safety, please read your owner's manual before operating your Honda product. Always wear the appropriate safety gear when operating your Honda.

©/TM — Trademarks of Honda Canada Inc. or used under licence from Honda Motor Co., Ltd. or third parties.