


WH20



- High output 500 litres per minute (110 Imp. gal. per minute), high pressure (61 psi)
- Honda GX160 OHV engine
- 50 mm (2 in) suction and discharge ports
- General water transfer, high pressure to irrigation

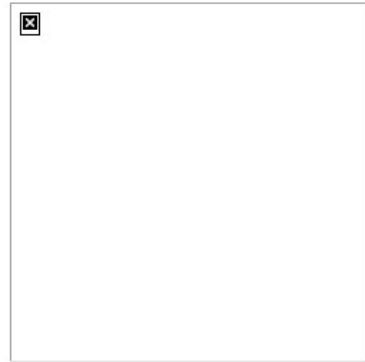

SPECIFICATIONS

WATER PUMP TYPE	High pressure	Honda ENGINE	GX160T2
PUMP	Centrifugal	TYPE	4-stroke, OHV, single cylinder
TYPE	Self-priming	DISPLACEMENT	163 cc (9.95 CID)
SUCTION PORT DIAMETER	50.0 mm (2.0 in)	LUBRICATION SYSTEM	Forced splash
DISCHARGE PORT DIAMETER	50.0 mm (2.0 in)	GOVERNOR	Mechanical centrifugal
LITRES PER MINUTE	500	STARTING SYSTEM	Recoil starter
IMP. GAL. PER MINUTE	110	FUEL TANK CAPACITY	3.10 L (0.68 Imp. gal)
LITRES PER HOUR	30000	OIL ALERT ©	N/A
IMP. GAL. PER HOUR	6600	DRIVE UNIT TYPE	Direct coupled / mechanical seal
TOTAL HEAD	43 m (141 ft)	FRAME TYPE	Handle type, steel base
SUCTION HEAD (TOTAL LIFT)	8 m (26 ft)	LENGTH	42.5 cm (16.7 in)
PRIMING TIME @ 5 M (16.4 FT.)	80 seconds	WIDTH	37.5 cm (14.8 in)
PUMP BODY	Aluminum	HEIGHT	40.5 cm (15.9 in)
IMPELLER	Cast iron	DRY WEIGHT	23.5 kg (51.8 lb)

Models and/or colours may not be exactly as shown. Errors and omissions excepted. Specifications are subject to change without notice.

See your Honda Power Equipment dealer for details.

For optimum performance and safety, please read your owner's manual before operating your Honda product. Always wear the appropriate safety gear when operating your Honda.

©/TM — Trademarks of Honda Canada Inc. or used under licence from Honda Motor Co., Ltd. or third parties.