


Tube Dia.	A		B			C				D				E				Trans. Height*		Wheel Track	
	Length		32° Angle		Max Elev.		32° Angle		Max Elev.		32° Angle		Max Elev.		32° Angle		Max Elev.				
	in	ft	ft	in	ft	in	ft	in	ft	in	ft	in	ft	in	ft	in	ft	in	ft	in	in
8	34	18	21	14	12	11	6	14	6	10	6	12	7	9	66						
8	46	25	30	16	14	15	6	17	6	14	14	14	8		88						
8	55	28	6	36	21	19	9	19	6	16	19	11		108							
8	66	35	43	6	21	22	6	21	6	24	20	12	9	108							
8	72	36	50	28	25	22	25	25	25	25	25	15	3	114							
10	34	17	3	23	6	13	10	10	9	12	10	4	10	8	6	90					
10	66	35	43	6	21	22	6	21	6	24	20	12	9	108							
10	76	36	3	49	6	31	10	26	20	5	24	2	29	5	26	15	5	114			
12	34	17	3	21	13	12	10	9	11	10	4	12	8	3	90						
12	66	34	9	43	25	2	22	1	18	6	23	4	25	2	22	1	12	5	114		
12	72	37	10	48	7	27	8	23	10	20	25	10	27	8	23	10	14	3	135		
12	76	40	51	29	5	25	4	21	27	3	29	5	25	4	14	5	135				
12	82	43	2	55	10	31	5	27	1	22	8	29	3	31	5	27	1	13	10	135	
14	40	20	10	26	8	15	9	13	10	13	3	14	9	12	4	13	2	11	3	90	
14	55	28	11	36	6	21	4	18	8	17	10	19	6	17	7	18	8	11	11	114	
14	66	34	9	43	3	25	2	22	1	18	6	23	4	25	2	22	1	13	3	114	
14	76	40	51	29	5	25	4	21	27	3	29	5	25	4	14	11	135				
14	82	43	2	55	10	31	5	27	1	22	8	29	3	31	5	27	1	15	3	135	

*Transport height measured with the hitch at 15" and the auger level.

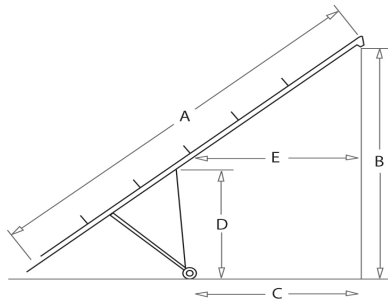

- A Length of Auger
- B Height to Spout - raised position
- C Length of Reach - raised position
- D Ground to Eave
- E Length of Reach - from undercarriage

Minimum Tractor HP Requirements


PTO Augers

- 8" Diameter 0.50 hp per ft (A)
- 10" Diameter 0.75 hp per ft (A)
- 12" Diameter 1.00 hp per ft (A)
- 14" Diameter 1.25 hp per ft (A)

Tube Dia.	A		B			C			D			E			Trans. Height		Wheel Track			
	Length	32° Angle		Max Elev.		32° Angle		Max Elev.		32° Angle		Max Elev.								
in	ft	ft	in	ft	in	ft	in	ft	in	ft	in	ft	in	ft	in	ft	in			
10	62	35	0	43	6	21	0	20	0	21	6	24	0	20	0	20	0	12	6	108
10	72	39	0	48	0	26	0	24	0	23	1	25	0	25	0	24	0	15	6	114
10	82	44	0	58	0	32	0	29	0	25	0	32	0	32	0	29	0	13	6	135

Tube Dia.	A		B			C			D			E			Trans. Height		Wheel Track			
	Length	19° Angle		Max Elev.		19° Angle		Max Elev.		19° Angle		Max Elev.								
in	ft	ft	in	ft	in	ft	in	ft	in	ft	in	ft	in	ft	in	ft	in	ft	in	
12	62	21	6	45	0	32	0	21	0	11	6	23	0	32	0	24	0	11	0	126.5
12	72	26	6	52	0	37	0	26	6	13	6	26	0	37	0	28	0	11	6	125.5
12	82	30	0	56	6	41	0	32	0	15	6	28	6	41	0	35	6	12	0	133.5
12	92	31	6	62	0	46	6	34	6	16	6	31	6	46	6	37	0	13	6	133.5
12	112	38	1	65	7	52	4	43	2	23	6	30	9	33	0	41	7	16	3	120
12	122	41	4	65	10	56	9	50	8	24	5	30	6	39	2	47	7	16	3	120
14	122	41	4	69	6	56	0	50	0	26	9	33	11	35	7	45	9	15	5	120

* Data for 62 to 92 foot models measured at 20° angle and Max (42°)

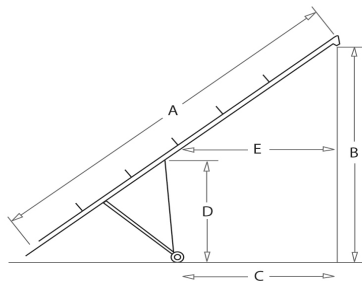

- A Length of Auger
- B Height to Spout - raised position
- C Length of Reach - raised position
- D Ground to Eave
- E Length of Reach - from undercarriage

Minimum Tractor HP Requirements

PTO Augers

- 10" Diameter 0.75 hp per ft (A)
- 12" Diameter 1.00 hp per ft (A)
- 14" Diameter 1.25 hp per ft (A)

Grain Pile Capacities

Auger	Pile Dia. (ft)	Pile Height (ft)	Bushels
1272	82.5	17.5	24800
1282	91.7	19.4	34000
1292	100.0	21.3	44500
12112	113.0	24.0	64200
12122	123.0	26.0	82500
14122	123.0	26.0	82500