





INDEX

1000 & 2000 Series - Features and Options	4
1000 & 2000 Series - Models	6
3000 Series - Features and Options	8
3000 Series - Models	10
4000 Series - Features and Options	12
4000 Series - Models	14
5000 Series - Features and Options	16
5000 Series - Models	18
6000 Series - Features and Options	20
6000 Series - Models	22
SnowWing	24
Razor SnowPusher	26
Scatter Shot	28
6-Way	30
V-Blade	31
Snow Basket & Snow Bucket	31
Undercarriage Mount	32
Specifications	34





New Holland Boomer 3045 with the HLA 2000 SnowBlade

FEATURES



Replaceable, Reversible Cutting Edge

Our cutting edges are designed to be easily replaceable and are reversible to give you twice the life.



Lateral Float

Allows blade to follow ground contours for better clearing performance. (Not available on SP1500 and SP2500 models)



Adjustable Skid Shoes

Allow you to set cutting depth for optimum performance and prolonged cutting edge life.



Spring trip Mouldboard Blade

Allows blade to trip back if struck by hidden object limiting damage.



Mouldboard Profile

Precision engineered curve rolls and folds snow. This reduces sticking, side tracking and spill over.

1000 & 2000 SERIES



HLA 2500 SnowPusher

OPTIONS



Snowblade Marker

Add this to your blade for better visibility and blade position awareness.



Back Drag

Equipped with a steel edge on the back drag, this option is ideal for back dragging away from doors and loading docks for an even cleaner finish.

Available on 1500 and 2500 SnowPushers only.



Curb Runner

Optional on the 2000 SnowBlade, the Curb Runner runs along the front face of the curb, preventing the edge of the blade from catching on any edges.



Boron Cutting Edges

Boron long wearing reversible upgrades provide excellent cutting performance for use in mixed gravel, concrete and asphalt situations.



TURF Pusher Kit

Optional on both the 1500 and 2500, this bolt-on option is ideal for clearing snow from sports fields using artificial turf.

1000 & 2000 SERIES



**MAX OPERATING WEIGHT: 3,000 lbs.
20 - 40 HORSEPOWER**

- 35° manual angle either direction (hydraulic optional)
- Q-tach or direct fit to accept most makes of loaders
- Replaceable, Reversible steel cutting edge
- Replaceable, Reversible rubber cutting edge (OPTIONAL)
- Spring trip mouldboard
- High Tensile AR400 Skid Shoes
- Lateral Float
- Clearing width approx. 1.5' narrower when angled
- 42" - 96" Widths
- 20" High mouldboard



MAX OPERATING WEIGHT: 3,000 lbs.

- Replaceable, Reversible steel cutting edge
- Double sidewall eliminates bulky brace
- Slim brace design for reduced material build-up
- High tensile AR400 adjustable steel skidbars
- 18" Deep fixed endplate
- 54" - 72" Widths
- 20" High mouldboard



**MAX OPERATING WEIGHT: 5,000 lbs.
30 - 50 HORSEPOWER**

- Hydraulic 35° angle either direction
- Q-tach or direct fit to accept most makes of loaders
- Replaceable, Reversible steel cutting edge
- Replaceable, Reversible rubber cutting edge (OPTIONAL)
- Spring trip mouldboard
- High Tensile AR400 Skid Shoes
- Lateral Float
- Clearing width approx. 1.5' narrower when angled
- 60" - 96" Widths
- 24" High mouldboard



MAX OPERATING WEIGHT: 6,000 lbs.

- 1-1/2" x 6" Dura-blade rubber edge (mounted fixed)
- Double sidewall eliminates bulky brace
- High tensile AR400 adjustable steel skidbars
- 30" Deep fixed endplate
- 72" - 96" Widths
- 30" High mouldboard



2 Year Commercial Warranty

Designed for harsh conditions, HLA Snow backs its 3000 series blades with a 2 Year Commercial Warranty.



Kubota L6060 with the HLA 3000 SnowBlade

FEATURES



Replaceable, Reversible Cutting Edge

Our cutting edges are designed to be easily replaceable and are reversible to give you twice the life.



Adjustable Skid Shoes

Allow you to set cutting depth for optimum performance and prolonged cutting edge life.



Mouldboard Profile

Precision engineered curve rolls and folds snow. This reduces sticking, side tracking and spill over.



Crossover Relief Valve

Provides protection against hidden obstacles by redirecting hydraulic pressure, swinging the blade around hazards.



Lateral Float

Allows blade to follow ground contours for better clearing performance. (not available on SP3500 or SP3500X)



Spring Trip Cutting Edge

Allows blade to trip back if struck by hidden object limiting damage.



Floating End Plate Edge

(3200W series Snowwing only)

Floating endplate edges follow surface contour for confident snow clearing.

3000 SERIES



Case SV 300 with
the HLA 3200W SnowWing

OPTIONS



Snowblade Marker

Add this to your blade for better visibility and blade position awareness.



Carbide Cutting Edges

Carbide edges are designed for heavy commercial use, this non reversible cutting edge is suited for heavy duty clearing on concrete or asphalt.



Spill Guard

Available on all 3000 series SnowWings and Angle Blades.



Curb Runner

Optional on the 3000 SnowBlade and the 3200W SnowWing, the Curb Runner runs along the front face of the curb, preventing the edge of the blade or wing from catching on any edges.



Floating Blade Hinge

This option adds a mechanical float to the blade. This allows the blade to better follow the surface contour. The float is designed to be simply locked out when not needed by rolling the blade forward. (Not available on SP3500)



Back Drag

Equipped with a steel edge on the back drag, this option is ideal for back dragging away from doors and loading docks for an even cleaner finish.

Available on 3500 SnowPushers only.



Rubber Cutting Edge


The optional 1-1/2"x6" rubber cutting edge is available for select models.

3000 SERIES



MAX OPERATING WEIGHT: 10,000 lbs.

- Hydraulic 35° angle either direction
- Crossover relief valve protection
- Q-tach or direct fit to accept most makes of loaders
- Replaceable, Reversible steel cutting edge
- Replaceable, Reversible rubber cutting edge (OPTIONAL)
- Spring trip cutting edge
- High Tensile AR400 Skid Shoes
- Lateral Float
- Clearing width approx. 1.5' narrower when angled
- 6' - 10' Widths
- 30" High mouldboard
- 2 Year Commercial Warranty

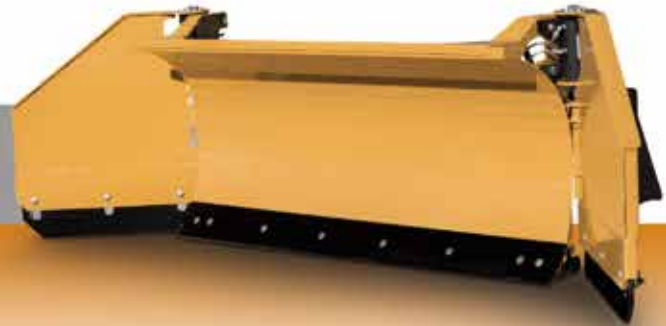

MAX OPERATING WEIGHT: 10,000 lbs.

- 6' to 10' Main mouldboard widths
- Maximum clearing width 5' wider than main mouldboard width
- Minimum road transport width approx. 9" narrower than main mouldboard width
- Wings 30" deep/wide
- 30" High mouldboard
- 35° angle on main mouldboard
- Relief valve on main angle cylinders
- Q-tach or direct fit to accept most makes of loaders
- Replaceable, Reversible steel cutting edge
- Replaceable, Reversible rubber cutting edge (OPTIONAL - Currently not available on wings)
- Spring trip cutting edge on main mouldboard
- High tensile AR400 Skid Shoes
- Lateral float
- Relief valve on wings
- Floating edge on endplate
- Infinite wing adjustment from 0°-180°
- Actuator has 21,000 in-lb Torque at 3000 psi - Patented
- Tire Protection System - Patented
- 2 Year Commercial Warranty



Shown with opt. back drag.

MAX OPERATING WEIGHT: 15,000 lbs.

- Double sidewall eliminates bulky brace
- Replaceable, Reversible steel cutting edge
- Replaceable, Reversible rubber cutting edge (OPTIONAL)
- Spring trip cutting edge
- High tensile AR400 adjustable steel skidbars
- 36" Deep fixed endplate
- 7' - 12' Widths
- 38" High mouldboard
- 2 Year Commercial Warranty



MAX OPERATING WEIGHT: 15,000 lbs.

- Built in back drag
- Bolt-on attachment frame has 3 angle settings (90°, -10°, & +10°)
- Inner moldboard slides on support shaft
- Trip cutting edge
- Compression springs for trip - can be adjusted for tension
- 6' - 8' widths with 4' expansion
- Fixed side skid shoes to assist in keeping blade level so that all cutting edges wear evenly
- Steel or rubber cutting edge options for top and bottom
- Hydraulics - flow divider valve
- 2 Year Commercial Warranty



MAX OPERATING WEIGHT: 10,000 lbs.

- Spring trip on cutting edge
- 30" high mould board
- Lateral float
- Reversible cutting edge
- Adjustable skid shoes
- Cross over relief valve protection
- 6' - 10' main mouldboard widths
- Maximum clearing width 5' wider than main mould board width
- Wings 30" deep/wide
- 2 Year Commercial Warranty
- Infinite wing adjustment from 0° - 180°
- Actuator has 21,000 in-lb Torque at 3000 psi - Patented



New Holland T6.165 with the HLA 4200W SnowWing

2 Year Commercial Warranty

Designed for harsh conditions, HLA Snow backs its 4000 series blades with a 2 Year Commercial Warranty.

FEATURES



Replaceable, Reversible Cutting Edge

Our cutting edges are designed to be easily replaceable and are reversible to give you twice the life.



Skid Shoes

AR400 high tensile Skid Shoes for optimum performance and prolonged cutting edge life.



Mouldboard Profile

Precision engineered curve rolls and folds snow. This reduces sticking, side tracking and spill over.



Crossover Relief Valve

Provides protection against hidden obstacles by redirecting hydraulic pressure, swinging the blade around hazards.



Lateral Float

Allows blade to follow ground contours for better clearing performance. (Not available on SP4500)



Spring Trip Cutting Edge

Allows blade to trip back if struck by hidden object limiting damage.



Floating End Plate Edges (SnowWing Only)

Floating endplate edges follow the surface contour for confident snow clearing.



4000 SERIES

CAT 420D Loader Backhoe with the HLA 4000 SnowBlade

OPTIONS



High Tensile Long Wear Skid Shoes

For heavy use situations we suggest our high tensile steel, long wear Skid Shoes. These provide excellent longevity and performance suited for heavy duty clearing on concrete or asphalt.



Snowblade Marker

Add this to your blade for better visibility and blade position awareness.



Carbide Cutting Edges

Carbide edges are designed for heavy commercial use, this non reversible cutting edge is suited for heavy duty clearing on concrete or asphalt.



Curb Runner

Optional on the 4000 SnowBlade and the 4200W SnowWing, the Curb Runner runs along the front face of the curb, preventing the edge of the blade or wing from catching on any edges.



Floating Blade Hinge

This option adds a mechanical float to the blade. This allows the blade to better follow the surface contour. The float is designed to be simply locked out when not needed by rolling the blade forward. (Not available on SP4500)



Back Drag

Equipped with a steel edge on the back drag, this option is ideal for back dragging away from doors and loading docks for an even cleaner finish.

Available on 4500 SnowPushers only.



Spill Guard (Optional)

Available on all 4000 series SnowWings and Angle Blades.



Rubber Cutting Edge

The optional 1-1/2"x8" rubber cutting edge is available for select models. Sizing may not be exactly as shown.

4000 SERIES



MAX OPERATING WEIGHT: 25,000 lbs.

- Hydraulic 35° angle either direction
- Crossover relief valve protection
- Q-tach or direct fit to accept most makes of loaders
- Replaceable, Reversible steel cutting edge
- Replaceable, Reversible rubber cutting edge (OPTIONAL)
- Spring trip cutting edge
- High Tensile AR400 Skid Shoes
- Lateral Float
- Clearing width approx. 1.5' narrower when angled
- 9' - 14' Widths
- 34" High mouldboard
- 2 Year Commercial Warranty



MAX OPERATING WEIGHT: 25,000 lbs.

- 8' to 14' Main mouldboard widths
- Maximum clearing width 6' wider than main mouldboard width
- Minimum road transport width approx. 9" narrower than main mouldboard width
- Wings 36" deep/wide
- 34" High mouldboard
- 35° angle on main mouldboard
- Relief valve on main angle cylinders
- Q-tach or direct fit to accept most makes of loaders
- Replaceable, Reversible steel cutting edge
- Replaceable, Reversible rubber cutting edge (OPTIONAL - Currently not available on wings)
- Spring trip cutting edge on main mouldboard
- High tensile AR400 Skid Shoes
- Lateral float
- Relief valve on wings
- Floating edge on endplate
- Infinite wing adjustment from 0°-180°
- Actuator has 38,720 in-lb Torque at 3000 psi - Patented
- Tire Protection System - Patented
- Nitrate rods on angle cylinders
- 2 Year Commercial Warranty



MAX OPERATING WEIGHT: 25,000 lbs.

- 8' to 14' Main mouldboard widths
- Maximum clearing width 10' wider than main mouldboard width
- Minimum road transport width approx. 9" narrower than main mouldboard width
- Wings 60" deep/wide
- 34" High mouldboard
- 35° angle on main mouldboard
- Relief valve on main angle cylinders
- Q-tach or direct fit to accept most makes of loaders
- Replaceable, Reversible steel cutting edge
- Replaceable, Reversible rubber cutting edge (OPTIONAL - Currently not available on wings)
- Spring trip cutting edge on main mouldboard
- High tensile AR400 Skid Shoes
- Lateral float
- Relief valve on wings
- Floating edge on endplate
- Infinite wing adjustment from 0°-180°
- Actuator has 54,200 in. lb. Torque at 3000 psi - Patented
- Tire Protection System - Patented
- Great for large sites where greater clearing width is required while being able to narrow down for smaller areas
- Comes with removable top sections on wings to allow for clearance under 5th wheel pins on trailers
- Nitrate rods on angle cylinders
- 2 Year Commercial Warranty



MAX OPERATING WEIGHT: 25,000 lbs.

- Replaceable, Reversible steel cutting edge
- Replaceable, Reversible rubber cutting edge (OPTIONAL)
- Spring trip cutting edge
- Bucket edge mount or Q-tach available
- 36" Deep fixed endplate
- 10' - 14' Widths
- 34" High mouldboard
- 2 Year Commercial Warranty



Case 721F with the HLA 5200W SnowWing



2 Year Commercial Warranty

Designed for harsh conditions, HLA Snow backs its 5000 series blades with a 2 Year Commercial Warranty.

FEATURES



Replaceable, Reversible Cutting Edge

Our cutting edges are designed to be easily replaceable and are reversible to give you twice the life.



Lateral Float

Allows blade to follow ground contours for better clearing performance. (Not available on SP5500)



Skid Shoes

AR400 high tensile Skid Shoes for optimum performance and prolonged cutting edge life.




Spring Trip Cutting Edge

Allows blade to trip back if struck by hidden object limiting damage.



Mouldboard Profile

Precision engineered curve rolls and folds snow. This reduces sticking, side tracking and spill over.



Floating End Plate Edges
(SnowWing Only)

Floating endplate edges follow the surface contour for confident snow clearing.



Crossover Relief Valve

Provides protection against hidden obstacles by redirecting hydraulic pressure, swinging the blade around hazards.

5000 SERIES



Volvo L70G with the HLA 5205W SnowWing with Contour Option

OPTIONS



High Tensile Long Wear Skid Shoes

For heavy use situations we suggest our high tensile steel, long wear Skid Shoes. These provide excellent longevity and performance suited for heavy duty clearing on concrete or asphalt.



Snowblade Marker

Add this to your blade for better visibility and blade position awareness.



Carbide Cutting Edges

Carbide edges are designed for heavy commercial use, this non reversible cutting edge is suited for heavy duty clearing on concrete or asphalt.



Curb Runner

Optional on the 5000 SnowBlade and the 5200W SnowWing, the Curb Runner runs along the front face of the curb, preventing the edge of the blade or wing from catching on any edges.



Floating Blade Hinge

This option adds a mechanical float to the blade. This allows the blade to better follow the surface contour. The float is designed to be simply locked out when not needed by rolling the blade forward. (Not available on SP5500)



Back Drag

Equipped with a steel edge on the back drag, this option is ideal for back dragging away from doors and loading docks for an even cleaner finish.

Available on 5500 SnowPushers only.



Spill Guard (Optional)

Available on all 5000 series SnowWings and Angle Blades.



Rubber Cutting Edge

The optional 1-1/2"x8" rubber cutting edge is available for select models. Sizing may not be exactly as shown.

5000 SERIES



MAX OPERATING WEIGHT: 40,000 lbs.

- Hydraulic 35° angle either direction
- Crossover relief valve protection
- Replaceable, Reversible steel cutting edge
- Replaceable, Reversible rubber cutting edge (OPTIONAL)
- Spring trip cutting edge
- High Tensile AR400 Skid Shoes
- Q-tach or direct fit to accept most makes of loaders
- Clearing width approx. 1.5' narrower when angled
- 9' - 18' Widths
- 42" High mouldboard
- Nitrate rods on angle cylinders
- Two 3x16 angle cylinders
- 2 Year Commercial Warranty



MAX OPERATING WEIGHT: 40,000 lbs.

- 9' to 16' Main mouldboard widths
- Maximum clearing width 6' wider than main mouldboard width
- Minimum road transport width approx. 9" narrower than main mouldboard width
- Wings 36" deep/wide
- 42" high mouldboard
- 35° angle on main mouldboard
- Relief valve on main angle cylinders
- Q-tach or direct fit to accept most makes of loaders
- Replaceable, Reversible steel cutting edge
- Replaceable, Reversible rubber cutting edge (OPTIONAL - Currently not available on wings)
- Spring trip cutting edge on main mouldboard
- High tensile AR400 Skid Shoes
- Lateral float
- Relief valve on wings
- Floating edge on endplate
- Infinite wing adjustment from 0°-180°
- Actuator has 38,720 in. lb. Torque at 3000 psi - Patented
- Tire Protection System - Patented
- Nitrate rods on angle cylinders
- 2 Year Commercial Warranty



MAX OPERATING WEIGHT: 40,000 lbs.

- 9' to 16' Main mouldboard widths
- Maximum clearing width 10' wider than main mouldboard width
- Minimum road transport width approx. 9" narrower than main mouldboard width
- Wings 60" deep/wide
- 42" high mouldboard
- 35° angle on main mouldboard
- Relief valve on main angle cylinders
- Q-tach or direct fit to accept most makes of loaders
- Replaceable, Reversible steel cutting edge
- Replaceable, Reversible rubber cutting edge (OPTIONAL - Currently not available on wings)
- Spring trip cutting edge on main mouldboard
- High tensile AR400 Skid Shoes
- Lateral float
- Relief valve on wings
- Floating edge on endplate
- Infinite wing adjustment from 0° - 180°
- Actuator has 54,200 in. lb. Torque at 3,000 PSI - Patented
- Tire Protection System - Patented
- Nitrate rods on angle cylinders
- Great for large sites where greater clearing width is required while being able to narrow down for smaller areas
- Comes with removable top sections on wings to allow for clearance under 5th wheel pins on trailers
- 2 Year Commercial Warranty



MAX OPERATING WEIGHT: 40,000 lbs.

- Replaceable, Reversible steel cutting edge
- Replaceable, Reversible rubber cutting edge (OPTIONAL)
- Spring trip cutting edge
- Bucket edge mount or Q-tach available
- 44" Deep fixed endplate
- 12' - 18' Widths
- 42" High mouldboard
- 2 Year Commercial Warranty



2 Year Commercial Warranty

Designed for harsh conditions, HLA Snow backs its 6000 series blades with a 2 Year Commercial Warranty.



Volvo L70G with the HLA 6205W SnowWing

FEATURES



Replaceable, Reversible Cutting Edge

Our cutting edges are designed to be easily replaceable and are reversible to give you twice the life.



Skid Shoes

AR400 high tensile Skid Shoes for optimum performance and prolonged cutting edge life.



Mouldboard Profile

Precision engineered curve rolls and folds snow. This reduces sticking, side tracking and spill over.



Crossover Relief Valve

Provides protection against hidden obstacles by redirecting hydraulic pressure, swinging the blade around hazards.



Lateral Float

Allows blade to follow ground contours for better clearing performance.



Spring Trip Cutting Edge

Allows blade to trip back if struck by hidden object limiting damage.



Floating End Plate Edges

(SnowWing Only)

Floating endplate edges follow the surface contour for confident snow clearing.



Floating Blade Hinge

This feature adds a mechanical float to the blade. This allows the blade to better follow the surface contour. The float is designed to be simply locked out when not needed by rolling the blade forward.



6000 SERIES

Case 721F with
the HLA 6000 SnowBlade

OPTIONS



High Tensile Long Wear Skid Shoes

For heavy use situations we suggest our high tensile steel, long wear Skid Shoes. These provide excellent longevity and performance suited for heavy duty clearing on concrete or asphalt.



Snowblade Marker

Add this to your blade for better visibility and blade position awareness.



Carbide Cutting Edges

Carbide edges are designed for heavy commercial use, this non reversible cutting edge is suited for heavy duty clearing on concrete or asphalt.



Curb Runner

Optional on the 6000 SnowBlade, the Curb Runner runs along the front face of the curb, preventing the edge of the blade from catching on any edges.



Spill Guard (Optional)

Available on all 6000 series SnowWings and Angle Blades.



Rubber Cutting Edge

The optional 1-1/2"x8" rubber cutting edge is available for select models. Sizing may not be exactly as shown.

6000 SERIES



MAX OPERATING WEIGHT: 60,000 lbs.

- Hydraulic 35° angle either direction
- Crossover relief valve protection
- Replaceable, Reversible steel cutting edge
- Replaceable, Reversible rubber cutting edge (OPTIONAL)
- Spring trip cutting edge
- High Tensile AR400 Skid Shoes
- Q-tach or direct fit to accept most makes of loaders
- Clearing width approx. 1.5' narrower when angled
- 10' - 20' Widths
- 53" High mouldboard
- Nitrate rods on angle cylinders
- Two 3x16 angle cylinders
- 2 Year Commercial Warranty
- Floating Hinge



MAX OPERATING WEIGHT: 60,000 lbs.

- 10' to 20' Main mouldboard widths
- Maximum clearing width 10' wider than main mouldboard width
- Minimum road transport width approx. 9" narrower than main mouldboard width
- Wings 60" deep/wide
- 53" high mouldboard
- 35° angle on main mouldboard
- Relief valve on main angle cylinders
- Q-tach or direct fit to accept most makes of loaders
- Replaceable, Reversible steel cutting edge
- Replaceable, Reversible rubber cutting edge (OPTIONAL - Currently not available on wings)
- Spring trip cutting edge on main mouldboard
- High tensile AR400 Skid Shoes
- Lateral float
- Relief valve on wings
- Floating edge on endplate
- Infinite wing adjustment from 0° - 180°
- Actuator has 54,200 in. lb. Torque at 3,000 PSI - Patented
- Tire Protection System - Patented
- Nitrate rods on angle cylinders
- Great for large sites where greater clearing width is required while being able to narrow down for smaller areas
- 2 Year Commercial Warranty
- Floating Hinge



SNOWWING
HLA(SNOW)



FEATURES



Rotary Actuators - PATENTED

These rugged units come from the construction industry and deliver up to 21,000 - 54,200 in. lbs of torque (depending on model) to hold the wings in place.



Floating End Plate Edges

Floating endplate edges follow the surface contour for confident snow clearing.




180° Rotation

Infinitely and independently adjustable, our wings are rugged enough to stay put and give you control of any situation.



Crossover Relief Valve

Provides protection against hidden obstacles by redirecting hydraulic pressure, swinging the blade around hazards.

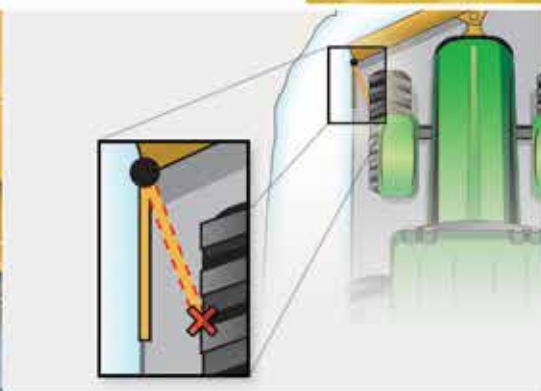

Tire Protection System - PATENTED

Our Tire Protection System means that you get the most out of your Snow Wing while keeping the air in your tires. The system automatically protects from unintended damaging collisions between your front tires and end plates. The end plates are automatically rotated away from the tires so the operator can focus on clearing snow and worry less about damaging equipment.

OPTIONS



Wired Joystick Control

Wired joystick allows all blade functions to be operated from a single joystick.



Curb Runner

Optional on select SnowBlades and SnowWings, the Curb Runner runs along the front face of the curb, preventing the edge of the blade or wing from catching on any edges.



Spill Guard

Optional on select SnowWings and Angle Blades.

The Wingblade design allows you to handily change from a traditional box blade to a straight blade, with the added bonus of extra clearing width. But it doesn't stop there: the endplates are hydraulically-controlled and equipped with industry-proven rotary actuators, giving you rugged and limitless control within the massive 180 degree rotation. This means you can use your blade on an angle with one end open and the other parallel to

the direction you are driving. This allows you to get closer to buildings and parking spaces with less chance of damage and better clearing results. With the endplates in their full open position, the blade can be used as a reverse box blade allowing you to back drag snow for full clearing even in the tightest of spaces.



Box Blade

Traditional box blade.



Straight Blade

Up to 10' on select models of extra clearing width when fully extended.



Minimum Road Transfer Width

Approx. 9" narrower than main mouldboard width.



Reverse Box Blade

In full position.

CONTOURWING DESIGN

DESIGNED FOR TRUCK LOTS

Available only on the 4205W and 5205W SnowWing

Removeable Upper Wing Tip

The five foot wing models in the SnowWing lineup reach even further, requiring fewer passes to finish each job.

Each five foot wing model comes standard with removeable upper wing tips. When removed, it forms a contour wing, designed to go under the fifth pin of trucks, clearing those hard to reach places for an even cleaner finish.



HLA RAZOR SNOWPUSHER

Easily clear snow with a new Razor from HLA Snow.

Get a cleaner shave in one pass with the Razor Snow Pusher from HLA Snow. Each 24" wide segment of the mouldboard floats independently allowing it to adjust to the contours of the ground.

Each segment is equipped with a steel cutting edge, ensuring each blade cleanly shaves the snow as it passes across the ground. The cutting edges are backed with a spring trip, flipping the edge back as it strikes an obstacle. This not only reduces hang up, but also helps to prevent unnecessary shock to the operator and the equipment. When damaged or worn, the cutting edge can be easily reversed or replaced individually as required.

The dual tripping mechanism is built around a single expansion

spring for each of the 24" segments. Increasing or decreasing the spring tension allows the segment trip to be adjusted to suit the environment you're clearing, making this the best tool in your fleet.

A durable frame provides all the support that the blades need to handle tough jobs such as stacking. Parallel square tubes provide a solid anchor point for the parallel linkage, ensuring that the mouldboards maintain perfect vertical travel throughout the tripping action.

Razor Snow Pushers from HLA Snow, it's a black or white decision.

Part #	Width (ft.)	Number of Segments	Mouldboard Height (in.)	Weight (lbs.)
RZ450010	10	5	34	2,770
RZ450012	12	6	34	3,135
RZ450014	14	7	34	3,510
RZ450016	16	8	34	3,880

MAX OPERATING WEIGHT: 25,000 lbs.

Part #	Width (ft.)	Number of Segments	Mouldboard Height (in.)	Weight (lbs.)
RZ650012	12	6	48	4,485
RZ650014	14	7	48	5,000
RZ650016	16	8	48	5,520
RZ650018	18	9	48	6,035
RZ650020	20	10	48	6,820
RZ650022	22	11	48	7,365
RZ650024	24	12	48	7,910

MAX OPERATING WEIGHT: 60,000 lbs.



1 24" Floating Segments

Floating segments rise and fall to follow the terrain for a total float of 6 inches.

2 Steel Cutting Edge

Our cutting edges are designed to be easily replaceable and are reversible to give you twice the life.

3 Spring Trip

Each segment features a spring trip cutting edge that activates when an obstacle is struck.

4 Float Range Indicator

Helps the operator set proper loader height for optimal section travel.

5 Square Tube Frame

Solid structure prevents flexing.

6 Steel Linkage

Each segment is attached to the frame using parallel steel linkages to maintain mouldboard alignment and allows for stacking.

7 Bushings

Greaseless bushings on linkage pins for low maintenance operation.

8 End Plates

End plates float with the end segment and feature a floating skidbar that follows ground contour.

9 Flexible Mount Options

Allows a wide range of adaptors to attach to the Razor.



SCATTER SHOT

UP TO
40 FOOT
BROADCAST



SINGLESHOT HS100

The Scattershot makes short work of your spreading tasks. This broadcast spreader comes in Singleshot and Doubleshot models.

The ice won't know what hit him when you take aim with the Singleshot broadcast spreader. The half yard hopper is also a durable scoop ready to load and reload at a moment's notice (on select models).

Made of durable galvanized steel, the Scattershot can handle what it dishes out. From sand to salt the internal agitators prevent material from clumping or building up so you get the most out of every load.

Add the optional 3 foot drop shield and this broadcast spreader is ready to take on paths and sidewalks without a lot of overspray.

UP TO
60 FOOT
BROADCAST




DOUBLESHOT HS200

Unload both barrels on your biggest jobs with the Doubleshot. This dual broadcast spreader can spread up to 60 feet wide. The twin hoppers are combined into a yard and a half capacity scoop that self loads with ease on select models.

Give your plow all the back up it needs with the 3-point mount. Now you can plow, load and spread all with one machine.



HS100 Skidsteer



HS100 3PH



HS100 PTO



HS200



HS200 3PH

Model	Self Loading	Capacity	Width (in.)	Height (in.)	Depth (in.)	Weight (lb.)	Hydraulic
HS100							
HS100 Skidsteer	Yes	1/2 Yard	48"	44"	36"	410 lb.	Yes
HS100 3PH	Yes	1/2 Yard	48"	44"	36"	505 lb.	Yes
HS100 PTO	No	1/2 Yard	48"	44"	36"	420 lb.	No
HS200							
HS200	Yes	1-1/2 Yard	86"	60"	42"	1,320 lb.	Yes
HS200 3PH	Yes	1-1/2 Yard	86"	60"	42"	1,685 lb.	Yes

ALL MODELS AVAILABLE IN LOADER MOUNT OR 3-POINT HITCH


FEATURES



Manual Flow Rate Adjustment Slider



Floating Agitator

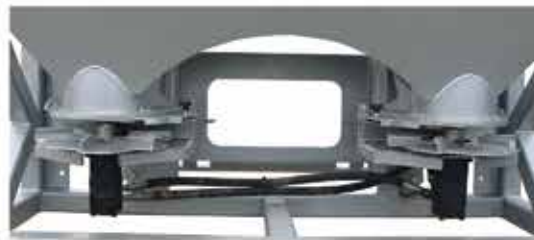

Hydraulic Spinners




Spinner Speed Control

OPTIONS



Hydraulic Shut-Off Gate



36" Sidewalk Drop Shield

V-BLADES



Clean your sidewalks easily and effectively using the Six-Way blade from HLA Snow. Both sides of the Six-Way blade can be moved independently to form an angle blade, scoop, or V-Blade to ensure you have the right blade for every condition.

The Six-Way comes standard with spring trip cutting edges, ensuring the cutting edge springs back when the blade strikes an obstacle reducing damage to both the blade and equipment. Each model also comes standard with individually replaceable and reversible steel cutting edges, allowing you to get twice the life before needing to replace them when required.



- Ideal sidewalk blade for compact tractors & skidsteers
- C/w 5/8" AR600 cutting edge
- Replaceable steel cutting edge
- Spring trip cutting edge
- 35 Degree angle with cross over relief valve protection
- 30" High mouldboard with lateral float
- 54" to 84" Widths (6" increments)
- C/w single diverter valve
- High Tensile AR400 Skid Shoes
- Optional Carbide Edge

MAX OPERATING WEIGHT: 10,000 lbs.



- Ideal for small roadways & driveways
- Replaceable, Reversible steel cutting edge
- Spring trip cutting edge
- 35 Degree angle with cross over relief valve protection
- 34" High mouldboard with lateral float
- 96" to 144" Widths
- Standard AR400 cutting edge with optional carbide cutting edge
- C/w single diverter valve
- High Tensile AR400 Skid Shoes

MAX OPERATING WEIGHT: 25,000 lbs.



Scoop



V-Blade



Angle Blade (right & left)

V-BLADE

- Replaceable steel cutting edge
- Q-tach or direct fit to accept most makes of loaders
- 48" to 60" Widths (6" increments)
- 24" high mouldboard

MAX OPERATING WEIGHT: 10,000 lbs.



Front Shoe

Front Shoe guides blade over obstacles, avoiding damage to equipment and property.



Sliding Hinge

Sliding Hinge allows blade to follow contour of surface.

SNOW BUCKET

SNOW BASKET



- 38" Deep
- 32" High
- 60" to 120" Widths (6" increments)

MAX OPERATING WEIGHT: 20,000 lbs.
50 - 125 HORSEPOWER



- Available widths 60" - 120"
- Profile 39" Deep and 32" High
- Tapered Endplates
- Tall rounded endplates for increased capacity
- Excellent operator visibility

MAX OPERATING WEIGHT: 20,000 lbs.
50 - 125 HORSEPOWER



Heavy Duty Grating


Allows extra visibility for the driver.

UNDERCARRIAGE MOUNT



① Power and Control

- Heavy duty parallel linkage for optimum lifting height
- Q-Tach from blade to undermount is standard
- Euro mount standard on the 3000 and 4000 series
- Industrial mount standard on the 5000 series
- Package includes all mounting hardware and hose kits
- Mounts available for most makes, call dealer for details
- Soft ride accumulator

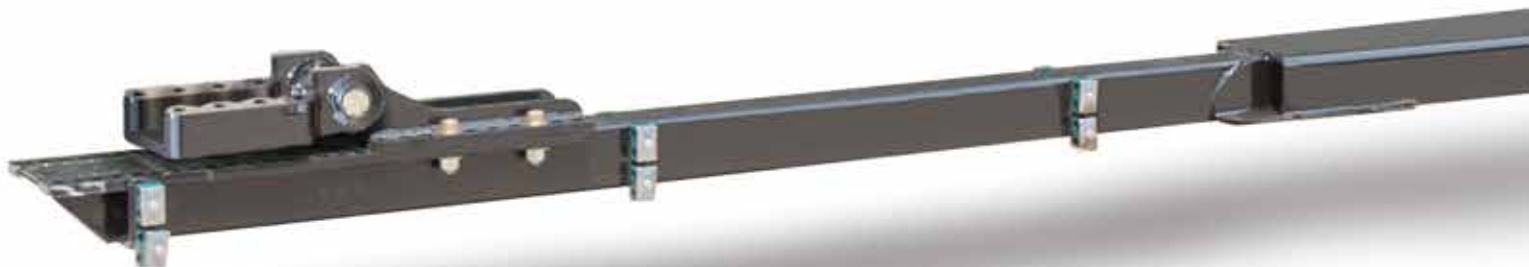



The HLA Undercarriage Mount is securely connected to both the front and rear of your tractor. Relying on the rear of the mount, the force is pushed through the drawbar from the front of the mount providing incredible pushing strength. Also using parallel linkage, you can rest assured that the blade will always remain parallel to the ground whether it's raised for stacking snow or at full angle.

Available for most makes, the undercarriage mount includes all hardware and hose kits allowing for easy installation.

Models

MODEL	PART #	WEIGHT
2000 Series	SB2000DM	400 lbs.
3000 Series	SB3000DM	580 lbs.
4000 Series	SB4000DM	1,020 lbs.
5000 Series	SB5000DM	1,860 lbs.



2 Parallel Vertical Lift

- Blade remains parallel to ground even at full angle and raised
- Extra height for piling snow

SPECIFICATIONS

SNOWBLADES

Part #	Width (in.)	Mouldboard Height (in.)	Weight (lbs.)	Max Operating Weight
1000 Series Snowblades				
SB100042	42	20	350	3,000 lbs.
SB100048	48	20	365	
SB100054	54	20	375	
SB100060	60	20	385	
SB100066	66	20	400	
SB100072	72	20	410	
SB100078	78	20	420	
SB100084	84	20	440	
SB100090	90	20	450	
SB100096	96	20	465	
2000 Series Snowblades				
SB200060	60	24	550	5,000 lbs.
SB200072	72	24	575	
SB200078	78	24	595	
SB200084	84	24	610	
SB200090	90	24	620	
SB200096	96	24	635	
3000 Series Snowblades				
SB300006	72	30	950	10,000 lbs.
SB300007	84	30	1,010	
SB300008	96	30	1,060	
SB300009	108	30	1,110	
SB300010	120	30	1,160	
4000 Series Snowblades				
SB400009	108	34	1,935	25,000 lbs.
SB400010	120	34	2,035	
SB400012	144	34	2,225	
SB400014	168	34	2,505	
5000 Series Snowblades				
SB500009	108	42	2,445	40,000 lbs.
SB500010	120	42	2,550	
SB500012	144	42	2,815	
SB500014	168	42	3,095	
SB500016	192	42	3,405	
SB500018	216	42	3,700	
6000 Series Snowblades				
SB600010	120	53	3,285	60,000 lbs.
SB600012	144	53	3,635	
SB600014	168	53	3,900	
SB600016	192	53	4,345	
SB600018	216	53	4,650	
SB600020	240	53	5,005	

SNOWPUSHERS

Part #	Width (in.)	Mouldboard Height (in.)	Weight (lbs.)	Max Operating Weight
1500 Series Snowpushers				
SP150054	54	20	310	3,000 lbs.
SP150060	60	20	325	
SP150066	66	20	335	
SP150072	72	20	350	
2500 Series Snowpushers				
SP250072	72	30	595	6,000 lbs.
SP250084	84	30	640	
SP250096	96	30	675	
3500 Series Snowpushers				
SP350007	84	38	990	15,000 lbs.
SP350008	96	38	1,060	
SP350009	108	38	1,100	
SP350010	120	38	1,175	
SP350012	144	38	1,350	
4500 Series Snowpushers				
SP450010	120	34	2,075	25,000 lbs.
SP450012	144	34	2,265	
SP450014	168	34	2,460	
5500 Series Snowpushers				
SP550012	144	42	2,905	40,000 lbs.
SP550014	168	42	3,125	
SP550016	192	42	3,360	
SP550018	216	42	3,795	
3500X Series Snowpushers				
SP3500X610	72 / 120	30	1,525	15,000 lbs.
SP3500X711	84 / 132	30	1,605	
SP3500X812	96 / 144	30	1,690	
3500W Series Snowpushers				
SP3500W611	72 / 132	30	1,450	10,000 lbs.
SP3500W712	84 / 144	30	1,515	
SP3500W813	96 / 156	30	1,575	
SP3500W914	108 / 168	30	1,630	
SP3500W1015	120 / 180	30	1,690	

SNOWINGS

Part #	Width Closed (in.)	Width Open (in.)	Mouldboard Height (in.)	Weight (lbs.)	Max Operating Weight
3200W Series Snowwing					
SB3200W611	72	132	30	1,640	10,000 lbs.
SB3200W712	84	144	30	1,705	
SB3200W813	96	156	30	1,765	
SB3200W914	108	168	30	1,820	
SB3200W1015	120	180	30	1,880	
4200W Series Snowwing					
SB4200W814	93.5	165	34	2,705	25,000 lbs.
SB4200W915	108	180	34	2,865	
SB4200W1016	120	192	34	2,975	
SB4200W1218	144	216	34	3,175	
SB4200W1420	168	240	34	3,425	
4205W Series Snowwing					
SB4205W818	93.5	213.5	34	3,290	25,000 lbs.
SB4205W919	108	228	34	3,435	
SB4205W1020	120	240	34	3,550	
SB4205W1222	144	264	34	3,745	
SB4205W1424	168	288	34	4,035	
5200W Series Snowwing					
SB5200W915	108	180	42	3,440	40,000 lbs.
SB5200W1016	120	192	42	3,605	
SB5200W1218	144	216	42	3,865	
SB5200W1420	168	240	42	4,155	
SB5200W1622	192	264	42	4,475	
5205W Series Snowwing					
SB5205W919	108	228	42	4,115	40,000 lbs.
SB5205W1020	120	240	42	4,245	
SB5205W1222	144	264	42	4,510	
SB5205W1424	168	288	42	4,800	
SB5205W1626	192	312	42	5,120	
6205W Series Snowwing					
SB6205W1020	120	240	53	5,050	60,000 lbs.
SB6205W1222	144	264	53	5,375	
SB6205W1424	168	288	53	5,645	
SB6205W1626	192	312	53	6,100	
SB6205W1828	216	336	53	6,470	
SB6205W2030	240	360	53	6,835	

RAZOR SNOWPUSHERS

Part #	Width (ft.)	Segment Width (in.)	Mouldboard Height (in.)	Weight (lbs.)	Max Operating Weight
RZ4500 Razor Snow Pusher					
RZ450010	10	24	34	2,770	25,000 lbs.
RZ450012	12	24	34	3,135	
RZ450014	14	24	34	3,510	
RZ450016	16	24	34	3,880	
RZ6500 Razor Snow Pusher					
RZ650012	12	24	48	4,485	60,000 lbs.
RZ650014	14	24	48	5,000	
RZ650016	16	24	48	5,520	
RZ650018	18	24	48	6,035	
RZ650020	20	24	48	6,820	
RZ650022	22	24	48	7,365	
RZ650024	24	24	48	7,910	

SIX-WAY BLADES

Part #	Width Straight (in.)	Width Veed (in.)	Width Scooped (in.)	Mouldboard Height (in.)	Weight (lbs.)	Max Operating Weight
3600 Six-Way Blade						
SB3600V54	54	51	39	30	695	10,000 lbs.
SB3600V60	60	56	43	30	720	
SB3600V66	66	61	48	30	740	
SB3600V72	72	66	53	30	765	
SB3600V78	78	71	58	30	785	
SB3600V84	84	76	63	30	805	
4600 Six-Way Blade						
SB4600V08	96	84	75	34	1,635	25,000 lbs.
SB4600V09	108	94	85	34	1,720	
SB4600V10	120	103	95	34	1,805	
SB4600V12	144	113	105	34	1,975	

V-BLADES

Part #	Width Closed (in.)	Mouldboard Height (in.)	Weight (lbs.)	Max Operating Weight
V-Blade				
VP48 (Std.)	48	24	495	10,000 lbs.
VP54 (Std.)	54	24	515	
VP60 (Std.)	60	24	540	


Stay in the Cab it's an

HLA

For the last 20 years HLA Snow has been committed to providing our customers with innovative equipment. With a comprehensive line up of snow and ice management tools HLA Snow has the right blade, bucket, or spreader for your team.

HLA Snow products are engineered and field tested by our dedicated staff. They bear the cold and scrape their knuckles in real world environments to ensure that when you receive your HLA product, it performs as promised.

On those cold dark nights when the snow won't stop falling, you can stay in the cab and rest easy because it's an HLA.

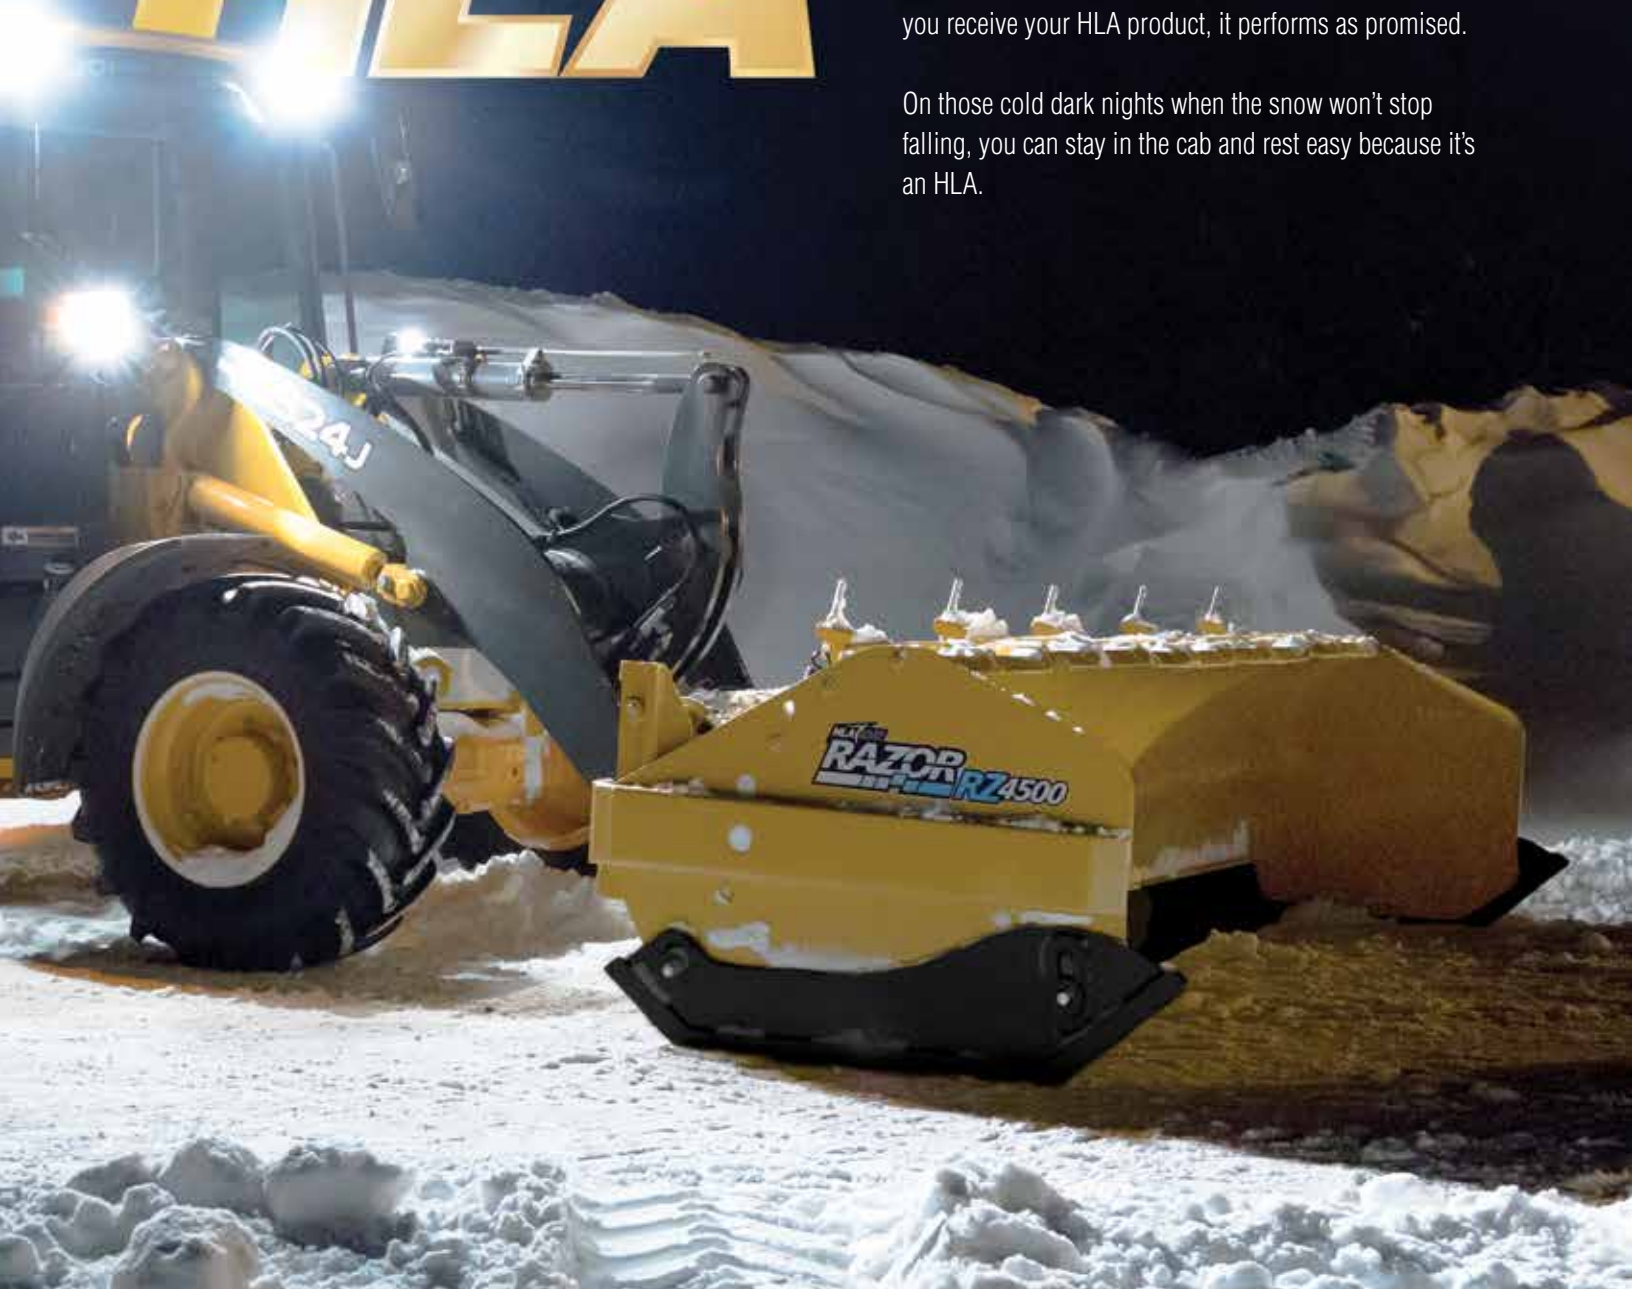

8082 Road 129, R.R.#3
Listowel, ON, Canada N4W 3G8
Tel. (519) 291-4162
Toll Free (866) 567-4162
Fax (519) 291-5388
sales@horstwelding.com

www.horstwelding.com
www.hlasnow.com

Authorized Dealer: