



# STAND-ON SERIES



**SUPER S**

AVAILABLE DECK SIZES  
**36" - 60"**



**SUPER 88**

AVAILABLE DECK SIZES  
**88" RD**




	SUPER S	SUPER 88
<b>ENGINE</b>		
Manufacturer	Kawasaki FS & FX series	Vanguard
HP	36" deck: 15HP - FS541, 19HP - FX600 48"/52" deck: 22HP - FX691 52"/60" deck: 27HP - FX850, 29.5HP - FX850 EFI (Per SAE J1995)	88" deck: 36HP - Big Block™ 88" deck: 37HP - Big Block™ EFI Oil Guard (Per SAE J1995)
Displacement	603cc - 852cc	993cc
Cooling		Air cooled
Air Cleaner	Heavy duty air canister (not standard on 36" deck)	Heavy duty air canister
Engine Warranty	3 year	5 year
<b>DRIVE SYSTEM</b>		
Type	Dual hydrostatic	Dual hydrostatic
Pumps	36" deck: Hydro-Gear® 10cc 48", 52", 60" deck: Hydro-Gear® 12cc	Hydro-Gear® 21cc
Wheel Motors	36" deck: Parker TL0195 48", 52", 60" deck: Parker TL0280	Parker TG0405
Speed	36": Up to 8 mph. 48", 52", 60": Up to 9 mph.	Up to 10 mph
Parking Brakes	Hand operated drum brakes	Hand operated drum brakes
<b>DECKS</b>		
Cutting Width	Side discharge: 36", 48", 52", 60"	Rear-discharge: 88"
Cutting Heights	1.5" - 5.5"	2" - 5.5"
Deck Lift	Hand operated.	Center Deck: Electric accuator. Wings: Manual lift with pull-out lift assist handles
Depth		5.5"
Blades	36": 2 48", 52", 60": 3	5
Blade Length	36" deck: 17.86" 48" deck: 16.50" 52" deck: 17.86" 60" deck: 20.50"	18.50"
Blade Tip Speed	36": 18,700 48": 18,500 52": 17,700 60": 18,400	16,800
Spindles	Ductile cast iron with steel shafts and sealed ball bearings	
Drive	Electric PTO clutch	
Construction	7 ga. Fabricated w/ 7 ga. wrappers	Fabricated 11 ga. welded steel
Spindle Mounts	36": 7ga. with 11 ga. doubler 48", 52", 60": 7 ga. with 7 ga. doubler	7 ga. doubler
Impact/Trim Areas	11 ga. formed channel with rolled edge	0.25 thick plate
Anti-scalp Wheels	n/a	Cast iron wing anti-scalp wheels with bearings with agriculture seals
<b>CONSTRUCTION</b>		
Frame	36": 1.5" x 2" steel tube 48" 52" 60": 1.5" x 3" steel tube	1.5" x 3" wall
Engine Plate	7 ga. with 11 ga. jackshaft doubler	7 ga.
Operator Platform	7 ga. with embossed tread pattern	7 ga.
Front Caster Wheels	Mounted tapered wheel bearings and debris cap	
Front Caster Forks	Fabricated 3/8" steel	Fabricated 1/2" steel
Operator Pad	Bolstered operator pad	
<b>GENERAL</b>		
Fuel Capacity	36": 6.5 gallons 48", 52", 60": 7.3 gallons	13.9 gallons
Front Tire	36" 11 x 4 - 5 48", 52": 13 x 5 - 6 60": 13 x 6.5 - 6	13 x 6.5 - 6
Drive Tire	36": 20 x 8 - 10 48", 52": 24 x 9.5 - 12 60": 24 x 12 - 12	26 x 12 - 12
Wing Tire	n/a	11 x 4 semi-pneumatic
<b>DIMENSIONS</b>		
Weight	36": 907 lbs 48": 1144 lbs 52": 1182 lbs 60" 1232 lbs	2057 lbs
Height	47.8"	50"
Length	36": 63.5" 48", 52": 68" 60": 70.75"	84"
Width w/Chute Up	36": 39" 48": 49.3" 52": 52.8" 60": 61.7"	91" w/ wings down 76" w/ wings up
Tire Width	36": 36.3" 48", 52": 45.8" 60": 49"	57"
Trim Side	36": 0.3" 48": 1.2" 52": 3.2" 60": 5"	18.8"
<b>PRODUCTIVITY*</b>		
Acres Per Hour	36": 2.33 48": 3.49 52": 3.79 60": 4.36	7.11

\* Number based on 80% efficiency. This rating is to account for actual mowing conditions including overlapping, turning and terrain. \*\* Specifications are subject to change without notice.

# SUPER 88

The most versatile stand-on in the industry.

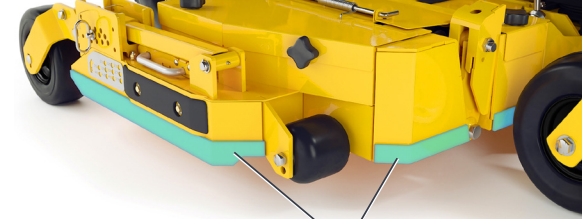


**Reinforced Impact Areas**  
1/4" thick steel wrapper added to the impact areas of the deck.

**Adjustable Foot Platform**  
Spring loaded suspension platform for all-day comfort.

**Vanguard Big Block™ Power**  
With oil guard option allowing for 500 hours between changes.

**Adjustable Speed Controls**  
Helps with training new operators.

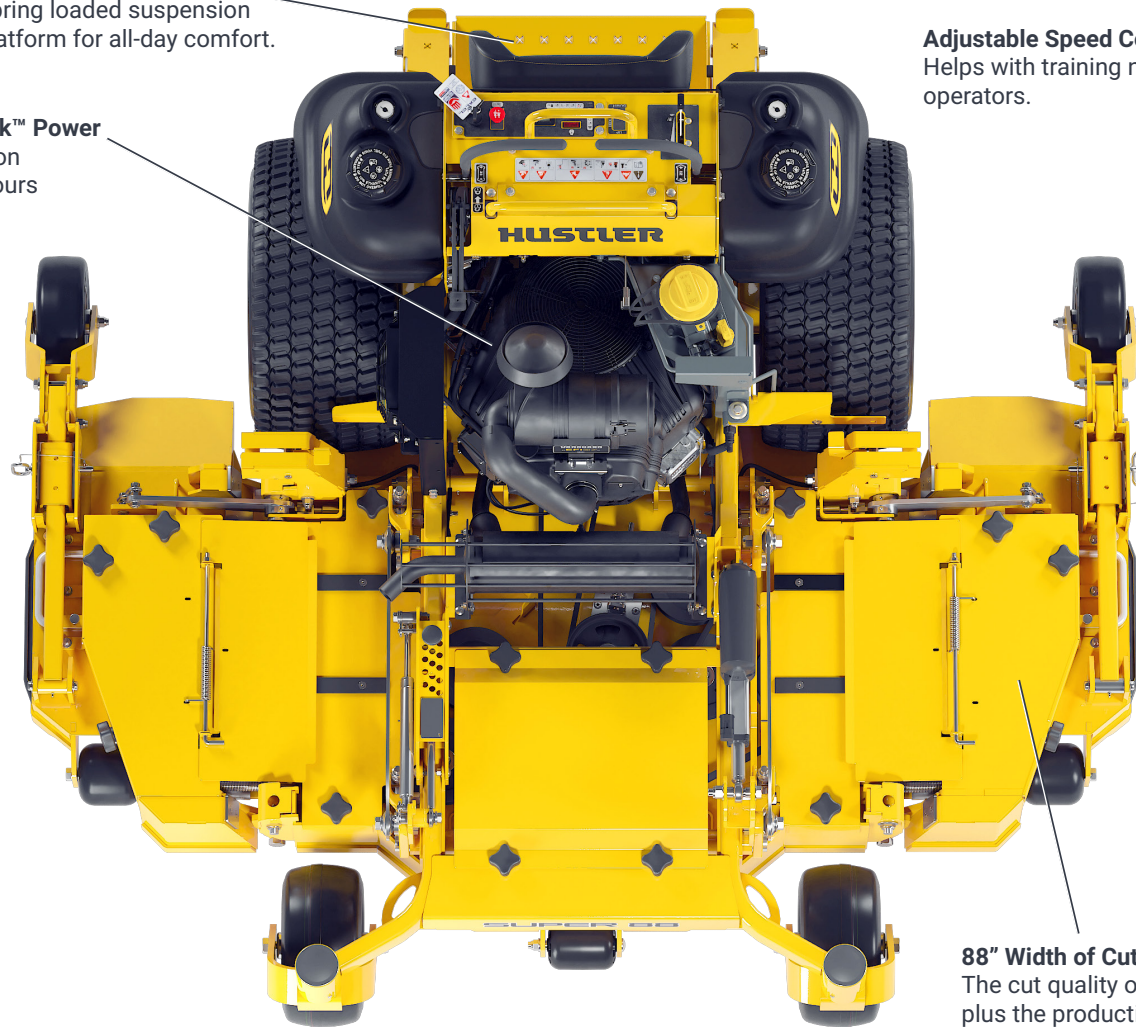

**88" Width of Cut**  
The cut quality of a 54" deck plus the productivity of an 88" deck.



**Designed to Flex with Landscape**  
The deck flexes to contour with the mowing surface providing improved cut quality and scalping prevention.



**76" Transport Width**  
Fits most trailers making it easy to transport from job-to-job.

LIMITED WARRANTY  
**2** YEAR | **NO** HOUR LIMIT

OR

LIMITED WARRANTY  
**5** YEAR | **500** HOUR



## THE SUPER S STAND-ON MOWER

### SUPER S

- ✔ **Compact Stance**  
Perfect for tight spaces and for trailering from job-to-job
- ✔ **Service Friendly Design**  
Designed to make maintenance and service fast and easy.
- ✔ **SmoothTrak™ Steering**  
Precision control to help trim and maneuver easily around obstacles.
- ✔ **VX Deck**  
Fabricated 7 ga. steel engineered for extreme vacuum for enhanced performance and cut quality.
- ✔ **Deck Options**  
36", 48", 52" and 60"



#### SUPER S ACCESSORIES

- ▶ Mulch kit
- ▶ Mesh side bagger (3 bushels)
- ▶ Metal side bagger (3.5 bushels)
- ▶ Light kit
- ▶ Stripe kit
- ▶ Trash basket
- ▶ Cup holder

#### SUPER 88 ACCESSORIES

- ▶ Mulch kit
- ▶ Mud Flap kit
- ▶ Light kit

LIMITED WARRANTY  
**2** YEAR | **NO** HOUR LIMIT

OR

LIMITED WARRANTY  
**5** YEAR | **500** HOUR