

**TRITON**  
TRAILERS

# ALUMINUM WATERCRAFT TRAILERS



BUILT FOR ADVENTURE. /

# WC2-2 & ELITE SERIES

WC2-2 and Elite Series trailers are heavy-duty trailers designed to fit all one-, two- and three-seat watercraft models. Trailers are available in two place and four place configurations.



- FULLY WELDED FRAME**  
The Triton difference - all-aluminum, fully welded frame provides a solid structure for years of loading and unloading. Custom extrusions and robust 3" x 3" frame provide added strength.
- TONGUE JACK AND RATCHET STRAPS**  
1000# swivel wheel tongue jack with 10" up/down travel helps you easily move the trailer into position. Rear ratchet straps secure machines and retract when not in use (2 straps per machine).
- ALL STAINLESS STEEL HARDWARE**  
Durable for use in salt water.
- DESIGNED TO FIT ALL WATERCRAFT MODELS**  
Adjustable 6' bunks and Infinite Slide Adjust (ISA) bow stop allow for proper fit of any personal watercraft, from one-seat to three-seat models.
- ADJUSTABLE BUNKS**  
Bunks can slide from left to right to properly accommodate the craft hull. Bunks can also be angled to perfectly cradle the craft.
- WALK PLANK AND MOLDED STEPS**  
Fenders with integral molded steps and an aluminum walk plank between machines provide multiple step points to access and tie down machines and gear.
- GALVANIZED TORSION AXLE**  
Independent suspension with four cord rubber torsion axle provides a smooth ride. WC2-2 & ELITE WCIV are standard with tandem torsion axles. ELITE WCII is standard with a single torsion axle.
- SEALED LED LIGHTS**  
Sealed lights and wiring harnesses throughout trailer resist corrosion caused by moisture.
- MULTIPLE TIE DOWNS**  
Four welded aluminum tie downs provide multiple points to secure crafts.
- KEEL GUARD**  
Non-marring, UV-resistant keel guard is positioned at a potential impact area to shield the craft.

## OTHER STANDARD FEATURES

Built-in circulating grease system in hubs

## POPULAR ACCESSORIES

Spare tire carrier and spare tire  
13" tires  
Aluminum wheels  
Galvanized wheels

# WC2-2 & ELITE SERIES MODELS



WC2-2 Pictured With Accessories



ELITE WCII Pictured With Accessories



ELITE WCIV Pictured With Accessories



## WC2-2

Two place watercraft trailer  
 Fits one-, two- or three-seat watercraft models  
 Galvanized tandem torsion axles  
 Optional surge disc or drum brakes on one axle or two axles

## ELITE WCII

Two place watercraft trailer  
 Fits one-, two- or three-seat watercraft models  
 Galvanized torsion axle

## ELITE WCIV

Four place watercraft trailer  
 Fits one-, two- or three-seat watercraft models  
 Galvanized tandem torsion axles  
 Surge disc brakes standard on one axle, optional on two axles

## ACCESSORIES

Longer tongue and wider frame provides ample room for spare tire, storage box and gas tray accessories.

- a. **05031-1** Aluminum diamond plate storage box  
 15.5" Front x 34" Back x 18.5"H x 18.5"D Elite Series
- b. **22815** Gas can tray
- c. **08519** Spare tire carrier (tire not included)

# WC2-2 & ELITE SPECIFICATIONS

	ELITE WCII	WC2-2	WC2-2 with Brakes	ELITE WCIV
<b>GVWR (lb.)</b>	2700	2995	4000	5400
<b>Carrying Capacity (lb.)</b>	2335	2445	3450	4200
<b>Trailer Weight (lb.)</b>	365	550	550	1200
<b>Overall Width (in.)</b>	101.5	102	102	102
<b>Overall Length (in.)</b>	189	201	208	343.5
<b>Hitch Height (in.)</b>	19	19	19	21
<b>Coupler Size (in.)</b>	2	2	2	2
<b>Special Order</b>	No	Yes	Yes	Yes
<b>Standard Tire and Wheel</b>	08875 ST145/R12E	08875 ST145/R12E	08875 ST145/R12E	08875 ST145/R12E
<b>Tire and Wheel Options</b>	03392 ST175/80D13C 09942 ST175/80D13C ALUM. 10384 ST145/R12E ALUM.	03392 ST175/80D13C 09942 ST175/80D13C ALUM. 10384 ST145/R12E ALUM.	03392 ST175/80D13C 09942 ST175/80D13C ALUM. 10384 ST145/R12E ALUM.	03392 ST175/80D13C 09942 ST175/80D13C ALUM. 10384 ST145/R12E ALUM.
<b>Brakes</b>	N/A	N/A	Surge Disc or Drum on one or two axles	10" Surge Disc on 1 axle. Surge Disc option available on 2nd axle.

Overall lengths are based on the bunks setup in the farthest position to the rear of the trailer. Hitch height is based on standard tires, upgraded tires will change loaded hitch heights. Prices and specifications may change without notice. Please note: It is the responsibility of the purchaser to adhere to the brake laws regarding trailers. For full information on the laws in your state, contact the appropriate State Motor Vehicle Department. Brake options will change the overall length of trailer. Recommended tongue weight 7-10% of GVWR. Five year limited warranty when registered online within 45 days of purchase at tritontrailers.com. Non-registered trailers have one year warranty.

# LT SERIES

LT Series trailers are designed to fit most one-, two- and three-seat watercraft models. Trailers are available in one place and two place configurations.



LTWCII-X Pictured With Accessories

- 1 FULLY WELDED FRAME**  
The Triton difference - all-aluminum, fully welded frame provides a solid structure for years of loading and unloading. Custom extrusions and robust 2" x 3" frame provide added strength.
- 2 TONGUE JACK AND RATCHET STRAPS**  
Standard on LTWCI-X, LTWCI-TX, LTWCII-X models only. 1000# swivel wheel tongue jack with 10" up/down travel helps you easily move the trailer into position. Rear ratchet straps secure machines and retract when not in use. (2 straps per machine).
- 3 DESIGNED TO FIT ALL WATERCRAFT MODELS**  
Adjustable 6' bunks and Infinite Slide Adjust (ISA) bow stop allow for proper fit of any personal watercraft, from one-seat to three-seat models.
- 4 ADJUSTABLE BUNKS**  
6' bunks can slide from left to right to properly accommodate the craft hull. Bunks can also be angled to perfectly cradle the craft.
- 5 TIE DOWNS**  
Welded aluminum tie downs provide multiple points to secure crafts. LTWCI, LTWCI-X models have 6 tie downs. LTWCII, LTWCII-X models have 2 tie downs.
- 6 GALVANIZED AXLE**  
Galvanized axle for corrosion resistance. LT Series models are standard with single spring axle except model LTWCI-TX is standard with single torsion axle.
- 7 SEALED LED LIGHTS**  
Sealed lights and wiring harnesses throughout trailer resist corrosion caused by moisture.
- 8 KEEL GUARD**  
Non-marring, UV-resistant keel guard is positioned at a potential impact area to shield the craft.

## OTHER STANDARD FEATURES

Built-in circulating grease system in hubs

## POPULAR ACCESSORIES

Spare tire carrier and spare tire  
Stainless steel hardware  
Aluminum wheels  
Galvanized wheels

# LT SERIES MODELS



LTWCII Pictured

## LTWCII-X

Two place watercraft trailer  
Fits one-, two- or three-seat watercraft models  
Tongue jack  
Retractable ratchet straps  
Galvanized spring axle

## LTWCII

Two place watercraft trailer  
Fits one-, two- or three-seat watercraft models  
Galvanized spring axle



LTWCI-X Pictured

## LTWCI-TX

One place watercraft trailer  
Fits one-, two- or three-seat watercraft models  
Tongue jack  
Retractable ratchet straps  
Galvanized torsion axle

## LTWCI-X

One place watercraft trailer  
Fits one-, two- or three-seat watercraft models  
Tongue jack  
Retractable ratchet straps  
Galvanized spring axle

## ACCESSORIES



**08519**  
Spare tire carrier (tire not included)



**22815**  
Gas can tray

## LTWCI

One place watercraft trailer  
Fits one-, two- or three-seat watercraft models  
Galvanized spring axle

## LT SPECIFICATIONS

	LT WCI LTWCI-X		LTWCI-TX		LT WCII LT WCII-X
GVWR (lb.)	1980	2000	1980	2000	2500
Carrying Capacity (lb.)	1785	1805	1770	1790	2180
Trailer Weight (lb.)	195	195	210	210	320
Overall Width (in.)	59.5	59.5	59.5	59.5	96
Overall Length (in.)	181.5	181.5	181.5	181.5	181
Hitch Height (in.)	20	20	20	20	18
Coupler Size (in.)	2	2	2	2	2
Standard Tire and Wheel	06509 4.80 X 12C		06509 4.80 X 12C		08875 ST145/R12E
Tire and Wheel Options	08875 ST145/R12E 10384 ST145/R12E ALUM.		08875 ST145/R12E 10384 ST145/R12E ALUM.		10384 ST145/R12E ALUM.

Overall lengths are based on the bunks setup in the farthest position to the rear of the trailer. Hitch height is based on standard tires, upgraded tires will change loaded hitch heights. Prices and specifications may change without notice. Please note: It is the responsibility of the purchaser to adhere to the brake laws regarding trailers. For full information on the laws in your state, contact the appropriate State Motor Vehicle Department. Brake options will change the overall length of trailer. Recommended tongue weight 7-10% of GVWR. Five year limited warranty when registered online within 45 days of purchase at [tritontrailers.com](http://tritontrailers.com). Non-registered trailers have one year warranty.

# WAVE SERIES

The WAVE Series is designed specifically for compact watercraft models such as the Sea-Doo® Spark®, Kawasaki® SX-R™ and Yamaha® EX™. Trailers are available in one place and two place configurations.



08519 Spare tire carrier (tire not included)

WAVE Pictured With Accessories

WAVE II Pictured With Accessories

- 1 **FULLY WELDED FRAME**  
The Triton difference - all-aluminum, fully welded frame provides a solid structure for years of loading and unloading. A dual-bowed design cradles compact watercraft, providing a lower launch height.
- 2 **60" TONGUE**  
Long 60" tongue for easy trailer maneuvering and launching.
- 3 **DESIGNED TO FIT COMPACT WATERCRAFT MODELS**  
Adjustable 5' bunks fit compact watercraft, and the bow stop roller is movable up, down and along the tongue for a proper fit.
- 4 **ADJUSTABLE BUNKS**  
5' bunks adjust from left to right to properly accommodate the craft hull, and can also be angled to perfectly cradle the craft.
- 5 **GALVANIZED AXLE**  
Galvanized spring axle for corrosion resistance.
- 6 **SEALED LED LIGHTS**  
Sealed lights and wiring harnesses throughout trailer resist corrosion caused by moisture.
- 7 **KEEL GUARD**  
Non-marring keel guard and capped ends shield your craft at potential impact area. Both are UV-resistant.
- 8 **TIE DOWNS**  
Four welded aluminum tie downs provide multiple points to secure watercraft.

## WAVE SPECIFICATIONS

	WAVE (one place)	WAVE II (two place)
GVWR (lb.)	920	1800
Carrying Capacity (lb.)	750	1500
Trailer Weight (lb.)	170	300
Overall Width (in.)	55	96
Overall Length (in.)	148	164.25
Hitch Height (in.)	18	18
Coupler Size (in.)	2	2
Standard Tire and Wheel	03446 4.80 X 8C Steel	06509 4.80 x 12C Steel
Tire and Wheel Option	06509 4.80 X 12C Galvanized	06509-G 4.80 x 12C Galvanized 10384 ST145/R12 LRE Aluminum


### POPULAR ACCESSORIES

- Spare tire carrier and spare tire
- Stainless steel hardware
- Galvanized wheels

Overall lengths are based on the bunks setup in the farthest position to the rear of the trailer. Hitch height is based on standard tires, upgraded tires will change loaded hitch heights. Prices and specifications may change without notice. For full information on the laws in your state, contact the appropriate State Motor Vehicle Department. Recommended tongue weight 7-10% of GVWR. Five year limited warranty when registered online within 45 days of purchase at tritontrailers.com. Non-registered trailers have one year warranty.

# LXT-LK SERIES MODELS

Designed specifically for the silent sports enthusiast, the LXT-LK Series carries kayaks, surfboards, sailboards and canoes. Choose two-place, four-place, or six-place rack systems to outfit the trailer for your gear.

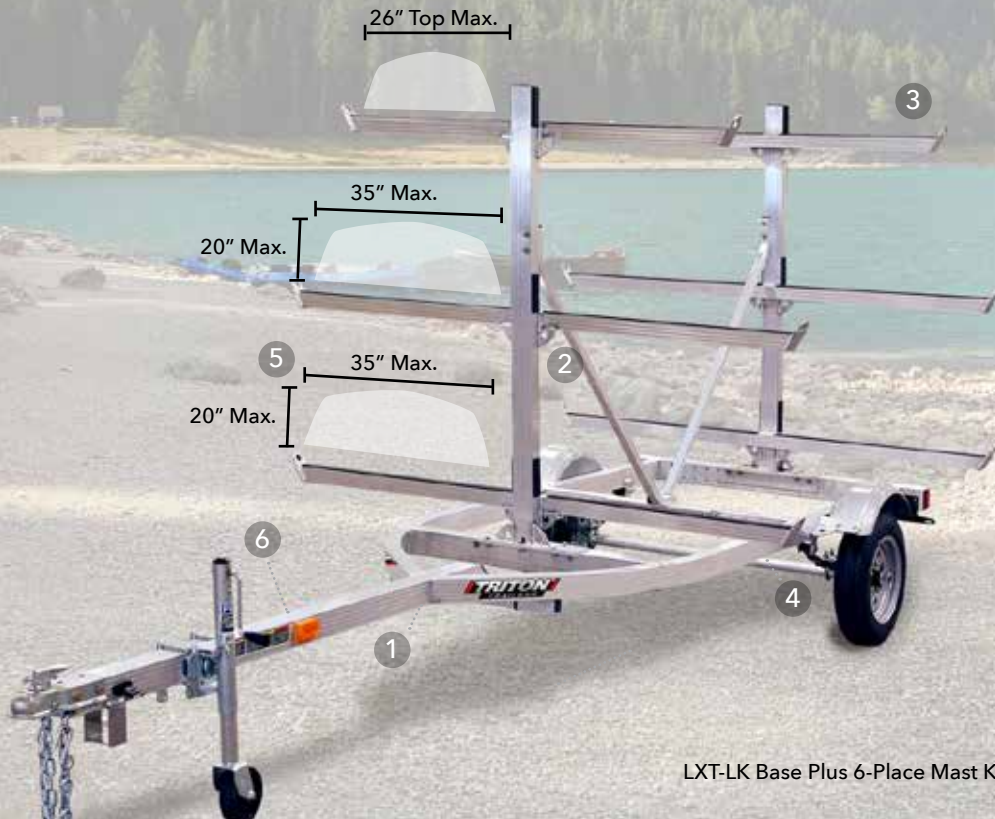

LXT-LK Base Plus 6-Place Mast Kit Pictured With Accessories

- 1 FULLY WELDED FRAME**  
The Triton difference - all-aluminum, fully welded frame provides a solid structure for years of loading and unloading.
- 2 TIE DOWNS**  
Welded tie down tabs on all racks provide multiple points for cargo security.
- 3 CARRIES UP TO SIX CRAFTS**  
Rack system with cushioned rails is designed for flat hull crafts and provides two-place, four-place or six-place carrying capacity.
- 4 GALVANIZED AXLE**  
Leaf spring axle with galvanized beam.
- 5 ACCOMMODATES MULTIPLE KAYAK TYPES**  
Designed to accommodate most recreational kayaks, touring kayaks, sea kayaks and sit-on-top kayaks. Check the dimensions of your craft(s) for proper fit.
- 6 SEALED LIGHTS**  
Sealed lights and wiring harnesses throughout trailer resist corrosion caused by moisture.

## LXT-LK SPECIFICATIONS

	LXT-LK
Max Length Of Boat (ft.)*	19
Number Of Kayaks	2 - Base, 4 - Place Mast or 6 - Place Mast
GVWR (lb.)	1500
Carrying Capacity (lb.)	1265
Carrying Capacity per Position (lb.)	500
Trailer Weight (lb.)	235
Overall Width (in.)	76.25
Overall Length (in.)	180
Arm Spacing (in.)**	81 - Base, 76 - 4 or 6 Place Mast
Arm Length (in.)***	35, 26 top of 6 Place Mast
Loaded Hitch Height (in.)	20
Standard Tires	4.80 X 12C

### POPULAR ACCESSORIES

Spare tire carrier and spare tire  
Swivel wheel tongue jack

\*4-5' behind trailer, check local regulations  
\*\* Arm spacing measures from front arm to back arm(s)  
\*\*\* Arm length measures from center mast to end of arm except base  
Prices and specifications may change without notice. Recommended tongue weight 7-10% of GVWR. Five year limited warranty when registered online within 45 days of purchase at tritontrailers.com. Non-registered trailers have one year warranty.

# **TRITON**

## TRAILERS



[www.tritontrailers.com](http://www.tritontrailers.com)



Snowmobile Trailers



Off Road Vehicle Trailers



Multi-Season Enclosed Trailers



Cargo & Utility Trailers



Personal Watercraft Trailers

AUTHORIZED DEALER:

Contact your local authorized Triton Trailers dealer for more information.



Transport Canada



**NATDA**  
North American Trailer Dealers Association

